


INSTALLATION INSTRUCTIONS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.

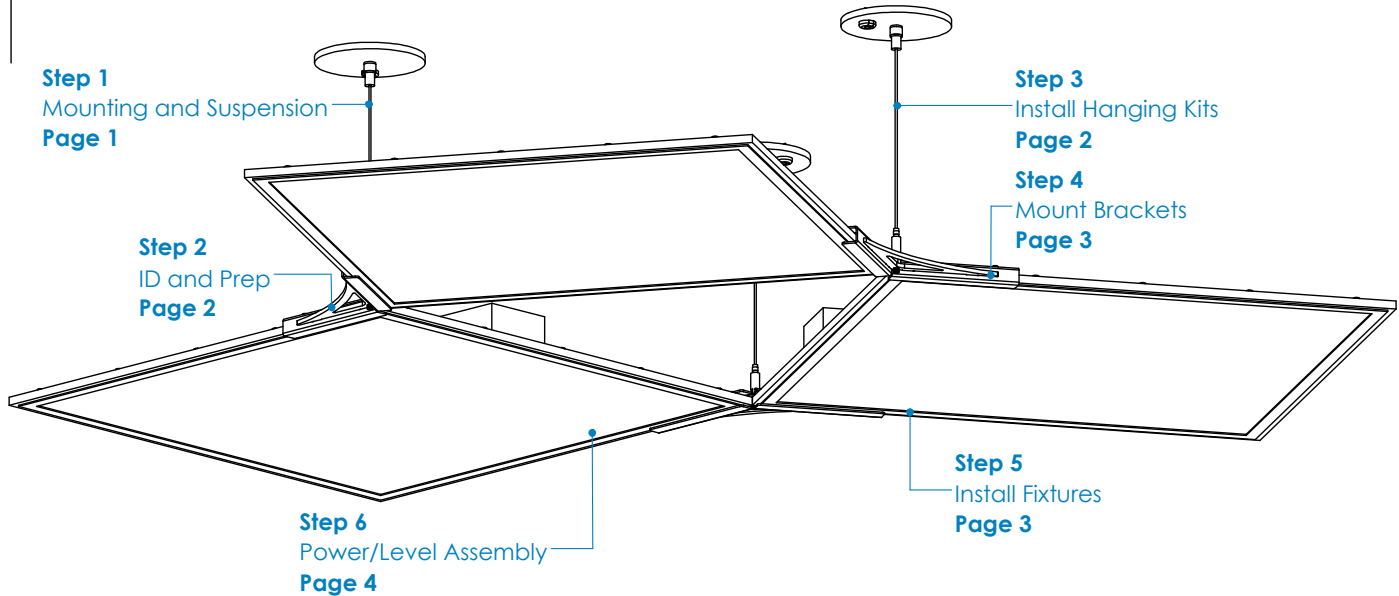

Step 1 - Mounting and Suspension

Mounting

Drywall or other hard surfaces


- Install hanging kits at suspension locations.
- Ensure hanging kits are secure.
- Prepare fixture for mounting.

*Other hard surfaces include: wood, sheet metal panels, steel beams, concrete or masonry. Use hardware appropriate for each surface and material type.

Suspension Locations

X = Suspension Dimensions


Refer to Assembly Drawings and building plans to determine exact mounting, suspension points, and power feed locations.

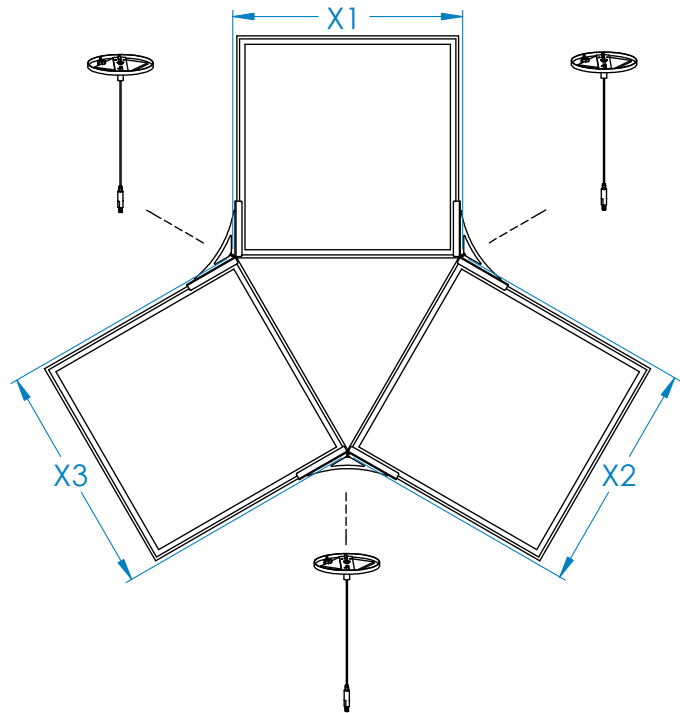

INSTALLATION INSTRUCTIONS


Step 2 - Identification and Preparation

A. Identify Fixtures

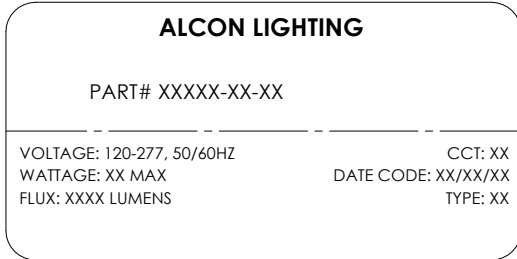

- Use labels found on the box and inside the fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.


B. Tools Needed

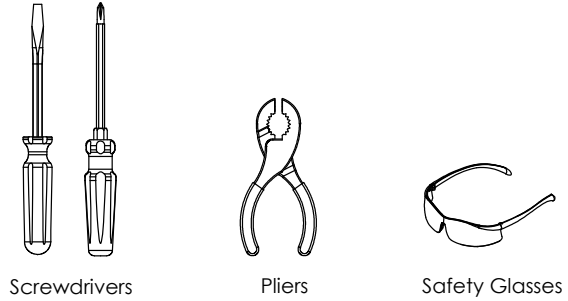

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.


Step 3 - Install Hanging Kits

A. Install NPF Kit

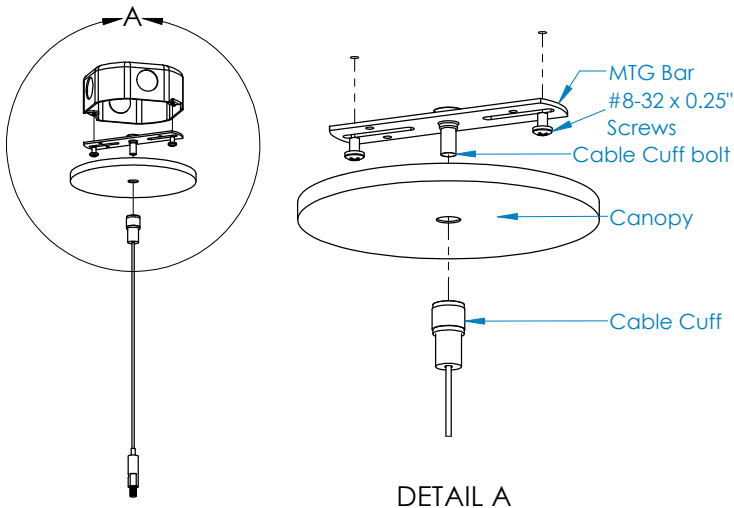

- Secure mounting bar to existing junction box using (2) #8-32 x .25" machine screws.
- Install the canopy over the cable cuff bolt with outside edge facing upwards.
- Secure cable cuff to the bolt, and tighten 1/4 turn with pliers.

B. Install PF Kit

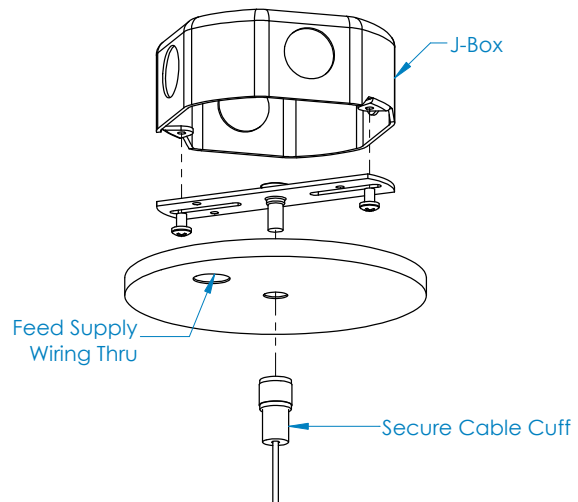


- Repeat previous steps to install mounting bar to junction box.
- Feed supply wiring thru the canopy prior to install.
- Repeat previous steps to install the cable cuff to the bolt.

INSTALLATION INSTRUCTIONS


Step 4 - Mount Brackets

A. Attach Brackets to Cables

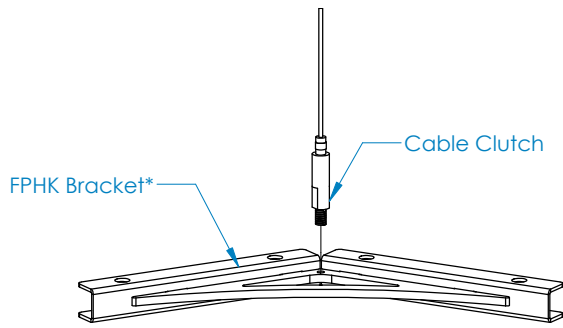

- Attach the brackets to the threaded ends of the hanging kit cables.
- Secure the bracket to the cable end and tighten 1/4 turn using pliers. Repeat for all remaining brackets.


B. Align Brackets

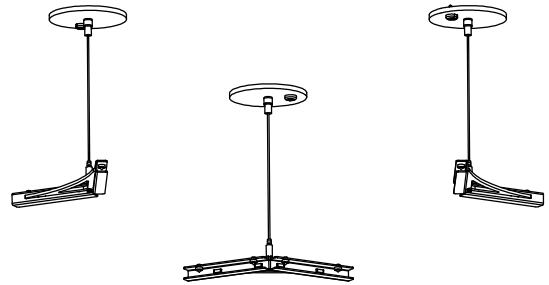

- Align brackets to approximate shape of fixtures that will be installed, by rotating pendant cables or brackets as needed. Repeat for all remaining brackets.


Step 5 - Install Fixtures

A. Slide Fixture Into Place

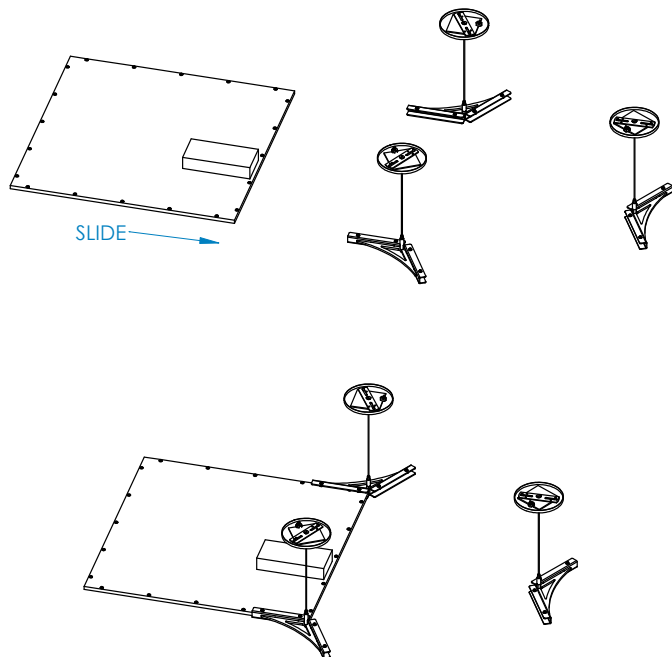

- Slide one fixture into place at a time, ensuring that the fixture is properly aligned.

B. Secure Fixture

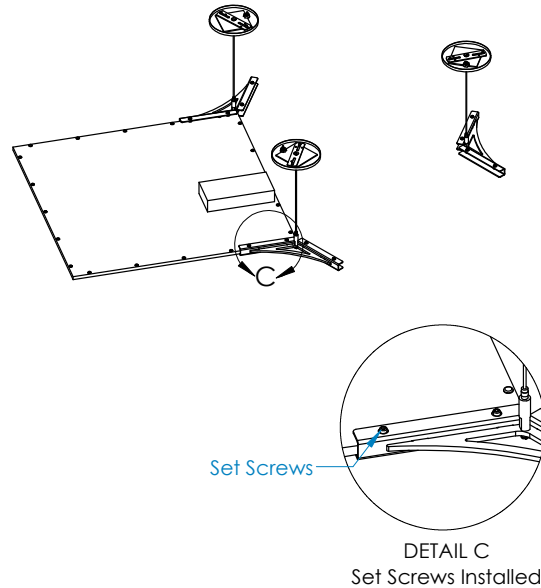


- Once the fixture is in place, use (4)* set screws to secure the fixture in the correct position.
- Ensure that both brackets holding the fixture have all necessary set screws. Repeat steps for all remaining fixtures. This step will be the same for every bracket variation.

INSTALLATION INSTRUCTIONS


Step 5A - Install Fixtures (Alternate Configuration)

A. Slide Fixtures Into Place

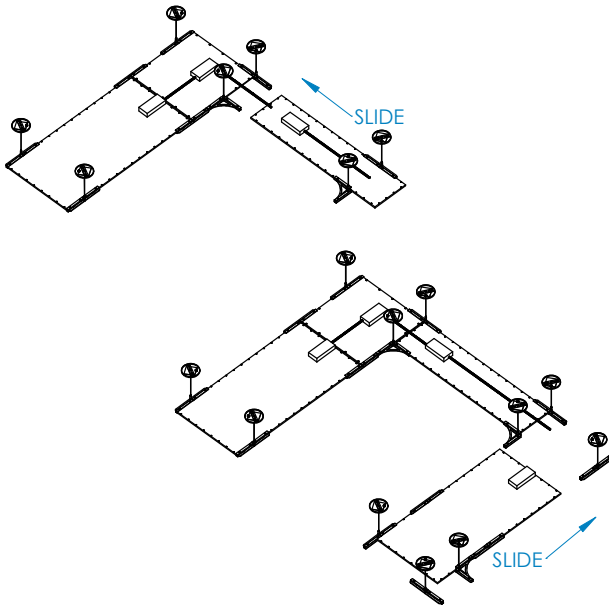

- Slide one fixture into place at a time, ensuring that the fixture is properly aligned.
- This page shows the installation steps for an alternate configuration.


B. Secure Fixtures

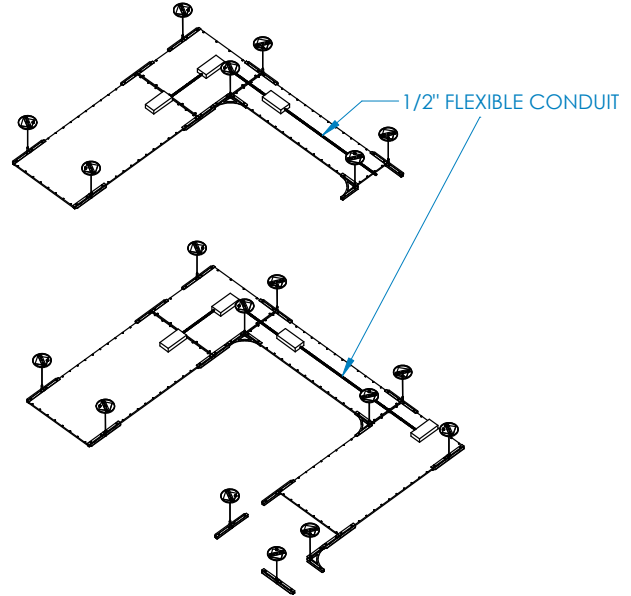

- Once the fixture is in place, use (4)* set screws to secure the fixture in the correct position.
- Ensure that both brackets holding the fixture have all necessary set screws. Repeat steps for all remaining fixtures in the configuration.

Step 6 - Power and Level Assembly


A. Connect Fixture Wiring

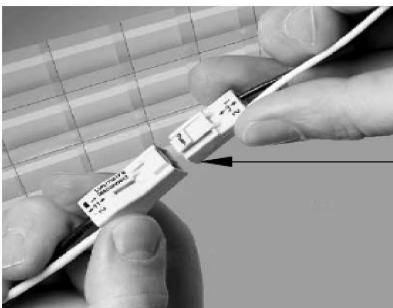

WIRING LEGEND		
BLACK	HOT	Line Voltage
WHITE	NEUTRAL	Line Voltage
GREEN	GROUND	
GRAY	DIMMING	0-10V DC
VIOLET	DIMMING	0-10V DC

- Wire each fixture to the incoming power supply using the provided quick disconnect clip as shown.*
- For dimming option, refer to wiring legend above.
- Use UL approved connectors only. Follow all local, state and national codes. Repeat for all remaining fixtures.

B. Level Assembly

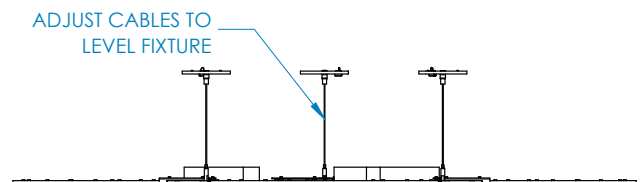

- Make final adjustments of cables, ensuring fixture is level.
- Fixture install is now complete.