


ElectraLED®

TLC Series Track Light Fixture

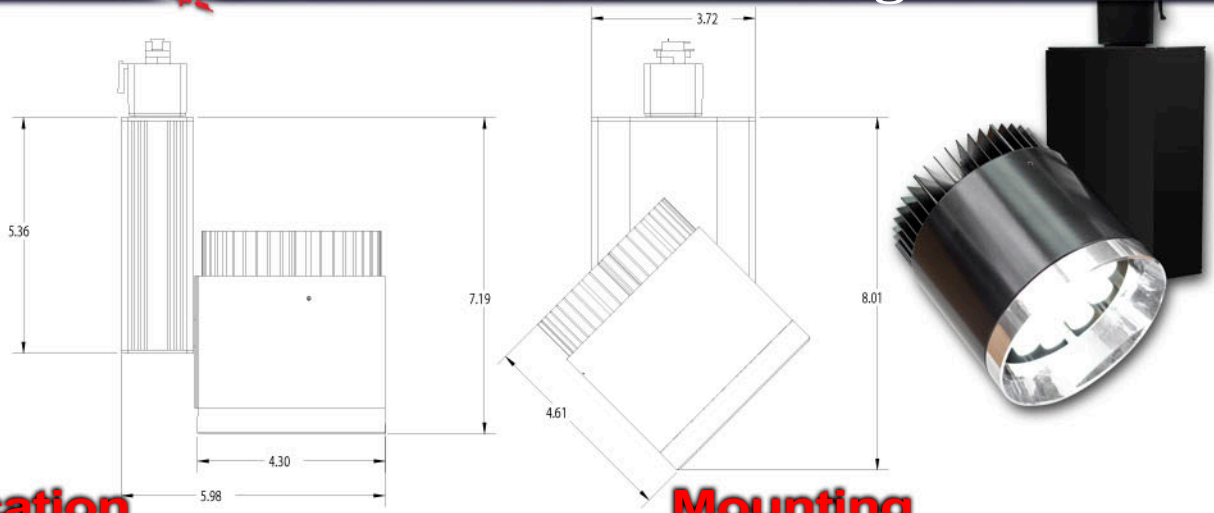

Application

- Retail, commercial, accent and display lighting

Construction

- Aluminum housing
- Robust thermal platform
- Extruded aluminum power supply housing
- Polycarbonate lens system
- Powder coat paint

Lumen Output

CCT(K)	TLC-05	TLC-10	TLC-15
• 2700	725	1,450	1,965
• 3000	750	1,500	2,025
• 3500	830	1,660	2,250
• 4000	850	1,700	2,295

Performance Data

	TLC-05	TLC-10	TLC-15
• Voltage (VAC):	120 - 277	120 - 277	120 - 277
• Input (Watts):	13.2	26.4	38.2
• Input Power Factor:	>0.9	>0.9	>0.9

Ordering Guide

Model	Finish	CCT (K)	Beam Angles
TLC-05	B - Black	27 - 2700	RS - Real Spot, 12°
TLC-10	W - White	30 - 3000	DD - Diffused, 25°
TLC-15	S - Silver	35 - 3500	MM - Flood, 40°
	C - Custom	40 - 4000	
		50 - 5000	

Example: TLC-15W30DD

Mounting

- Available for track, canopy and busway

Optics

- High performance LED light engine
- Color Temp: 2700K, 3000K, 3500K, 4000K
- CRI: 85+
- L70 Life: 64,000 hours
- High CRI Available

Labeling

- UL and CUL listed



NAICS Code #335122 / 333414 / 335110
GAGE/NCAGE #58AB4 • GSA schedule #56