




# 5800 Series

## Half Moon

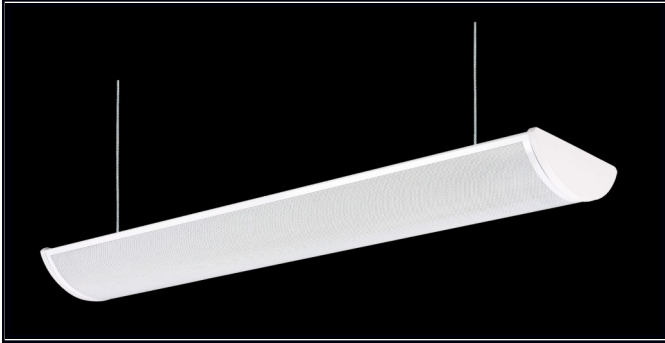

### General Characteristics:

Lamp Type: 2, 3, 4 or 6 Lamp T5 or T8  
 Ballast Type: Electronic Ballast  
 Standard Voltage: 120 (Universal 120- 277 optional)  
 Options: Dimming Ballast, Emergency Ballast, Dual Cable Kit, With Lamps, Wireguard, GE Covrguard Shatter Resistant Lamps, Joiner Cable, Chain or Pendant (**Mounting Hardware is Sold Separately**)  
 Mounting:  
 Additional Info.: UL Listed & Title 24 Compliant

Catalog Ordering: Example: 5848-232-DIM-WL


<b>58</b>					
-----------	--	--	--	--	--

Catalog No.	Type:
Job Name:	

### Specifications & Features:

A modern direct/indirect fixture in a bright white finish and perforated baffle with white opal acrylic inlay for attractive glare free lighting in offices, conference rooms, reception areas and classrooms.

- Housing made from die formed heavy-gauge pre-painted cold rolled steel
- Baffle is made of cold rolled steel with 5/64" diameter micro-perforations at staggered 7/64" intervals
- Hinged baffle for quick easy lamp access
- Diffuser is made of .020 white opal acrylic
- End-caps are molded white plastic
- Finished in a white polyester polymer with a minimum of 82% reflectivity
- Available in a variety of lamp configurations
- Suitable for damp location
- Optional Joiner assembly for continuous runs and tandem configurations
- Dual Cable Kit option available (**Mounting Hardware is Sold Separately**)

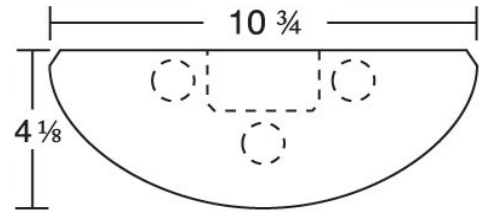

FAMILY TYPE	LENGTH IN INCHES/ LAMPING	# OF BALLASTS	VOLTAGE	OPTIONS
58	48-132 (1- F32T8)	/1	120 (120 Volt)	DIM (Dimming Ballast)
	48-232 (2- F32T8)	/2	UNV (120-277 Volt)	EMR (450 Lumen Emergency Ballast)
	48-332 (3- F32T8)			EMR 1400 (1400 Lumen Emergency Ballast)
	96-132T (2- F32T8)			DC (Dual Cable)
	96-232T (4- F32T8)			WL (With Lamps)
	96-332T (6- F32T8)			WLCG (GE Covrguard Shatter Resistant Lamps)
	48-128 (1- F28T5)			JNR (Joiner)
	48-228 (2- F28T5)			
	48-328 (3- F28T5)			
	48-154 (1- F54T5HO)			
	48-254 (2- F54T5HO)			
	48-354 (3- F54T5HO)			
	96-128T (2- F28T8)			
	96-228T (4- F28T5)			
	96-328T (6- F28T5)			
	96-154T (2- F54T5HO)			
	96-254T (4- F54T5HO)			
	96-354T (6- F54T5HO)			

Specifications and Dimensions Subject to change without notice

FSC 12120 Altamar Place, Santa Fe Springs, CA 90670 Ph 562-906-2644 Fax 562-906-2649

