

Gotham Architectural Downlighting
Renovation LED Downlights

4" Evo®
A-Series LED, Open/Wallwash Reflector, Retrofit Kit

Solid-State Lighting

FEATURES

OPTICAL SYSTEM

- Self-flanged semi-specular, matte-diffuse or specular lower reflector
- Patented Bounding Ray™ optical design (U.S. Patent No. 5,800,050)
- 45° cutoff to source and source image
- Top-down flash characteristic

MECHANICAL SYSTEM

- See Mounting Frame Compatibility chart for compatible Gotham mounting frames
- Junction box capacity: 8 (4 in, 4 out) 12AWG rated for 90°C
- 1-1/4" maximum ceiling thickness

ELECTRICAL SYSTEM

- Fully serviceable and upgradeable LED light engine

- 70% lumen maintenance at 50,000 hours based on IESNA LM-79-2008
- 120-277VAC, 50/60hz power supply with 0-10V dimming (10-100%); rated for 50,000-hour life
- Overload and short circuit protected

LISTINGS

- Fixtures are CSA certified to meet US and Canadian standards; wet location, covered ceiling

WARRANTY

- 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

ORDERING INFORMATION

EXAMPLE: ALEDR 35/10 4AR 120

Series ¹	Color temperature	Nominal lumen values	Aperture/Trim color	Trim type	Finish	Voltage
ALEDR	27/ 2700 K	06 600 lumens	4AR Clear	(blank) Downlight	(blank) Semi-specular	120
	30/ 3000 K	10 1000 lumens	4PR Pewter	W Wallwash	LD Matte diffuse	277
	35/ 3500 K	14 1400 lumens	4WTR Wheat		LS Specular	347
	41/ 4100 K	18 1800 lumens	4GR Gold			
			4WR ² White			

Driver	Options
(blank) ³ 0-10V dimming driver. Minimum dimming level 10%	SF Single fuse
ECOS ^{3,4} Lutron Hi-Lume® dimming driver. Minimum dimming level 1%	LRC Lithonia Reloc® system
	NSD ⁵ Sensor Switch nLight™ dimming relay
	TRW ⁶ White painted flange
	TRBL Black painted flange
	ELR ⁷ Emergency battery pack with remote test switch

ACCESSORIES order as separate catalog numbers (shipped separately)

- CTA6 YKLED Ceiling thickness adapter (extends mounting frame to accommodate ceiling thickness up to 2").
- ISD BC 0-10V wallbox dimmer. Refer to [ISD-BC](#).

NOTES

ORDERING NOTES	
1. Consult factory for mounting frames other than Gotham.	5. One 5A relay with one 0-10 VDC dimming output, shipped installed. Requires additional nLight bus power supply (nPS80).
2. Not available with finishes.	6. Not available with white reflector.
3. Refer to TECH-240 for compatible dimmers.	7. For dimensional changes, refer to TECH-140 .
4. CSA certified for US only.	


4" EVO

A-Series LED, Open/Wallwash Reflector, Retrofit Kit
Solid-State Lighting



DIMENSIONAL DATA

All dimensions are inches (centimeters) unless otherwise noted.

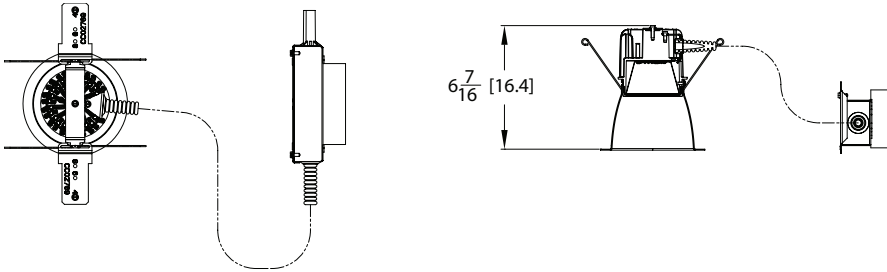

Aperture: 4-5/16 (11)
Ceiling Opening: 5-1/8 (13)
Overlap Trim: 5-7/16 (13.8)

DETERMINING MOUNTING FRAME COMPATIBILITY

Mounting frame must be a Gotham mounting frame series GRS, GRSF, GRSH, AFV, or LGFV. If not, please contact Gotham Technical Support at 800-315-4982 for additional solutions.

Step 1 – Measure

- a. Measure the inside diameter of the aperture opening.
- b. Measure the available plenum depth.

Step 2 – Verify

- a. If the measured mounting frame diameter matches and measured plenum depth is greater than listed in Table 1:

Then, the mounting frame is compatible with Gotham ALED.

If the frame is not compatible, please contact Gotham Technical Support for more options.

Notes:

- 1. CTA6 YKLED is required for use with 6.63" inside diameter mounting frame.


Table 1

	Inside Diameter of Mounting Frame	Minimum Plenum Depth
4" downlight/wallwash	4.87"	6.938"
6" downlight	6.63" ¹	8.500"
	6.87"	8.000"
6" wallwash	6.63"	N/A
	6.87"	8.000"
8" downlight/wallwash	8.18"	9.125"
	8.60"	9.125"

Distribution Curve Distribution Data Output Data Coefficient of Utilization Illuminance: Single Luminaire 30" Above Floor


ALEDR 35/6 4AR LS

INPUT WATTS: 15.6, DELIVERED LUMENS: 757.7, LM/W=48.6, 1.6 S/MH, TEST NO. LTL21260

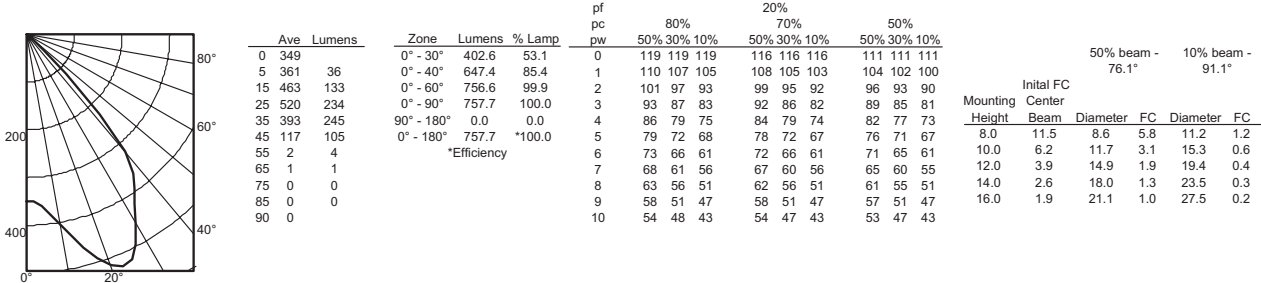


ALEDR 35/10 4AR LS

INPUT WATTS: 20.6, DELIVERED LUMENS: 1039.0, LM/W=50.4, 1.5 S/MH, TEST NO. LTL21209

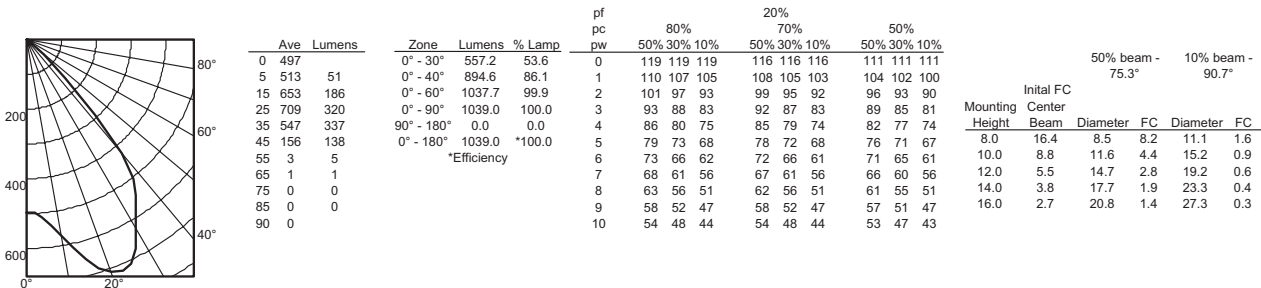


ALEDR 35/14 4AR LS

INPUT WATTS: 26.2, DELIVERED LUMENS: 1431.9, LM/W=54.7, 1.5 S/MH, TEST NO. LTL21213

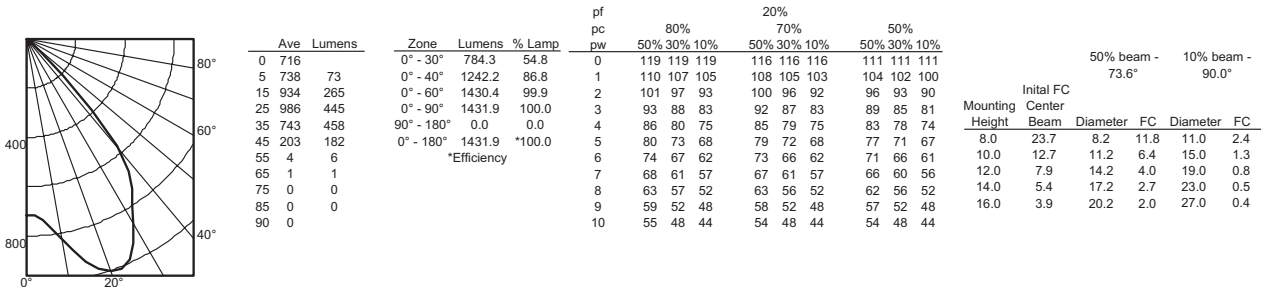

ALEDR 35/18 4AR LS

INPUT WATTS: 29.0, DELIVERED LUMENS: 1682.7, LM/W=58.0, 1.5 S/MH, TEST NO. LTL21149

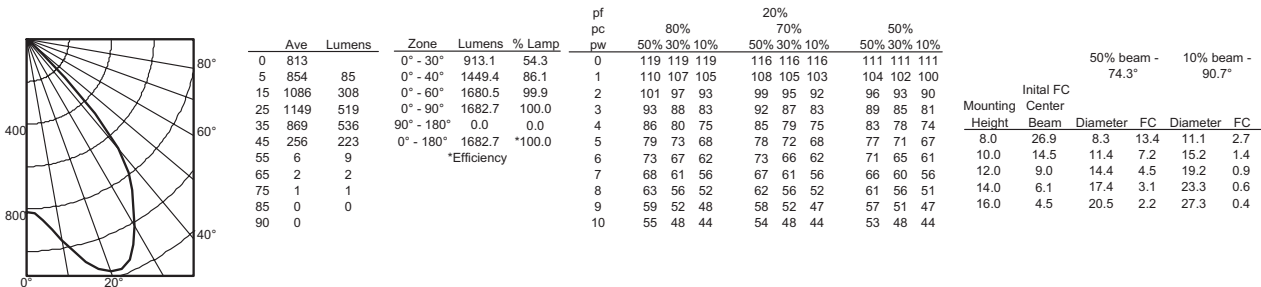

PHOTOMETRY NOTES

- Tested in accordance with IESNA LM-79-08.
- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- Actual performance may differ as a result of end-user environment and application.
- Actual wattage may differ by +/- 10% when operating between 120-277V +/- 10%.
- CRI: 83 typical.
- Consult factory or IES file for microgroove baffle, black cone or other photometric reports.