

# Panthella Table


Table & Floor

Design: Verner Panton

Type:


Project:

Catalog Number:

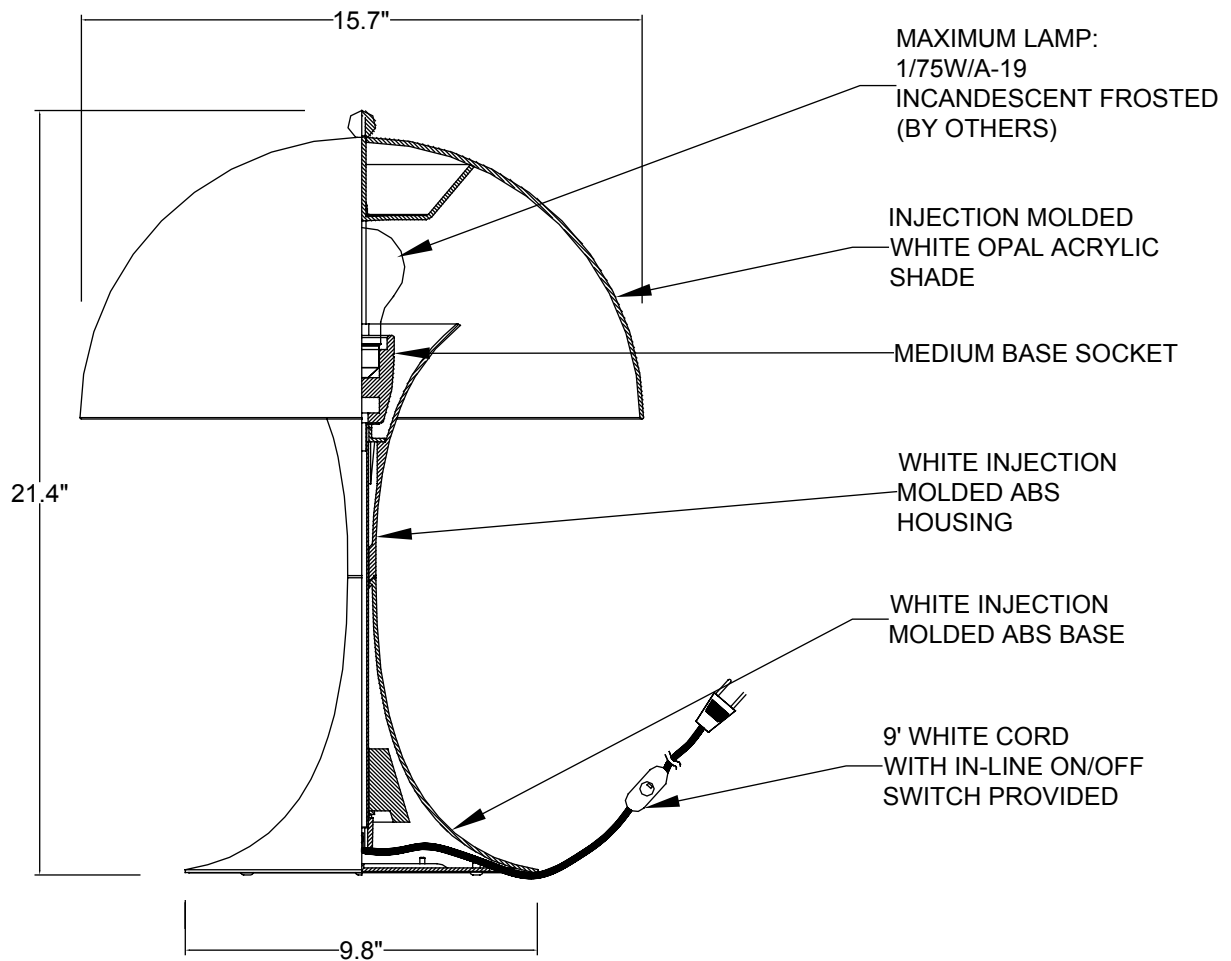

# Panthella Table

Table & Floor



Photometric Report: PAN-T-1-75W-A19-IF.IES  
 Report No.: L6411  
 Poulsen Report No.: PAN-T-1-75W-A19-IF.IES  
 Luminaire: PAN-T-1-75W-A19  
 Lamp: 1-75W-A19  
 Efficiency: 73.1%  
 Description: All data shown are per 1220 lumens. This report can be used for calculation on all versions. Use only actual lumen data when calculating.

Candlepower Distribution

Vertical Angle	Candela
0	212.8
5	212.4
10	210.2
25	198.8
35	174.9
45	138.7
55	104.1
65	75.9
75	67.2
90	78.8
120	142.9
150	195.5
180	166.7

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Fixture
0-30	170.54	7.8	10.6
0-40	279.67	12.7	17.4
0-60	479.94	21.8	29.8
0-90	707.75	32.2	44
90-120	345.19	15.7	21.5
90-130	482.51	21.9	30
90-150	733.18	33.3	30
90-180	900.12	40.9	56
0-180	1607.87	73.1	100

Weblink: 226

Design: Verner Panton

Light Concept: The fixture emits a soft and comfortable illumination. The hemispherical shade reflects the light downwards, and the material used ensures that the majority of the light is spread diffusely in the room from the surface of the shade.

Finish: White opal acrylic.

Material: Base: White, injection molded ABS. Shade: Injection molded white opal acrylic. Housing: White, injection molded ABS.

Mounting : Cord type: White. Cord length: 9'. Switch: In-line on/off switch provided.

Weight: Max. 7.7 lbs.

Label: cULus, Dry location. IBEW.

Product code	Light source	Voltage	Finish
PAN-T	1/75W/A-19/IF medium	120V	WHT

Info notes  
 I. The comparable EU version has the following classification: Ingress Protection Code: IP20.

