




## 2' X 4' FLUORESCENT RECESSED DIRECT/INDIRECT

Twilite  
OD  
Series

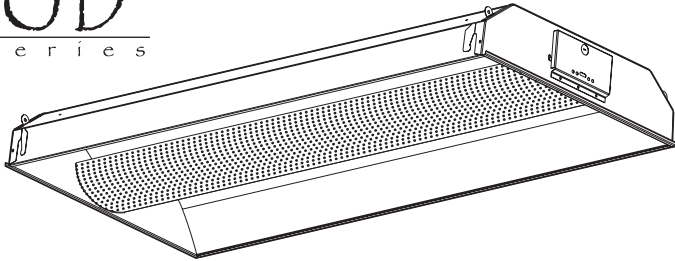

### PRODUCT FEATURES

- Twilite Series proprietary light lock system prevents light leakage at both ends of lamp shields.
- Lamp shields pivot down for easy installation of lamps and hassle free maintenance.
- Soft white paint maximizes distribution and provides visual comfort.
- Supplied standard with Advance or Universal ballast.
- Lamp shield is 60% perforated white steel mesh, backed with white acrylic diffuser for optimum light efficiency, maximum glare control and prevents lamp image.
- Constructed of one-piece ribbed unitized housing and corners that interlock to prevent aesthetical damage to fixture.
- All sides and corners are turned in and hemmed removing sharp edges for safe handling and installation.
- Built-in earthquake tabs.
- Four corner tie points are standard for safety wire support when required.
- Ballast enclosure precisely engineered to be behind lamp shield and enhance light distribution.
- Construction of lamp shield conceals lamps and ballast access cover.
- Captive-bolt ballast mounting allows front access to ballast.
- NEC required ballast disconnect is standard.
- Same day shipping on most options.

### LISTING

- UL/ C -UL listed to US and Canadian standards.

### WARRANTY

- Guaranteed for one year against mechanical defects.



### ORDERING INFORMATION ( Example: 24-OD-3-32-T8 )

<b>SERIES</b> OD-Oracle Direct/Indirect	<b># LAMPS/LAMP TYPE</b> 1-32-T8 (1 lamp/32W/T8) 2-32-T8 (2 lamps/32W/T8) 3-32-T8 (3 lamps/32W/T8) 1-28-T5 (1 lamp/28W/T5) 2-28-T5 (2 lamps/28W/T5) 3-28-T5 (3 lamps/28W/T5) 1-54-T5HO (1 lamp/54W/T5HO) <sup>2</sup> 2-54-T5HO (2 lamps/54W/T5HO) <sup>2</sup> <i>(For other lamp type, please consult factory)</i>	<b>BALLAST</b> (Blank) -1 Ballast 2 -2 Ballasts <sup>3</sup>  <b>*MASTER/SATELLITE</b> MAS1-Master fixture shipped w/ 1 ballast & 11 ft. flex MAS2-Master fixture shipped w/ 2 ballast & 11 ft. flex SAT-Satellite fixture shipped w/o ballast <i>*must be ordered separately</i> EX: 24-OD-2-32-T8-MAS2 and 24-OD-2-32-T8-SAT
<b>FIXTURE SIZE</b> 24 - 2' X 4'		
<b>TRIM TYPE</b> (Blank)-Grid		

BALLAST TYPE/LAMP COMPATIBILITY				
ORDER CODE	32W/T8	28W/T5	54W/T5HO	DESCRIPTION
(Blank)	●	●		≤ =10% THD, Instant Start
EPS	●	●	●	≤ =10% THD, Programmed Start
ADV-ROVR	●		●	Advance ROVR (3% Dimming, Digital) <sup>1</sup>
ADV-7	●		●	Advance Mark 7 (0-10v, 5% Dimming) <sup>1</sup>
ADV-10	●		●	Advance Mark 10 PS (5% Dimming) <sup>1</sup>
ADV-OPT		●		Advance OPT Step Dimming <sup>1</sup>
Lut-D (H3D)	●	●		Lutron Hi-Lume 3D (1% Dimming, 3-wire & Digital) <sup>1</sup>
Lut-H (FDB)	●		●	Lutron Hi-Lume (1% Dimming, 3-wire) <sup>1</sup>
Lut-E10 (ECO)	●	●	●	Lutron Eco-10 (10% Dimming, 3-wire) <sup>1</sup>
Lut-T (2W)	●		●	Lutron Tu-Wire (5% Dimming, 2-wire) <sup>1</sup>
Lut-E (EC5)	●	●	●	Lutron EcoSyst em (10% Dimming, 3-wire) <sup>1</sup>

- Notes:**
1. Voltage must be specified for dimming ballast.
  2. T5HO fixtures come with programmed start ballast standard.
  3. Available for 2 or more lamp fixtures only.

<b>VOLTAGE</b> (Blank) - MVOLT (120/277) 120 277 347	<b>LAMPS INSTALLED</b> (Blank) - No lamps installed L30K - 3000K lamps installed L35K - 3500K lamps installed L41K - 4100K lamps installed L50K - 5000K lamps installed
--	--

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T5-520	Up to 520 L. for T5
EMG-T5-T5HO-700	Up to 700 L. for T5 or T5HO
EMG-T5-T5HO-1300	Up to 1300 L. for T5 or T5HO
EMG-T8-BX-T5-T5HO-3200	Up to 3200 L. for T8, BX, T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO

MANY OTHER BODINE AND IOTA EMERGENCY PACKS ARE AVAILABLE, PLEASE CONSULT FACTORY. VISIT WWW.BODINE.COM OR WWW.IOTAENGINEERING.COM FOR MORE DETAILS.

### OTHER OPTIONS

- FK24 - Flange Kit for 2' X 4' Fixture
- C3 - 6' 3-wire Flex Cable (Single Circuit)
- C4 - 6' 4-wire Flex Cable (Double Circuit)
- FBF - Internal Fast Blow Fuse
- SBF - Internal Slow-Blow Fuse
- RIS - Radio Interference Suppressor
- USA - Made in America Compliance
- DCR - Dust Cover

Please consult factory regarding sensor or daylight harvesting options.