

WARNING: Disconnect main power at the source prior to installation! *Only qualified electricians should install Alcon Lighting products.*

Driver must be accessible after installation. For suspended and hard lid ceilings with access panels. Canopy mounts to mud ring attached to J-box.


Standard pendant length: 8 ft. Specify **XP** for extra pendant.
Maximum canopy to fixture distance: 25 ft. Maximum canopy to driver distance: 100 ft. (with 10 AWG wire).

NOTE: Multiple drivers must be mounted no less than 4 inches apart side-by-side, and 1 inch apart end-to-end, to avoid overheating.




Remote Driver Canopy 3.8
x 0.45 in.

MR – Multiple mount driver installation.




CR – Centered mount remote driver installation.

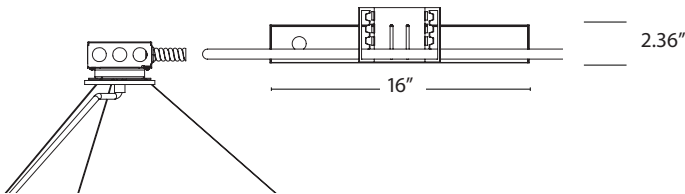


EMM or EMC – Multiple or Centered Emergency. *T-bar install shown, below.*

Emergency battery pack provides 7W for 90 minutes. (12W also available.) Remote install only. Red driver light and test switch mounted in handy box installed at ceiling.

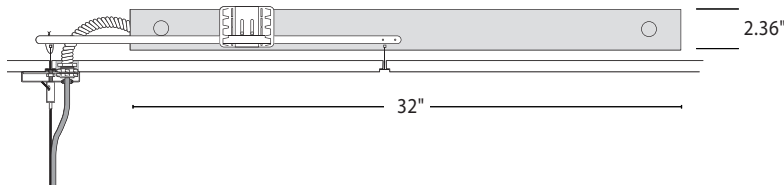

CP DISTRIBUTION

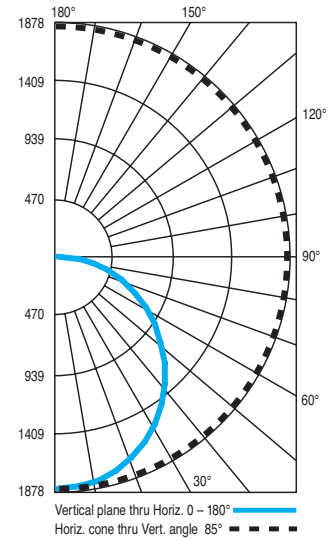

COEFFICIENTS

	% CEILING 80 (20% FLOOR)		
	% WALL 70	50	30
0	119	119	119
1	108	103	98
2	98	89	82
3	89	78	70
4	82	69	60
5	75	62	53
6	69	56	47
7	64	50	42
8	60	46	37
9	56	42	34
10	52	39	31

NOTES

5-59W

59W LEDs, 3500°K
Delivered lumens:
5,400

CRI: 90
R9 ≥ 72

WATTS / LUMENS

Diameter	Watts	Total Lumens	Delivered Lumens
2'	23	4,100	2,166
3'	35	6,100	3,250
4'	47	8,150	4,333
5'	59	10,200	5,416
6'	71	12,500	6,400