

⚠ ALWAYS TURN OFF MAIN POWER AND READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER PROCEDURE MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN.

When installing or using this luminaire, basic safety precautions should always be followed, including the following:
For use with Alcon Lighting Model 13000 track system.

- Do not install this luminaire in wet locations.
- Do not install any part of this track system fewer than 5 feet above the floor.
- Do not install any luminaire assembly closer than 6 inches to curtains or similar combustible materials.
- Disconnect the electrical power before modifying or adding to the track configuration.
- Do not attempt to energize anything other than lighting track luminaires on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, or similar devices to the track.


SAVE THESE INSTRUCTIONS

CHANGING COLOR TEMPERATURE AND BEAM ANGLE

Select color temperature prior to installation. Color temperature switch is located on the back of the track head.





Note: Track heads are preset at 3000K and 50° Beam Spread

1. Before installation, set the track heads to desired color temperature and beam spread.
2. Slide the color temperature switch to the desired CCT (2700K / 3000K / 3500K / 4000K / 5000K)
3. Twist the ring located on the cylinder to adjust the beam spread between 20° to 50°.

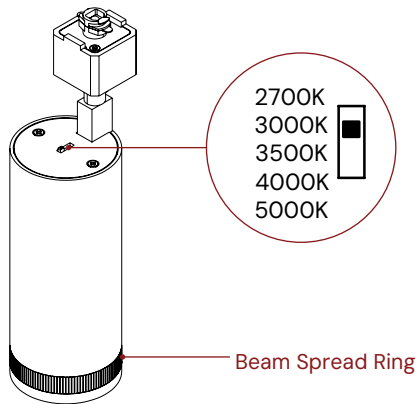

INSTALLATION STEPS

1. Turn off supply mains before starting installation.
Skip to Step 3 if installing onto a single circuit track.
2. To install into a two circuit track, raise the circuit contact on the track head adapter by using a flat head screwdriver to lift up the contact point. (Figure 1)
3. Align the adapter and insert track head contacts parallel with the track circuit. Twist the track head adapter 90° to set the latch onto the track. (Figure 2)

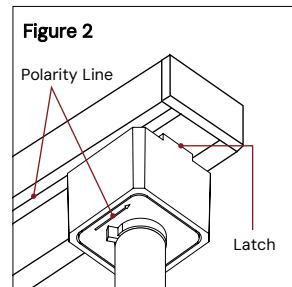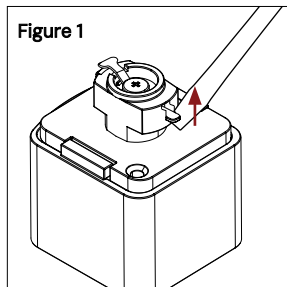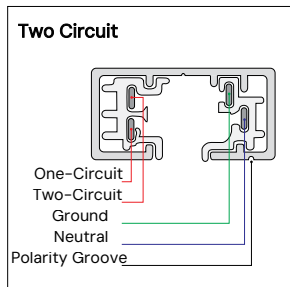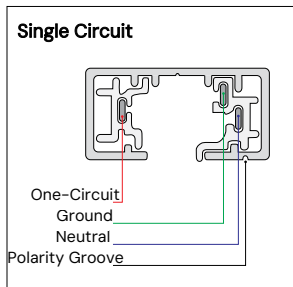



ALWAYS TURN OFF MAIN POWER AND READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER PROCEDURE MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN.





When installing or using this luminaire, basic safety precautions should always be followed, including the following:
For use with Alcon Lighting Juno track system.

- Do not install this luminaire in wet locations.
- Do not install any part of this track system fewer than 5 feet above the floor.
- Do not install any luminaire assembly closer than 6 inches to curtains or similar combustible materials.
- Disconnect the electrical power before modifying or adding to the track configuration.
- Do not attempt to energize anything other than lighting track luminaires on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, or similar devices to the track.

SAVE THESE INSTRUCTIONS

INSTALLATION STEPS

1. Turn off supply mains before starting installation.
Skip to Step 3 if installing onto a single circuit track.
2. To install into a two circuit track, raise the circuit contact, marked "P", on the track head adapter by using a flat head screwdriver to lift up the contact point.
3. Position the locking lever on the same side as the track's polarity line.
4. Align and insert track head contacts parallel with the track circuit. Rotate the track head adapter 90° to set the locking lever onto the track.
Note: The polarity indicating arrows should be pointing to the polarity lines for a two circuit track.
5. To remove track head, press downward on the locking lever. Rotate the track head 90° to release the track head.

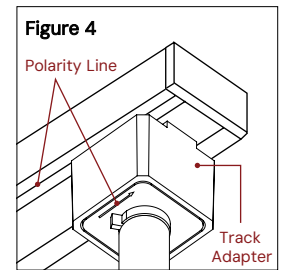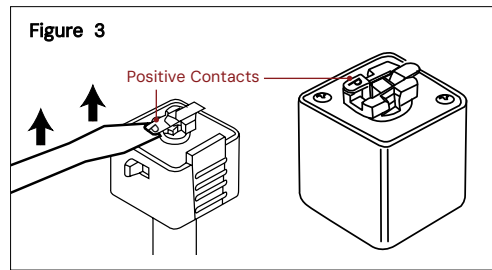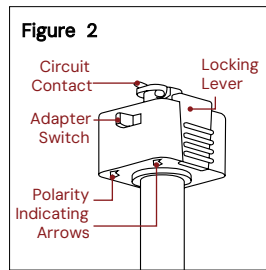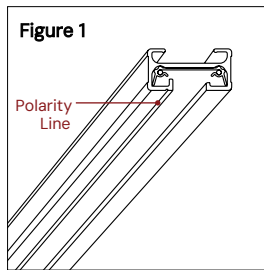



ALWAYS TURN OFF MAIN POWER AND READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER PROCEDURE MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN.

When installing or using this luminaire, basic safety precautions should always be followed, including the following:
For use with Alcon Lighting Lightolier track system.

- Do not install this luminaire in wet locations.
- Do not install any part of this track system fewer than 5 feet above the floor.
- Do not install any luminaire assembly closer than 6 inches to curtains or similar combustible materials.
- Disconnect the electrical power before modifying or adding to the track configuration.
- Do not attempt to energize anything other than lighting track luminaires on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, or similar devices to the track.

SAVE THESE INSTRUCTIONS

INSTALLATION STEPS

1. Turn off supply mains before starting installation.
Skip to Step 3 if installing onto a single circuit track.
2. To install into a two circuit track, raise the circuit contact on the track head adapter by using a flat head screwdriver to lift up the contact point. (Figure 1)
3. Position the locking lever on the same side as the track's polarity line. (Figure 2)
4. Align and insert track head contacts parallel with the track circuit. Rotate the track head adapter 90° (Figure 3) to set the locking lever onto the track. (Figure 4)
5. To remove track head, press downward on the locking lever. Rotate the track head 90° to release the track head.

