








READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER INSTALLATION MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. DO NOT COVER THE FIXTURE WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.

PARTS LIST

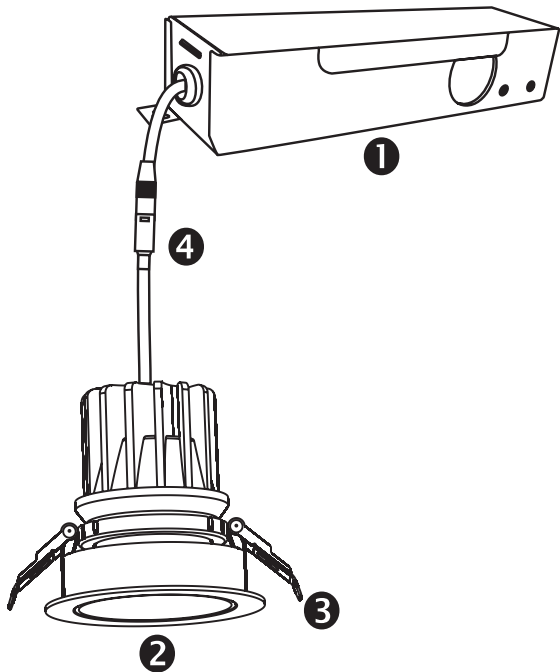

- 1 Junction box
- 2 Modular Downlight / Trim Downlight
- 3 Spring clips
- 4 Connector

Modular Model	Trim Model	Dimensions (DXL)	Specification	Power	Voltage	Cutout Size	Equivalent to	Application
 Round		Ø3-1/8"X3-3/4"						
		Ø3-1/4"X3-1/4"	3" Trim Round LED Downlight	7W	120V AC / Triac Dimmable	Ø3"	75W Halogen	IC Rated
		Ø3-1/8"X3-3/4"						

MAINTENANCE

- Do not modify this fixture. Any modifications may render the product unsafe and avoid warranty.
- This product is suitable for damp locations.



READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER INSTALLATION MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. DO NOT COVER THE FIXTURE WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.

INSTALLATION STEPS




WARNING

Turn power OFF from electrical panel before installation or maintenance.

1. **Turn power OFF** from the electrical panel prior to installation.
2. **Determine the location for installation** and cut ceiling hole in accordance with cut-hole dimensions. Refer to Hole Diameter table for appropriate sizes. **(Fig. 1)**
3. **Open the junction box cover** and remove the appropriate knockout(s) on the side panel. **(Fig. 2)**
4. **Insert the electrical supply cable** through the knockout and secure with a cable connector
5. **Using quick-connect push-in terminals**, connect the ground wire to the green wire terminal; black wire to black wire terminal; white wire to white wire terminal. **(Fig. 2)**
6. **Place all wiring and connections back in to the box and close the cover.** Connect the driver to the light panel.
7. **Insert junction box** through the mounting hole. **(Fig. 3)**
8. **Push spring-loaded clips on the fixture upwards and insert fixture base** in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling. **(Fig. 4)**

Fig. 1

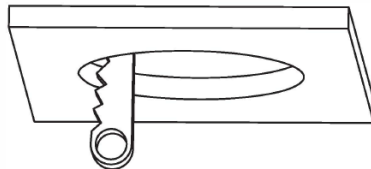

Hole diameter 3"



READ ALL INSTRUCTIONS BEFORE INSTALLATION. IMPROPER INSTALLATION MAY RESULT IN ELECTRIC SHOCK, SERIOUS INJURY, OR DEATH. DO NOT COVER THE FIXTURE WITH HEAT INSULATION GASKET OR SIMILAR MATERIALS.

Fig. 2

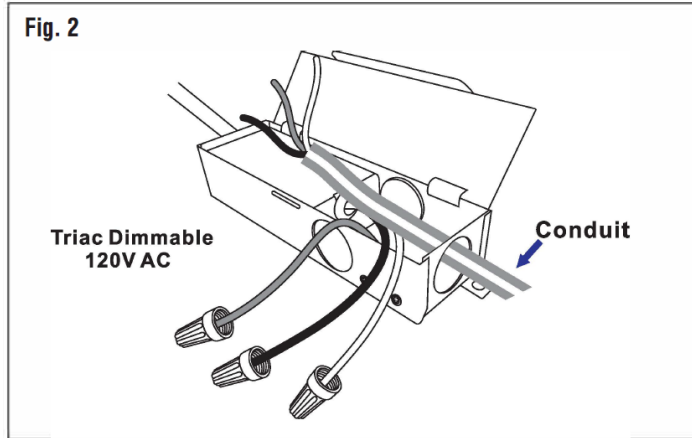


Fig. 3

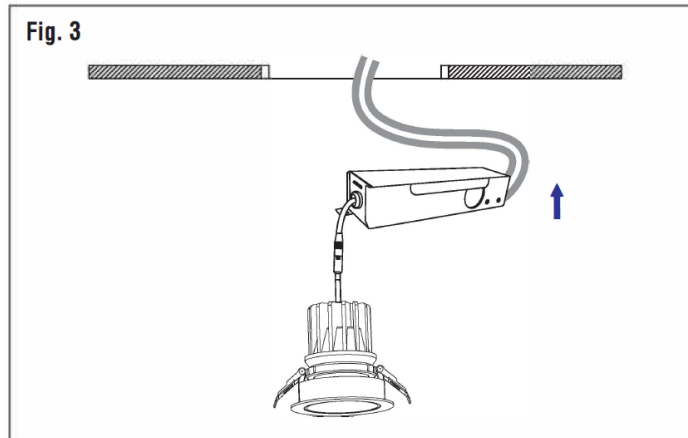


Fig. 4

