


Two keyholes and two additional knockouts on the back

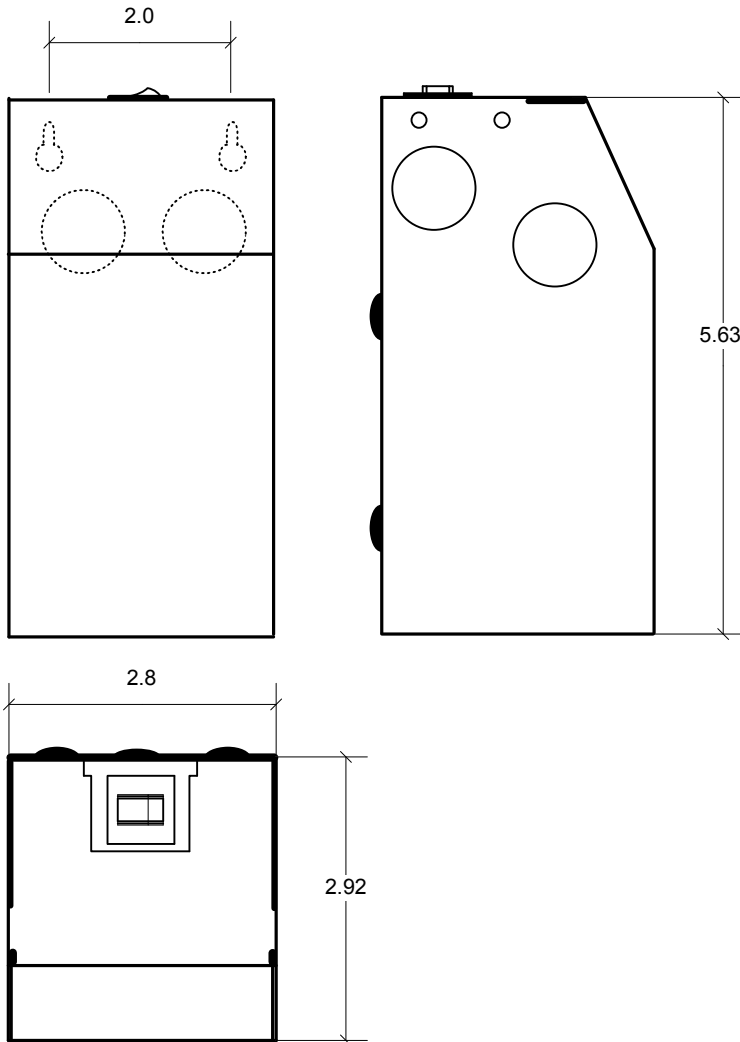

NOTES:

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.5A
3. Enclosure Temperature does not exceed 65°C in a 40°C ambient, fully loaded.
4. The actual transformer 100VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition. Dimmers for magnetic transformers are recommended
6. Input leads are 18 AWG output leads are 12 AWG. Lead insulation is 105°C.
7. The transformer uses a class B (130°C) insulation system.
8. The transformer has a manual reset thermal 7A circuit breaker on the secondary side.
9. Wiring compartment has 4 side and 2 back knockouts sized for 3/4 inch screw cable connectors.
10. The removable cover for the wiring compartment is secured in place by clips.
11. The enclosure is black powder coated.
12. The Transformer is UL listed. UL file number: E194005.
13. The label contains Technomagnet's catalog number and electrical rating.
14. The boost tap option is indicated by the marked check box on the label.

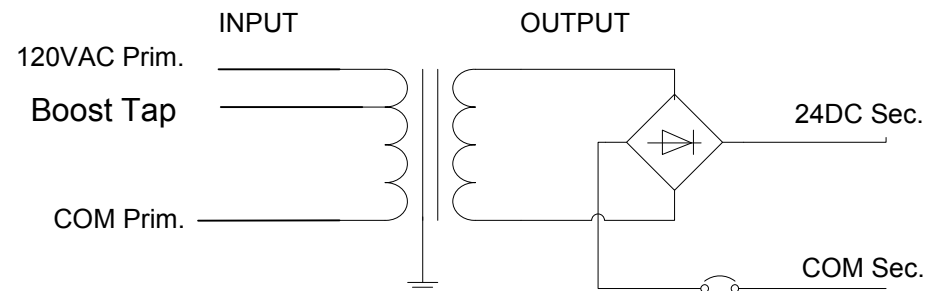


Table 1.

| Output Volts | |
|--------------|-------|
| 120AC | Boost |
| 23.5 | 25.6 |

| | | | |
|-------------------------|---|--|--|
| | | 15547 Cabrito Road Van Nuys, CA 91406 | |
| | | Interactive Lighting Servers | |
| Name Date | Page 1 Of 1 | Scale: no scale | |
| | | Tolerance: ± | |
| Title: | Compact indoor 24VDC 100VA Low voltage Transformer. | | |
| Part # TMC - 100S 24VDC | Rev. A | | |