


LED POWER SUPPLIES




PLUG-IN



HARDWIRE

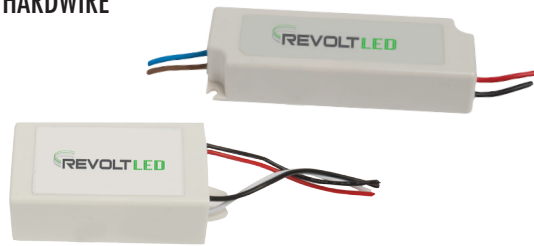

DIMMABLE STANDARD

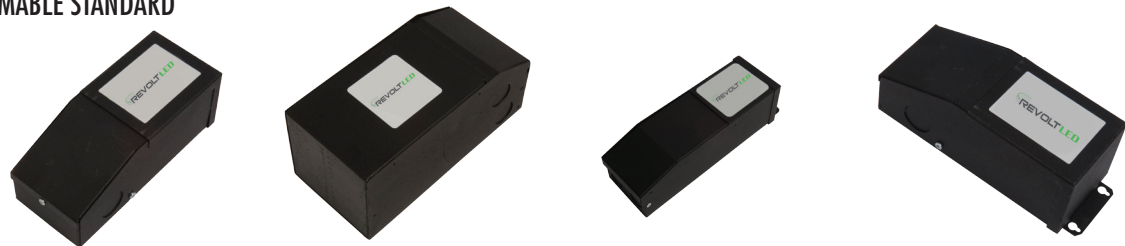

Technical Specifications

CAT. NO.	WATTAGE	VOLTAGE	LENGTH	WIDTH	DEPTH
PLUG-IN					
PS-12W	12W	12/24V DC	2.30"	1.63"	1.37"
PS-24W	24W	12/24V DC	3.75"	1.63"	1.50"
PS-45W	45W	12/24V DC	3.75"	1.63"	1.50"
PS-65W	65W	12/24V DC	4.72"	2.00"	1.25"

HARDWIRE					
PSHW-10W	10W	12/24V DC	2.55"	1.37"	0.90"
PSHW-20W	20W	12/24V DC	4.64"	1.38"	1.02"
PSHW-35W	35W	12/24V DC	5.83"	1.57"	1.18"
PSHW-60W	60W	12/24V DC	6.38"	1.65"	1.18"

DIMMABLE					
PSDM-20W	20W	12/24V DC	5.03"	2.14"	2.00"
PSDM-40W	40W	12/24V DC	5.03"	2.14"	2.00"
PSDM-60W	60W	12/24V DC	6.06"	2.09"	2.20"
PSDM-100W	100W	12/24V DC	7.56"	3.06"	2.94"
PSDM-150W	150W	12/24V DC	7.56"	3.06"	2.94"
PSDM-200W	200W	12/24V DC	8.00"	4.19"	3.37"
PSDM-300W	300W	12/24V DC	8.00"	4.19"	3.37"

MUST SPECIFY VOLTAGE WITH CATALOG NUMBER. EXAMPLE: PSDM-40W-24V




LED ECCO LINK LIGHTBAR



ECCO LINK LIGHTBAR



ACCESSORIES

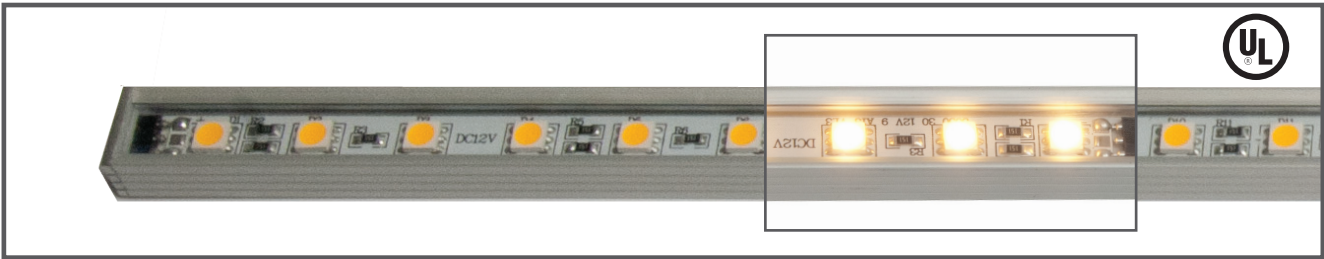

RevoltLED introduces our new LED Ecco Link Lightbar. The Ecco Link LED Bar is one of the brightest and most efficient LED linear systems out in the market. At 4.3 Watts per foot, the Ecco Link LED bar provides equal to 30 Watts of incandescent light per linear FT. This Low wattage LED system is a great alternative to halogen linear systems providing over 50,000 hours of light, with minimal heat. Up to 12 FT of Ecco link Lightbars can be joined together, while still using only one 24V power source. **RevoltLED** Lightbars are joined end-to-end using connectors for a seamless light source. Fully dimmable, this highly adaptable Lightbar fits great under shelving, cabinets, displays, accent lighting and more. Our adjustable mounting brackets are a great way to angle the LED bars, which is ideal for display cabinets and kitchen back splashes. UL listed.



ECCO LINK LIGHTBAR TECHNICAL SPECIFICATIONS


Now available in bronze housing. **NEW**

CAT. NO.	COLOR	LENGTH	VOLTAGE	WATTS	LUMENS	# OF LED
ELB4	WW/CW	4"	24V DC	1.4W	72	6
ELB8	WW/CW	8"	24V DC	2.8W	144	12
ELB12	WW/CW	12"	24V DC	4.3W	215	18
ELB24	WW/CW	24"	24V DC	8.6W	430	36
ELB36	WW/CW	36"	24V DC	12.9W	645	54
ELB48	WW/CW	48"	24V DC	17.2W	860	72

WW=Warm White , CW=Cool White

Ordering Example: Provide CAT NO+LED color. Example: ELB12-WW

Hardwire Cable



ELB-HWC-12 (12 inches)
ELB-HWC-24 (24 inches)
ELB-HWC-72 (72 inches)

DC Power Connector




ELB-PDC-8 (8 inches)
ELB-PDC-20 (20 inches)
ELB-PDC-72 (72 inches)

Link Extension Cable



ELB-LNK-2 (2 inches)
ELB-LNK-6 (6 inches)
ELB-LNK-12 (12 inches)
ELB-LNK-24 (24 inches)
ELB-LNK-48 (48 inches)
ELB-LNK-72 (72 inches)

SEAMLESS CONNECTOR



ELB-SMC
(ONE INTER-CONNECTOR INCLUDED WITH EVERY LIGHTBAR)

Flat Bracket



ELB-BKT
(ONE SET OF FLAT BRACKETS INCLUDED WITH EVERY LIGHTBAR)

Adjustable Bracket




ELB-BKT-ADJ

Switch In-Line



LSA-SWC

DC Power Splitter

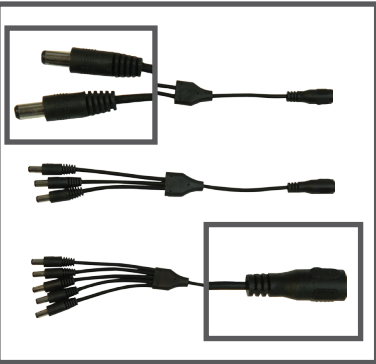

LSA-DCS-2 (2 WAY SPLITTER)
LSA-DCS-3 (3 WAY SPLITTER)
LSA-DCS-5 (5 WAY SPLITTER)

DC Male/Female



LSA-DCA-M (MALE)
LSA-DCA-F (FEMALE)

DC Power Cable



LSA-PWC-8FT (8' DC POWER CABLE)
LSA-PWC-30FT (30' DC POWER CABLE)

DC Extension Cable



LSA-DCE-40 (40" DC EXTENSION CABLE)
LSA-DCE-120 (120" DC EXTENSION CABLE)