

12235 INSTALLATION INSTRUCTIONS FOR MODERN ROUND CHANDELIER SLIM LED RING PENDANT LIGHT

Safety Precautions:

- This product should be installed, inspected, and maintained by a qualified electrician only, in accordance with the NEC (National Electric Code) and all local codes.
- Turn off electrical power before inspection, installation or removal. Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.
- This fixture is designed for use in a 120VAC / 60Hz circuit. This fixture is compatible with a TRIAC (forward-phase or leading-edge) / ELV (reverse-phase or trailing-edge) dimmer.
- Make sure that the power source conforms to the requirements of the fixture. (See labels on the fixture housing).
- To reduce the risk of electrical shock, and to assure proper operation, this fixture must be adequately grounded. To accomplish proper grounding, there must be a separate ground wire (green) contact between this fixture and the ground connection of your main power supply panel.
- This fixture is intended to be used for general indoor lighting in dry or damp locations.

Disclaimer:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules and Canadian ICES-005 (B) / NMB-005 (B). These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiver antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult with the dealer or an experienced radio/TV technician for help.

Any modifications to this fixture may void the warranty and interfere with the safe operation of the luminaire.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

12235 INSTALLATION INSTRUCTIONS FOR MODERN ROUND CHANDELIER SLIM LED RING PENDANT LIGHT

Step 1 – Preparing for installation

Caution:

Make sure power is off at fuse or circuit breaker box.

Check power wires for damage or scrapes. If power supply wires are within three inches of the LED driver, use wire suitable for at least 90°C (194°F).


Note:

Most dwellings built before 1985 have supply wire rated to 60°C. Consult a qualified electrician to ensure correct branch circuit conductor before installing.

A Disconnect electrical power at fuse or circuit breaker box before installing or servicing any part of this fixture and carefully remove the fixture from the carton, remove components from hardware kit.

B Remove mounting bracket (2) from the fixture (1) by removing two screws (4).

C Install mounting bracket (2) to the junction box (not included) using two screws (3) to secure it.

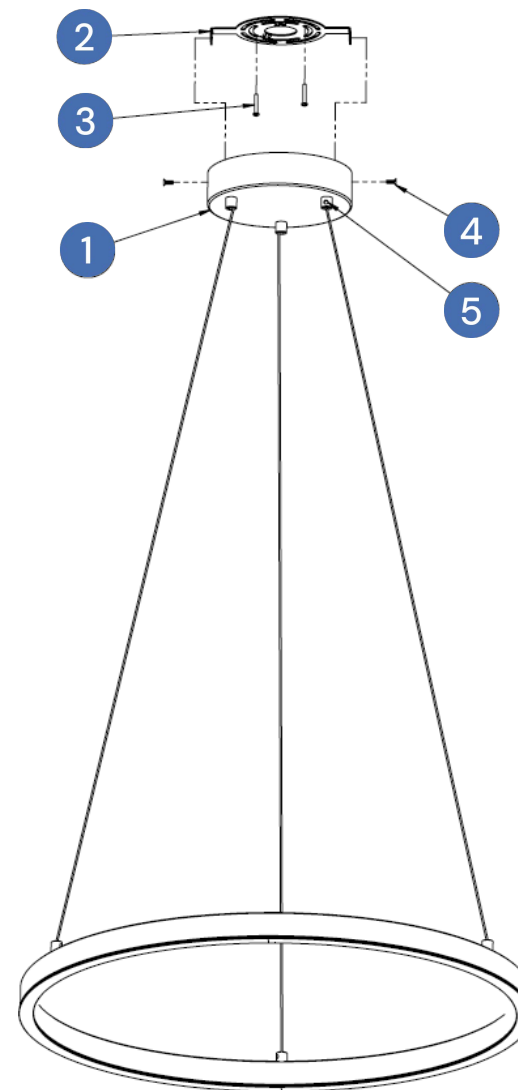

12235 INSTALLATION INSTRUCTIONS FOR MODERN ROUND CHANDELIER SLIM LED RING PENDANT LIGHT

Step 2 – Wiring fixture

- Make all wire connections to appropriate wire. Secure with wire nuts (provided).
- Connect the green wire from the fixture to the supply power source ground wire.
- **For none dimming fixture.** Connect the white wire from the fixture (AC) to the white (N) wire from supply power source. Connect the black wire from the fixture (AC) to the black (L) wire from supply power source.
- **For TRIAC dimming.** Connect the white wire from the fixture (AC) to corresponding neutral (N) wire in accordance with the dimmer manufacturer instructions. Connect the black wire (AC) from the fixture to the corresponding control line (L) wire in accordance with the dimmer manufacturer instructions.
- **Do not mix wires.** Pull on each wire lead to make sure connections are secure. Make certain no bare wires are exposed outside of wire connectors. Tuck all connections neatly into the junction box.

Step 3 – Adjusting cord length (optional)

Loosen the strain relief screws (5) on the bottom of the canopy and pull the excess cord through the top of the canopy. Re-tighten strain relief screws (5) when the cord is at desired height. Repeat on other cords until fixture is level. Fixture is provided with 108" adjustable cords. Note: Excess cords can be stored inside the canopy.

Step 4 – Mounting

Install the fixture (1) over the mounting bracket (2) by aligning side holes together then using two screws (4) to secure it.

12235 INSTALLATION INSTRUCTIONS FOR MODERN ROUND CHANDELIER SLIM LED RING PENDANT LIGHT

TOOL(S) NEEDED:

Option 1) Cordless drill and an elbow or L-shape adapter with Philips Insert Bit extension.



Option 2) Flexible Screwdriver with Philips Insert Bit.

