

Project Name:

Type: Quant

INTENDED USE

The Disk Architectural LED Surface Mount Down Light features an unobtrusive low profile design with low glare. The Disk is an ideal option for commercial and residential interior places.

FEATURES

Construction: 1" Super Slim Thick Die-Cast Aluminum Frame for Low to Medium Height Ceilings Integral Heat Sink Design for Maximum Heat Rejection

Mounting: for Retrofit, New Construction, and Remodel Applications. Universal Mounting Hardware for All Standard Octagonal Electrical Junction Boxes

Lens: Polycarbonate Frosted White

Voltage: 120V AC

Dimming: ELV down to 5% and 0-10V (120V/277V) with external 2-1/8" by 7/8" Driver

CRI: 90+


Operating Temperature: Suitable for Temperatures Down to -4°F (-20°C)

Life: 50,000 Hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results **Warranty:** 3 Years Carefree for Parts & Components (Labor Not Included)

Listings: ETL/CETL Listed, Suitable for Wet Location Installations, ADA compliant, California Title 24/JA8 Compliant, Assembled in the USA





ORDERING INFORMATION Example:

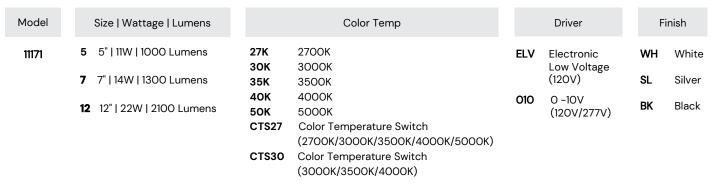

Quantity:







	Dimensions		
	11171-5	11171-7	11171-12
X1	5"	7"	11"
X2	6-1/8"	8-1/8"	12"