



FIXTURE SPECIFICATIONS

INTENDED USE

The **Pavo LED Architectural Wall Mount Down Light** is a versatile low glare lighting fixture that can be used indoor and outdoor, up or down, in commercial or retail settings. The Pavo is used to accent and create dramatic effects while providing a great source of lighting from above.

FEATURES

- Construction:** Round One Piece High Grade Aluminum Extrusion with Die Cast Aluminum Top Plate
Tamper Resistant
- Adjustable Option:** 25° Tilt
- Light Engine:** LED Chip-On-Board
- Lens:** Round One Piece Extruded Aluminum with Powder Coat Finish, Clear, Tempered Glass and Silicone O-Ring
- Reflector:** Glare-Free, One piece, Heavy Gauge Aluminum
- Mounting:** Includes Bracket for Installation Directly to a 3-1/2" or 4" octagonal electrical junction-box
- Voltage:** 120 (120-277 Available for Dimming)
- CRI:** 84+
- Dimming:** Universal Dimming System Compatitble with Most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V Fluorescent Dimmers
- Life:** L70 - 50,000 Hours
- Emergency:** 90 Minutes Minimum
Remote Test Switch, Plate Cover, Junction Box Included
- Listing:** ETL/cETL Listed
Suitable for Wet Location




ORDERING INFORMATION Example: (11218-DIR-15W-WF60-UNI-40K-WH-EM)


| Model | Lumen Output | Beam Spread | Dimming | Color Temperature | Finish | Options |
|--|--|--|---|---|--|---|
| 11218 Pavo-Round (Direct or Adjustable) View Pavo Direct View Pavo Adjustable | DIRECT DOWN LIGHT DIR-15W 15 watts 1000 lms DIR-22W15 22 watts 1500 lms DIR-22W22 22 watts 2200 lms DIR-30W 30 watts 2600 lms | <i>1-Direction</i> / <i>2-Direction</i> WF60 60° Wide Flood NF24 24° Narrow Flood FL45 45° Flood PE2^{2.5} 2° Pencil NS10² 10° Narrow Spot SP20 20° Spot IV² Type IV (Forward Throw) | ND Non-Dimming (120V) UNI Universal (Triac / ELV / 0-10V) | 17K^{3,4} 1700K 25K^{3,4} 2500K 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K³ 5000K 56K^{3,4} 5600K 27C³ 2700K (97 CRI) 30C³ 3000K (97 CRI) TF⁵ 590nm Amber View Product | WH White BK Black BR³ Bronze SL³ Silver | EM Emergency DS Daylight Sensor FR² Frosted Lens HXC² Black Hexcell Louver JB1 Integral Junction Box (1-Outlet) JB2 Integral Junction Box (2-Outlet) |
| 11219 Pavo-Round (2-Direction) View Product | 2-DIRECTION 2D-30W 30 watts 2000 lms 2D-45W30 45 watts 3000 lms | | | | | |
| 11221 Pavo-Square (2-Direction) View Product | 2D-45W44 45 watts 4400 lms 2D-64W 64 watts 5200 lms | | | | | |
| 11220 Pavo-Square (Direct) View Product | ADJUSTABLE ADJ-15W¹ 9 watts 1500 lms | | | | | |

¹Not Available for Square Models.
²Not Available for Adjustable Models.
³Special Order. Minimum lead time may apply.
⁴Minimum Order Required (25).
⁵Not Available for 2-Direction.
⁶Only Available for 11220 Pavo-Square

Round - Direct

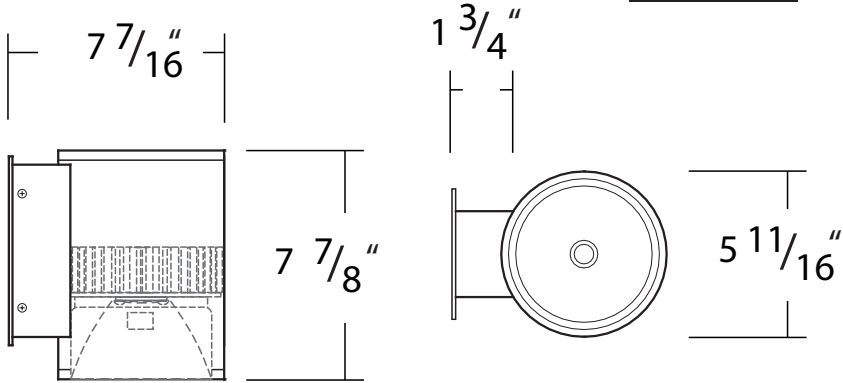

Round - Adjustable

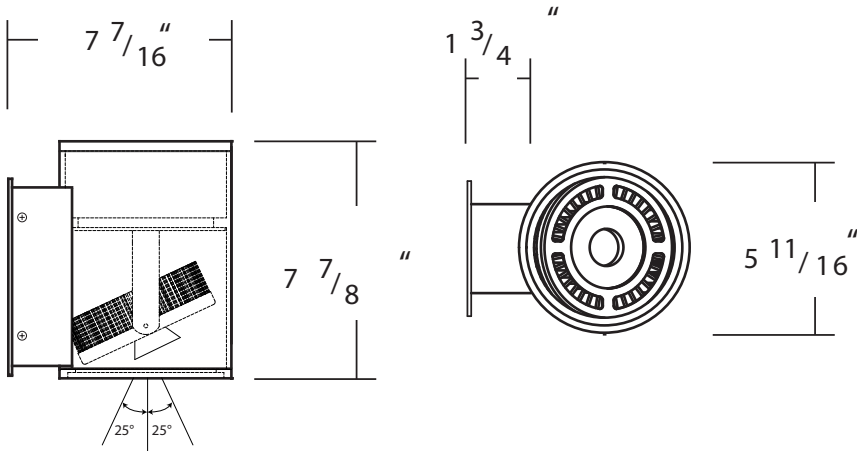

Square - Direct

