


23-Recessed Installation Instructions

Overview

WARNINGS

- This product must be installed in accordance with all applicable codes by a person familiar with the product.
- Each fixture must be **properly supported** during install.
- **DO NOT** join fixtures on the floor prior to lifting, or damage will occur.

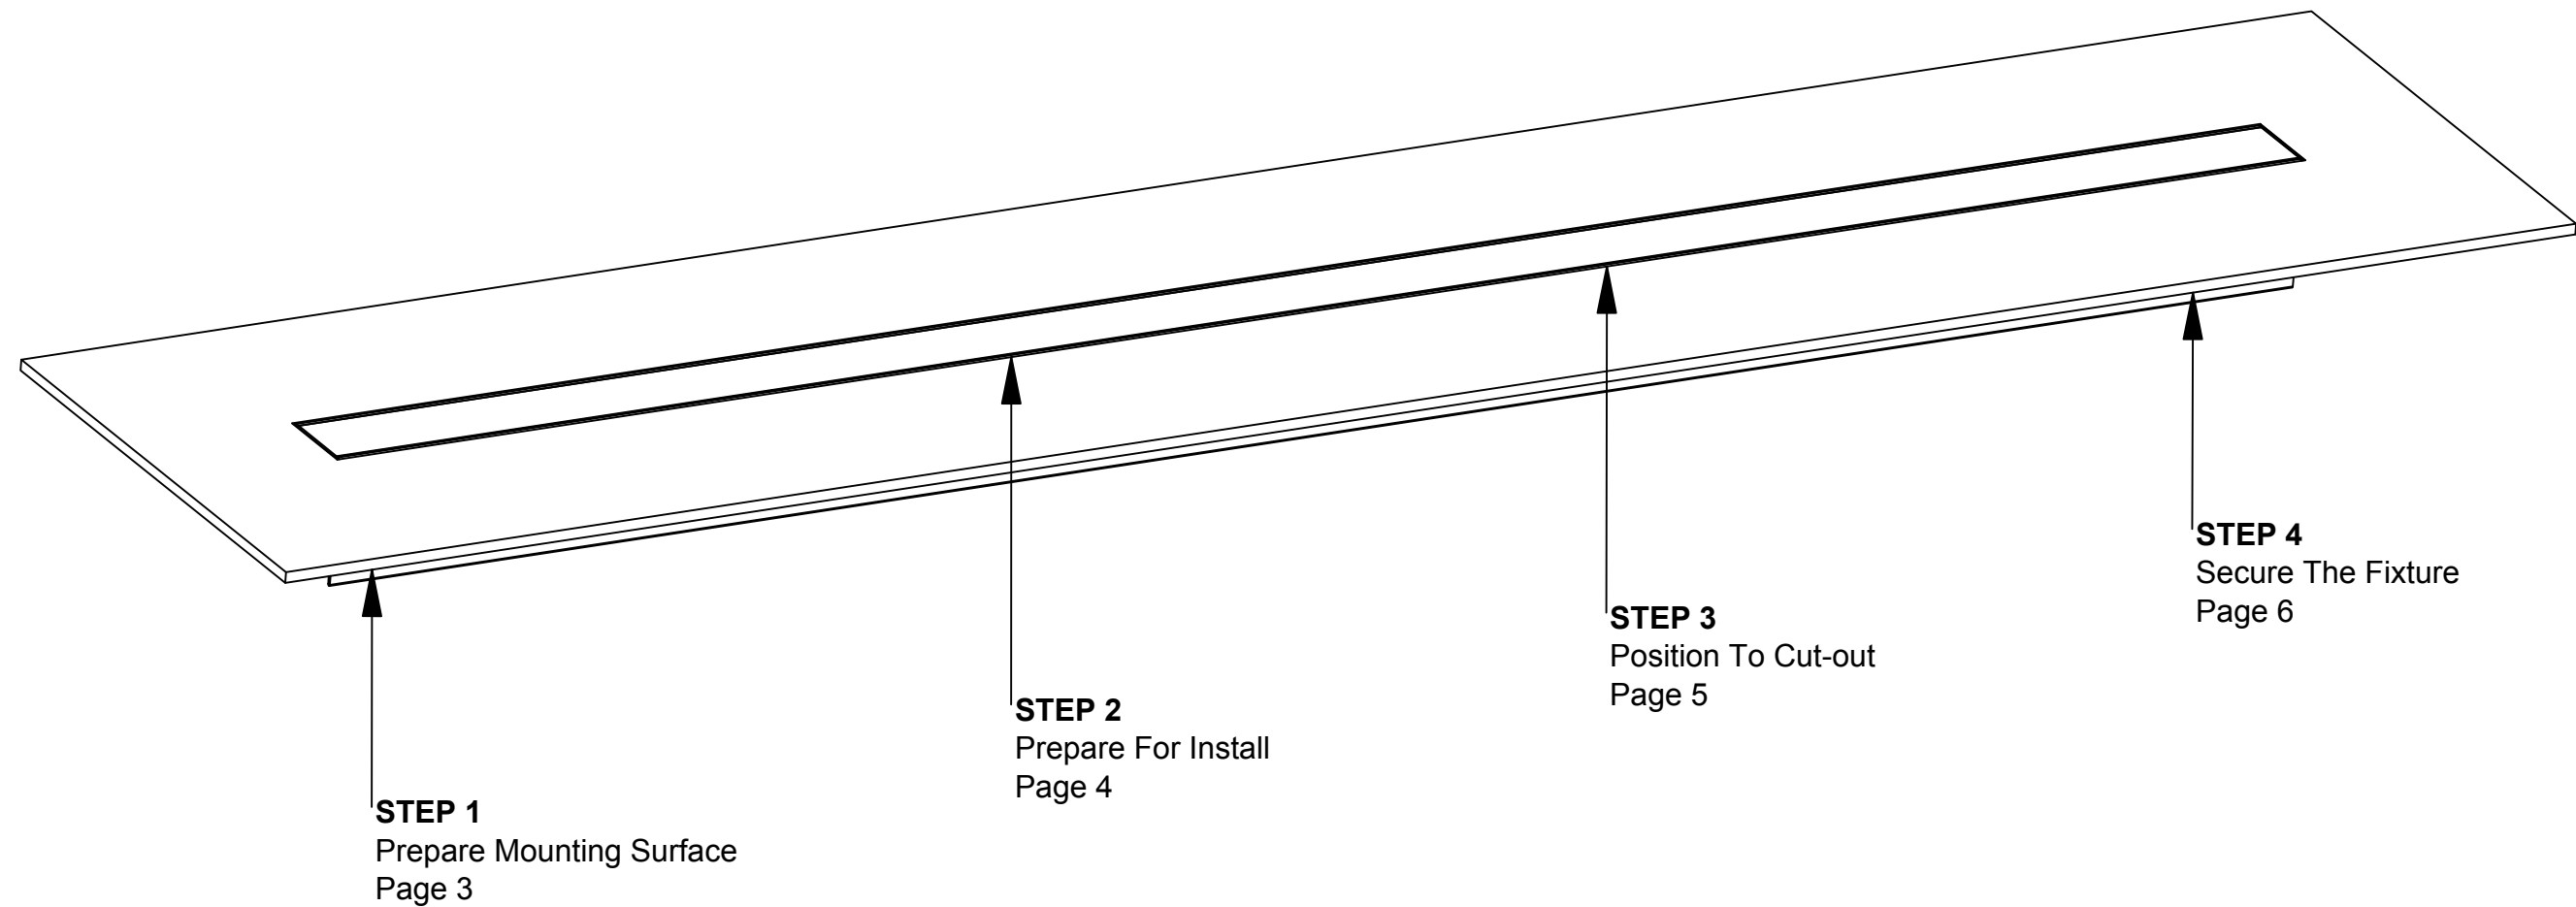

23-Recessed Installation Instructions

Preparation - Tools/Parts Identification



A. Identify Fixtures


Alcon Lighting LED

PART# 23RRSFXXLTXXWXXXXLDMVXXKWH


VOLTAGE: 120-277, 50/60HZ	CCT: XXXX
WATTAGE: XX MAX	DATE CODE: XX/XX/XX
FLUX: XXXX LUMENS	TYPE: XX

- Use labels found on the box and inside fixture bodies to identify bodies.
- **NOTE:** Locations of labels can vary.
- Remove all fixtures from their boxes.
- Organize fixtures based on their labels at the install location.

B. Tools Needed

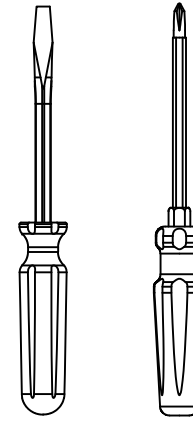


Screwdrivers

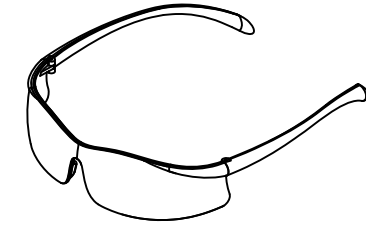

Safety Glasses




Utility Knife

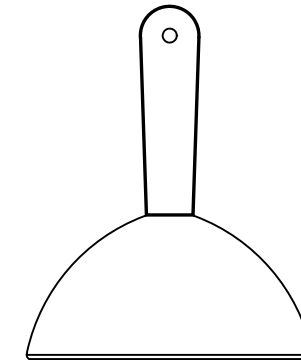

Mud Knife

- Always use proper safety equipment when installing fixtures.
- Tools shown are recommended for standard install. Tools needed may vary based on actual install location conditions.

C. Identify Parts





23-Recessed Fixture
(Provided)

23-Recessed Installation Instructions

Step 1 - Prepare Mounting Surface



A. Transfer Measurements

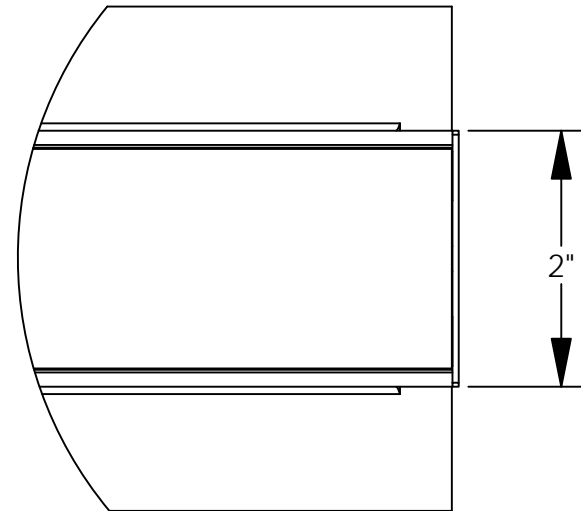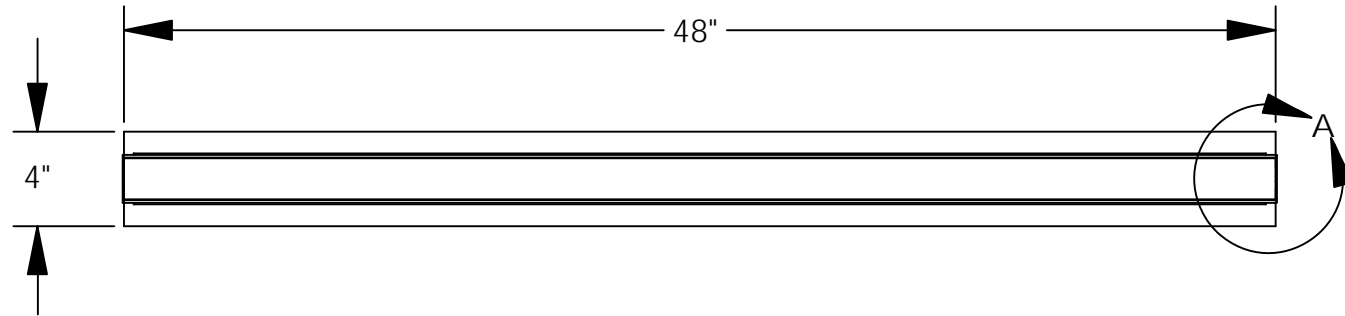


DETAIL A
SCALE 1 : 1.5

**Note: 4FT fixture shown,
fixture length may vary.**

- Note the length and width dimensions of the fixture, including the pre-installed flange.
- Transfer the dimensions to the grid. Set the grid rails to the proper width.

B. Make Cut-Out

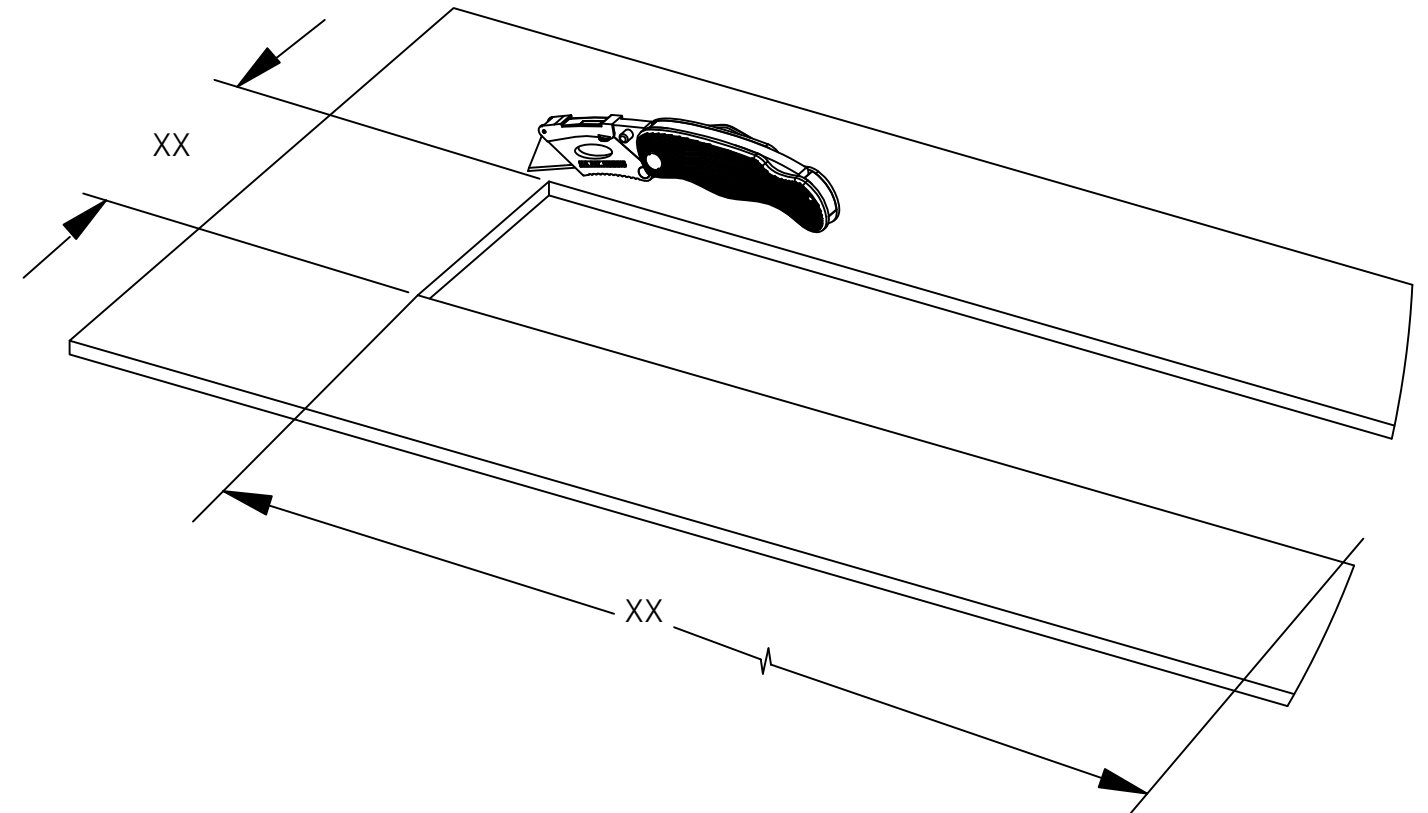

- Using a utility knife or similar, cut out an opening for the fixture in the mounting surface.
- **Note:** Keep the cut out size as small and tight to the fixture as possible.

Items Used In This Step




Utility Knife

23-Recessed Installation Instructions


Step 2 - Prepare The Fixture

A. Remove The Lens

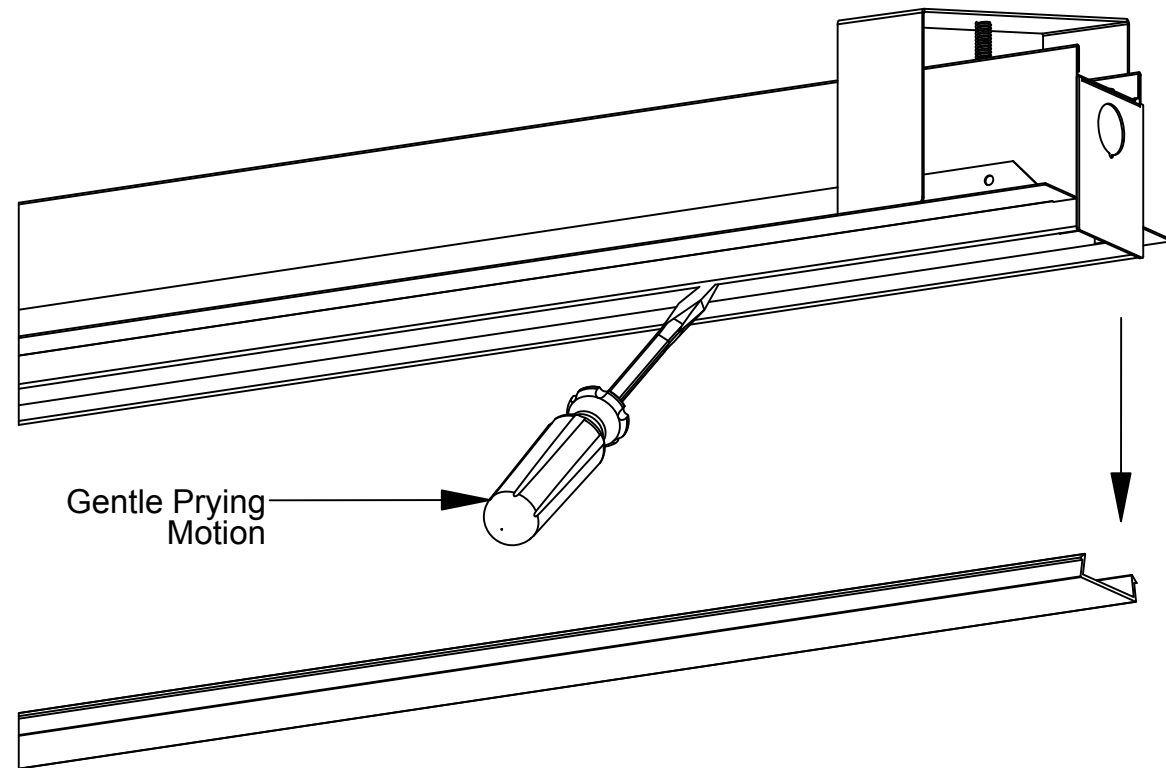


- Carefully insert a flat-head screwdriver, and use a gentle prying motion to remove lens.

Items Used In This Step




Flat Tip Screwdriver



Phillips Screwdriver

B. Position Brackets

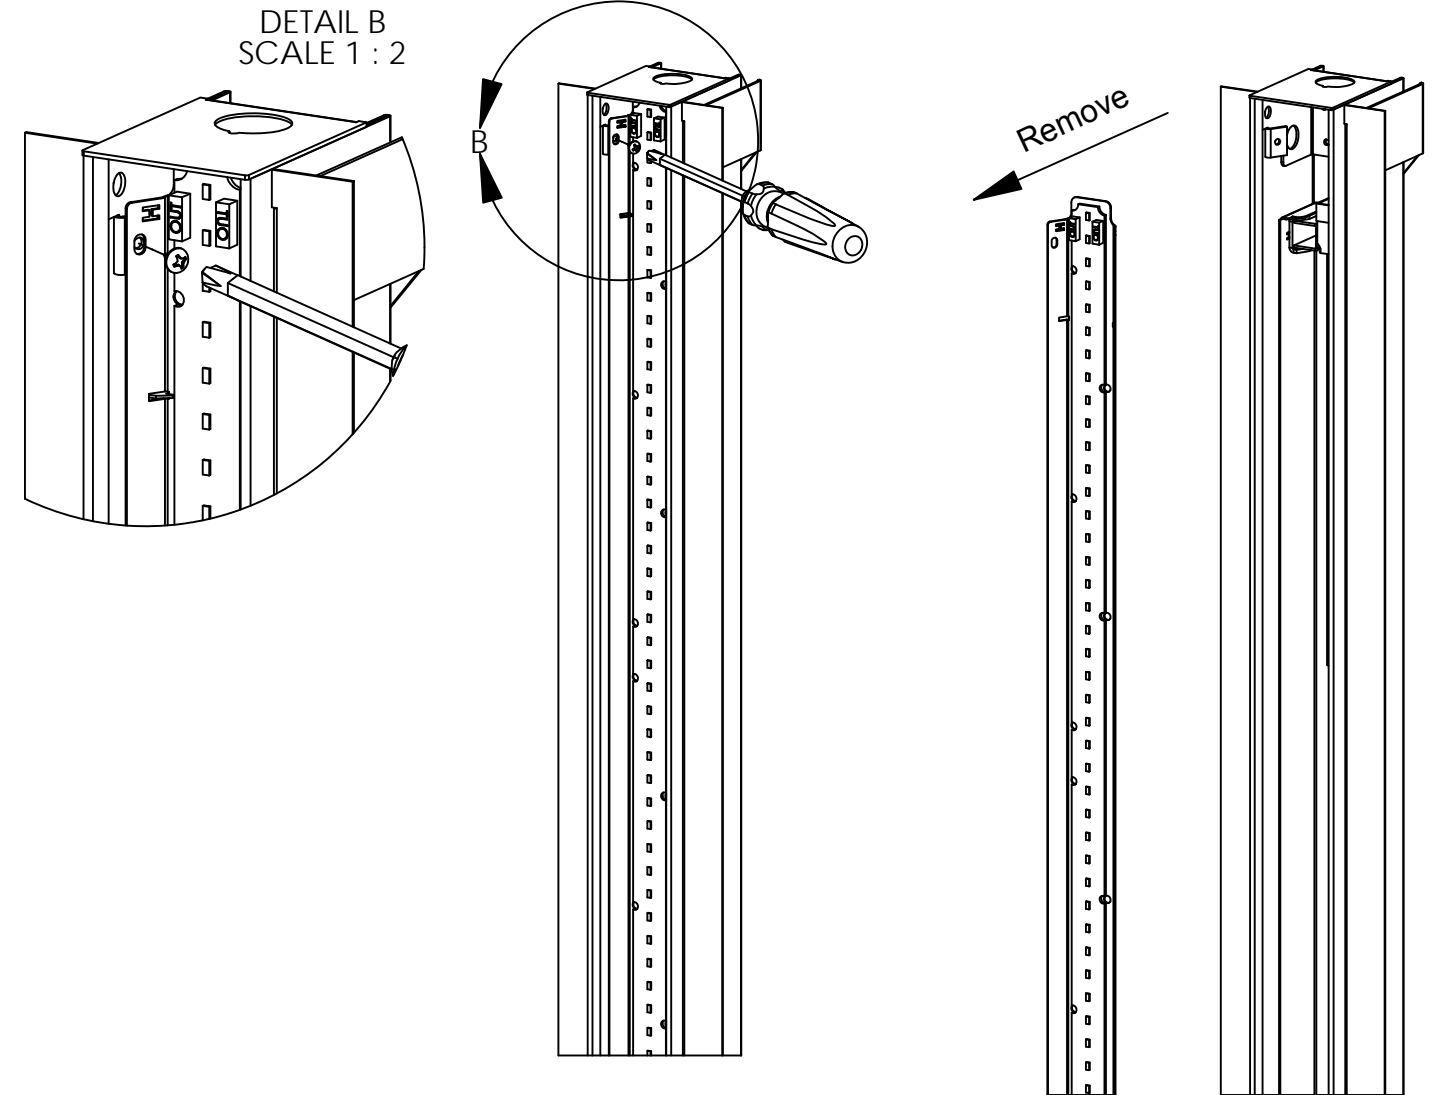

- Using a phillips screwdriver, remove the #8-32 X .25" screws as shown above. Set aside.
- **Note:** Set the screws aside in a safe place. They will be used in a later step.
- Remove the gear tray from the pan as shown, and set aside in a safe place.




23-Recessed Installation Instructions

Step 3 - Install The Fixture

A. Connect Power Cord

WIRING LEGEND		
Black	Hot	Line Voltage
White	Neutral	Line Voltage
Green	Ground	
Gray	Dimming	0-10V DC
Violet	Dimming	0-10V DC

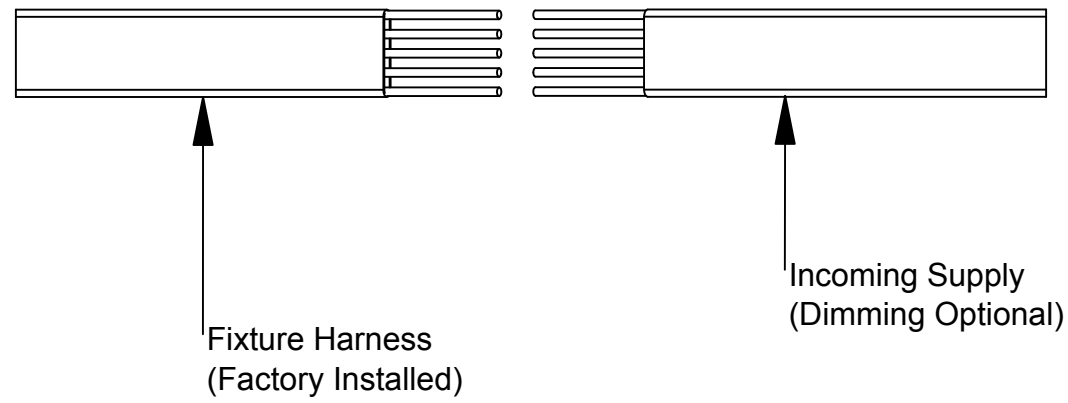


- Wire the fixture to the incoming supply. Refer to the wiring legend above as needed.
- **Note:** Use UL approved connectors only. Follow all local, state and national codes.

Items Used In This Step

(No Special Items Used)



B. Position Fixture In Cut-Out

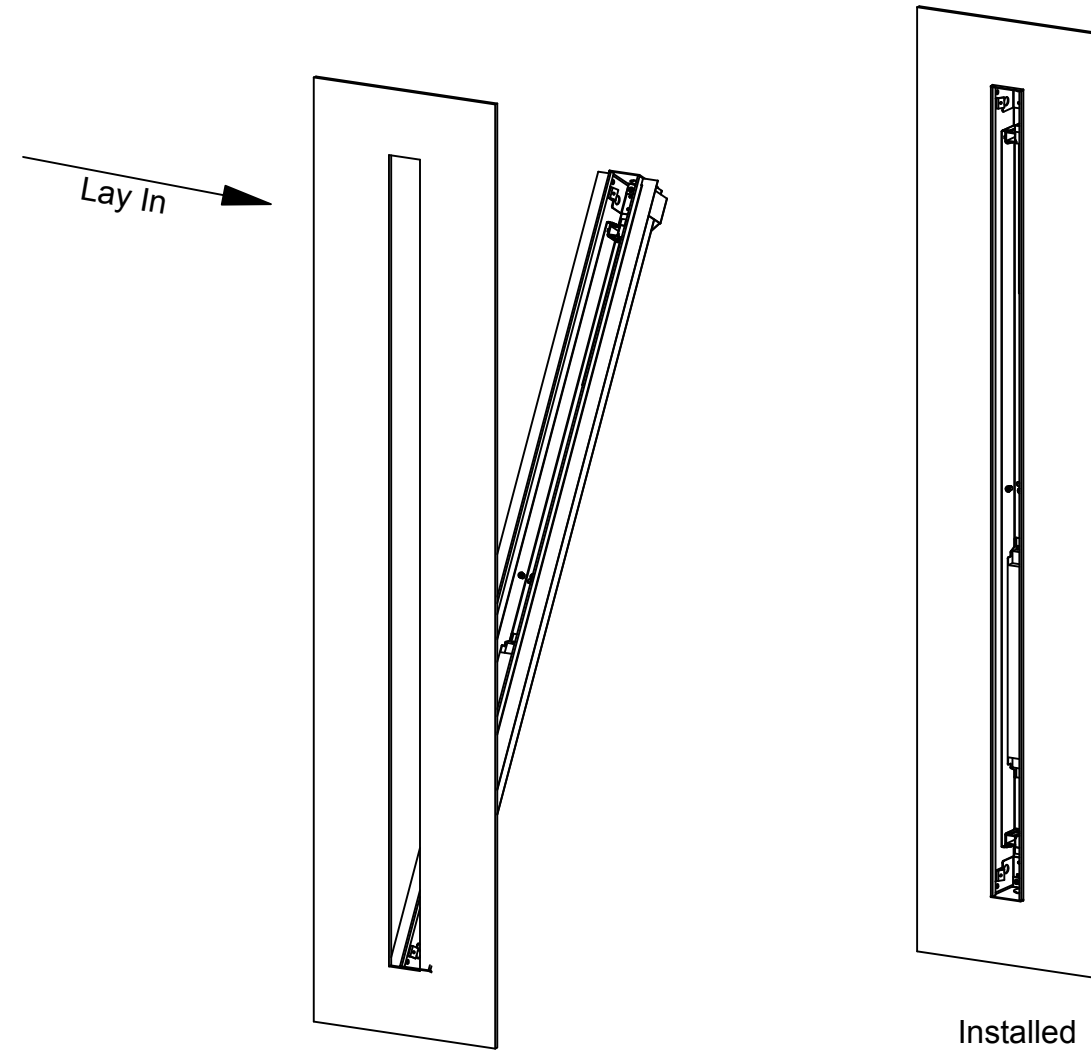


- **Note:** For ease of installation, rotate the fixture while passing thru the drywall cut out.
- Position one end of the fixture in to the opening as shown above.
- Gently lay the fixture in to the opening as shown. The flange should make full contact with the inside.

23-Recessed Installation Instructions

Step 4 - Finishing Touch




A Lock The Fixture

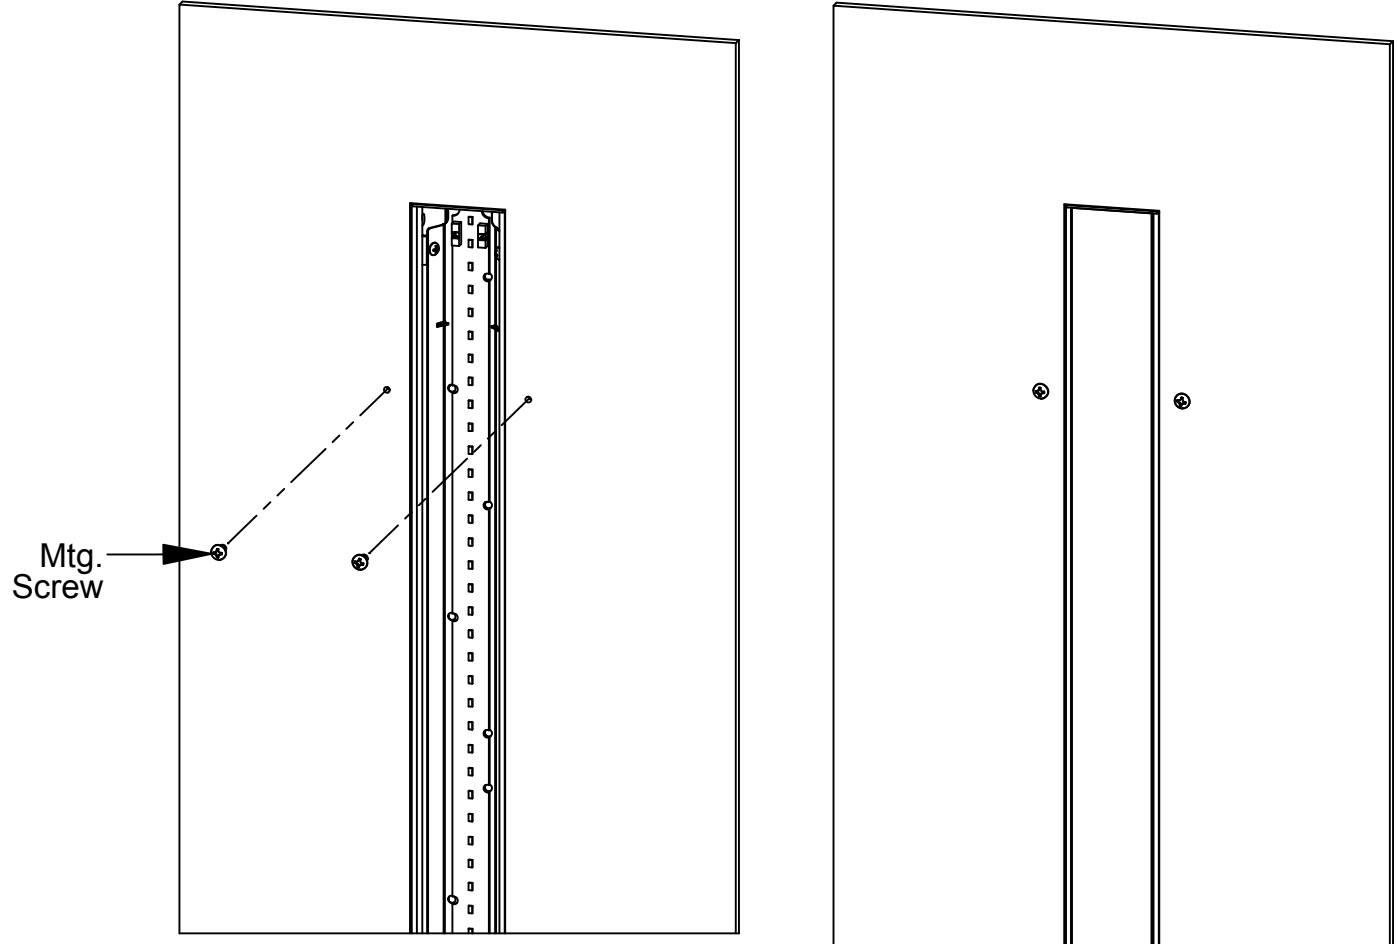


- While supporting the fixture, secure to the mounting surface using sheetrock screws or similar.
- Make sure the screws are flush with the mounting surface.

B. Mud Over Screws

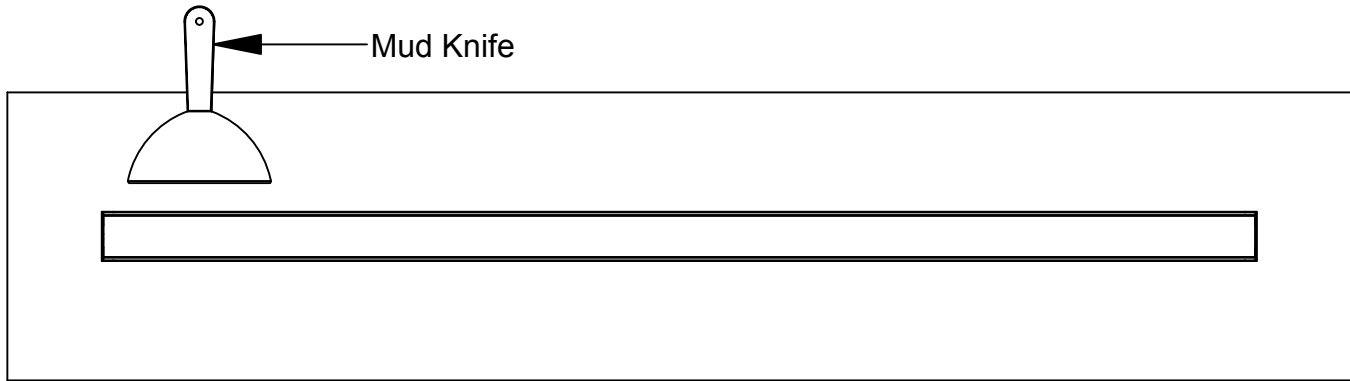


- **Note: Follow manufacturer's directions.** Mud over the mounting screws, leaving a smooth finish.
- Install is now complete.

Items Used In This Step



Phillips Screwdriver

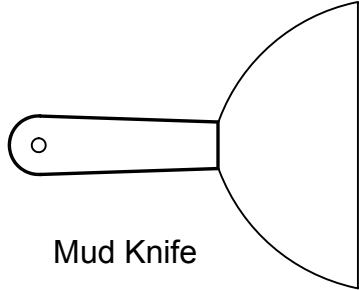

Mud Knife