

SHOP NOW >

FEATURES & SPECIFICATIONS

INTENDED USE

The **Vela Cylinder Architectural LED Cylinder Wall Mount 1-Direction Light Fixture** is a versatile low glare lighting fixture that can be used indoor and outdoor in commercial or retail settings. The Vela Architectural LED Wall Mount 1-Direction is used to accent and create dramatic effects while providing a great source of lighting directed up or down.

DETAILS

W 3.44" x **H** 5.125"

Construction: Square one piece high grade aluminum extrusion, end cap, faceplate, and a mounting plate
 Tamper Resistant
 Corrosion Resistant

Light Engine: LED Chip-On-Board

Lens: Square one piece extruded aluminum with powder coat finish, clear tempered glass, and silicone o-ring

Reflector: Glare-free, one piece, heavy gauge aluminum
Mounting: Includes bracket for installation directly to a 4" octagonal electrical junction-box

Caution: Use of surge protectors recommended on the power entering LED Housings. Surge damage is not covered by warranty.

ADDITIONAL FEATURES

Voltage: 120 (120-277 Available for Dimming)

Wattage: 15W

Lumens: 1000 lms


CRI: 84+

Dimming: Universal dimming system that works with most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V fluorescent dimmers

Life: L70 - 50,000 Hours

Emergency: 90 minutes minimum

Remote test switch, plate cover, junction box included

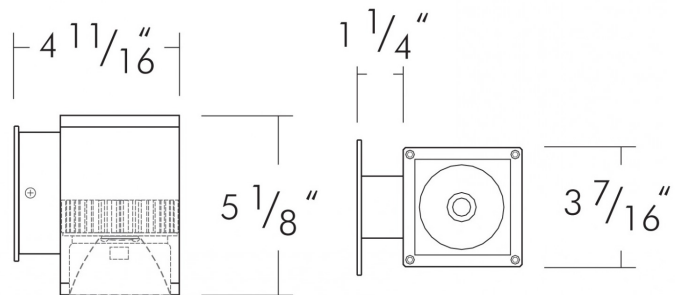

Ordering Information:

Example: (11225-DUN-WH-EM)

Model	Beam Spread	Dimming	Color Temp	Finish	Options
<input type="text" value="11225"/>	<input type="text" value="(Blank)"/>	<input type="text" value="(Blank)"/>	<input type="text" value="4000K"/>	<input type="text" value="WH"/>	<input type="text" value="EM"/>
Vela	60° Wide Flood	Non-Dimming (120V)	30K 3000K	White	Remote Emergency Backup Battery
	P 2° Pencil	DUN	17K ^{1,2} 1700K	BL Black	
	NS 10° Narrow Spot	UniDim (120/277V)	25K ^{1,2} 2500K	BR ¹ Bronze	
	S 20° Spot		27K ¹ 2700K	SL ¹ Silver	
	F 45° Flood		35K ¹ 3500K		
			50K ¹ 5000K		
			56K ^{1,2} 5600K		
			27C ¹ 2700K (97 CRI)		
			30C ¹ 3000K (97 CRI)		

¹Special Order. Minimum lead time may apply.

²Minimum Order Required (25).
 Note: Dark Sky compliant when pointed downwards.