



FIXTURE SPECIFICATIONS

INTENDED USE

The **Pavo LED Architectural Wall Mount Down Light** is a versatile low glare lighting fixture that can be used indoor and outdoor, up or down, in commercial or retail settings. The Pavo is used to accent and create dramatic effects while providing a great source of lighting from above.

FEATURES

- Construction:** Round One Piece High Grade Aluminum Extrusion with Die Cast Aluminum Top Plate
Tamper Resistant
- Adjustable Option:** 30° Tilt
- Light Engine:** LED Chip-On-Board
- Lens:** Round One Piece Extruded Aluminum with Powder Coat Finish, Clear, Tempered Glass and Silicone O-Ring
- Reflector:** Glare-Free, One piece, Heavy Gauge Aluminum
- Mounting:** Includes Bracket for Installation Directly to a 3-1/2" or 4" octagonal electrical junction-box
- Voltage:** 120 (120-277 Available for Dimming)
- CRI:** 84+
- Dimming:** Universal Dimming System Compatible with Most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V Fluorescent Dimmers
- Life:** L70 - 50,000 Hours
- Emergency:** 90 Minutes Minimum
Remote Test Switch, Plate Cover, Junction Box Included
- Listing:** ETL/cETL Listed
Suitable for Wet Location




ORDERING INFORMATION Example: (11225-DIR-15W-WF60-DUN-40K-WH-EM)


Model	Lumen Output	Beam Spread	Dimming	Color Temperature	Finish	Options
11225 Pavo-Square (Direct or Adjustable) View Pavo Direct View Pavo Adjustable	DIRECT DOWN LIGHT DIR-15W 15 watts 1000 lms DIR-22W 22 watts 1500 lms	<i>1-Direction</i> / <i>2-Direction</i> WF60 60° Wide Flood FL45 45° Flood PE2¹ 2° Pencil NS10¹ 10° Narrow Spot SP20¹ 20° Spot	ND Non-Dimming (120V) DUN UniDim (120/277V)	17K^{3,4} 1700K 25K^{3,4} 2500K 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K³ 5000K 56K^{3,4} 5600K 27C³ 2700K (97 CRI) 30C³ 3000K (97 CRI)	WH White BK Black BR³ Bronze SL³ Silver	EM Emergency
11226 Pavo-Round (Direct or Adjustable) View Pavo Direct View Pavo Adjustable	ADJUSTABLE ADJ-9W 9 watts 700 lms					
11227 Pavo-Square (2-Direction) View Product	2-DIRECTION 2D-30W 30 watts 2000 lms 2D-45W					
11222 Pavo-Round (2-Direction) View Product	45 watts 3000 lms					

¹Not Available for Adjustable Models.
²Special Order. Minimum lead time may apply.
³Minimum Order Required (25).


Square - Direct

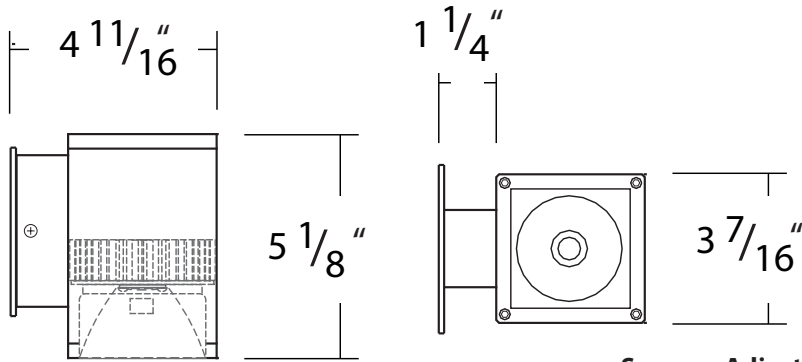

Square - Adjustable

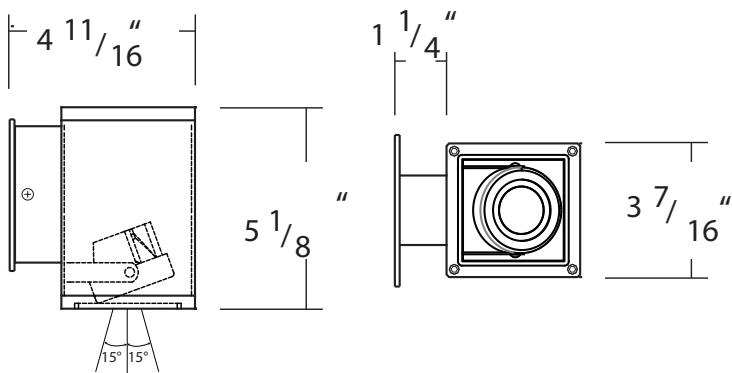

Round - Direct

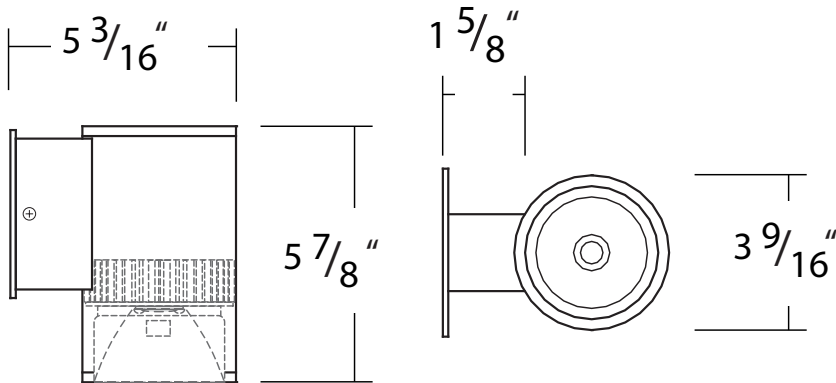

Round - Adjustable

