

SHOP NOW >

## FEATURES & SPECIFICATIONS

### INTENDED USE

The **Vela Cylinder Architectural LED Cylinder Wall Mount 1-Direction Light Fixture** is a versatile low glare lighting fixture that can be used indoor and outdoor in commercial or retail settings. The Vela Architectural LED Wall Mount 1-Direction is used to accent and create dramatic effects while providing a great source of lighting directed up or down.

### DETAILS

**D** 3.56" x **H** 5.86"

**Construction:** Round one piece high grade aluminum extrusion, end cap, faceplate, and a mounting plate Tamper Resistant

Corrosion Resistant

**Light Engine:** LED Chip-On-Board

**Lens:** Round one piece extruded aluminum with powder coat finish, clear tempered glass, and silicone o-ring

**Reflector:** Glare-free, one piece, heavy gauge aluminum

**Mounting:** Includes bracket for installation directly to a 4" octagonal electrical junction-box

**Caution:** Use of surge protectors recommended on the power entering LED Housings. Surge damage is not covered by warranty.

### ADDITIONAL FEATURES

**Voltage:** 120 (120-277 Available for Dimming)

**CRI:** 84+

**Wattage:** 15W


**Lumens:** 1000 lms

**Dimming:** Universal dimming system that works with most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V fluorescent dimmers

**Life:** L70 - 50,000 Hours

**Emergency:** 90 minutes minimum

Remote test switch, plate cover, junction box included

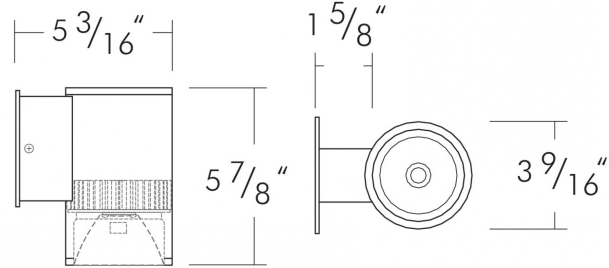

### Ordering Information:

Example: (11226-DUN-WH-EM)

Model	Beam Spread	Dimming	Color Temp	Finish	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>11226</b> Vela	<b>(Blank)</b> 60° Wide Flood <b>P</b> 2° Pencil <b>NS</b> 10° Narrow Spot <b>S</b> 20° Spot <b>F</b> 45° Flood	<b>(Blank)</b> Non-Dimming (120V) <b>DUN</b> UniDim (120/277V)	<b>(Blank)</b> 4000K <b>30K</b> 3000K <b>17K<sup>1,2</sup></b> 1700K <b>25K<sup>1,2</sup></b> 2500K <b>27K<sup>1</sup></b> 2700K <b>35K<sup>1</sup></b> 3500K <b>50K<sup>1</sup></b> 5000K <b>56K<sup>1,2</sup></b> 5600K <b>27C<sup>1</sup></b> 2700K (97 CRI) <b>30C<sup>1</sup></b> 3000K (97 CRI)	<b>WH</b> White <b>BL</b> Black <b>BR<sup>1</sup></b> Bronze <b>SL<sup>1</sup></b> Silver	<b>EM</b> Remote Emergency Backup Battery

<sup>1</sup>Special Order. Minimum lead time may apply.

<sup>2</sup>Minimum Order Required (25).  
Note: Dark Sky compliant when pointed downwards.