

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE


This specification-grade slim LED linear pendant delivers continuous clean High-CRI light and modern lines to commercial, hospitality and residential interior lighting projects. Our modern, slim profiles and stylish low-voltage linear suspension lights offer direct lighting for a variety of applications including: offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants and more. The Continuum integrated LED linear lighting is available in standard lengths of 2 ft., 3 ft., 4 ft., 6 ft., 8 ft

PRODUCT FAMILY

- 12100-10-S | Surface
- 12100-10-LR | Low-Profile Recessed
- 12100-10-R | Recessed
- 12100-10-R-PR | Recessed Perimeter
- 12100-10-R-RGBW | Recessed RGBW
- 12100-10-PR-RGBW | Perimeter Recessed RGBW

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Mounting:** 1/4" 18 Gauge Adjustable Aircraft Suspension Cable with
- Canopy Voltage:** 24V LED Fixture, 120-277V Triac, ELV, MLV and 0-10V
- Remote Driver Remote Driver:** Low-Voltage Driver Required (Included)
- Wattage:** 7.0 Watts/Foot
- Lumens:** 784 Lumens/Foot. Lumen output is specified for the LED component alone; the lens reduces lumen output by 20%
- Beam Angle:** 120°
- CRI:** 95+
- Life:** 50,000 Hours L70
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** Title 24 JA8, cUL Listed (LED and Driver Components Only)
Housing is NOT cUL Listed.

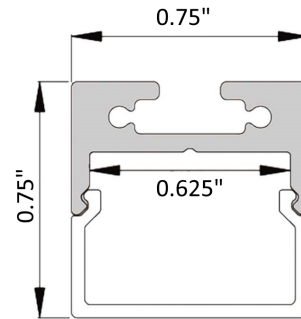


ORDERING INFORMATION Example: (12100-10-P-2-SL-27K-010)

Model	Length	Finish	Color Temp	Dimming Driver	Options
12100-10-P Pendant	2 2 Foot	SL Silver	27K 2700K	TEM TRIAC, ELV, MLV 100-1% 010 0-10V 100-10%	WL Wet Location IP65
	3 3 Foot	WH White	30K 3000K		
	4 4 Foot	BK Black	35K 3500K		
	6 6 Foot	XXXX Custom	40K 4000K		
	8 8 Foot	Finish	50K 5000K		
	CS Custom Length <i>Specify Length in Feet</i>	<i>Replace XXXX with RAL#</i>			

REMOTE DIMMING DRIVER SPECIFICATIONS

Driver SKU	Class	Dimensions	Dimming Capabilities	Voltage
TEM-30W	None	L 6.5" (165.1MM) W 3.63" (92.2MM) H 1.03" (26.2MM)	TRIAC, ELV, MLV	100~277V AC
TEM-60W	None	L 7.4" (188MM) W 3.63" (92.2MM) H 1.03" (26.2MM)	TRIAC, ELV, MLV	100~277V AC
TEM-96W	None	L 8.67" (220.2MM) W 3.67" (93.2MM) H 1.62" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-150W	None	L 10.25" (260.3MM) W 4.06" (103.2MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-192W	Class 2	L 11" (279.4MM) W 4" (101.6MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-200W	None	L 10.25" (260.3MM) W 4.06" (103.2MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-288W	Class 2	L 11.85" (300.99MM) W 4.25" (107.95MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-300W	None	L 10.25" (260.3MM) W 4.06" (103.2MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
010-60W	Class 2	L 12.1" (307.3MM) W 2.36" (60MM) H 1.4" (35MM)	0-10V	120~277V AC
010-96W	Class 2	L 12.1" (307.3MM) W 2.36" (60MM) H 1.4" (35MM)	0-10V	120~277V AC

WIRING DIAGRAM

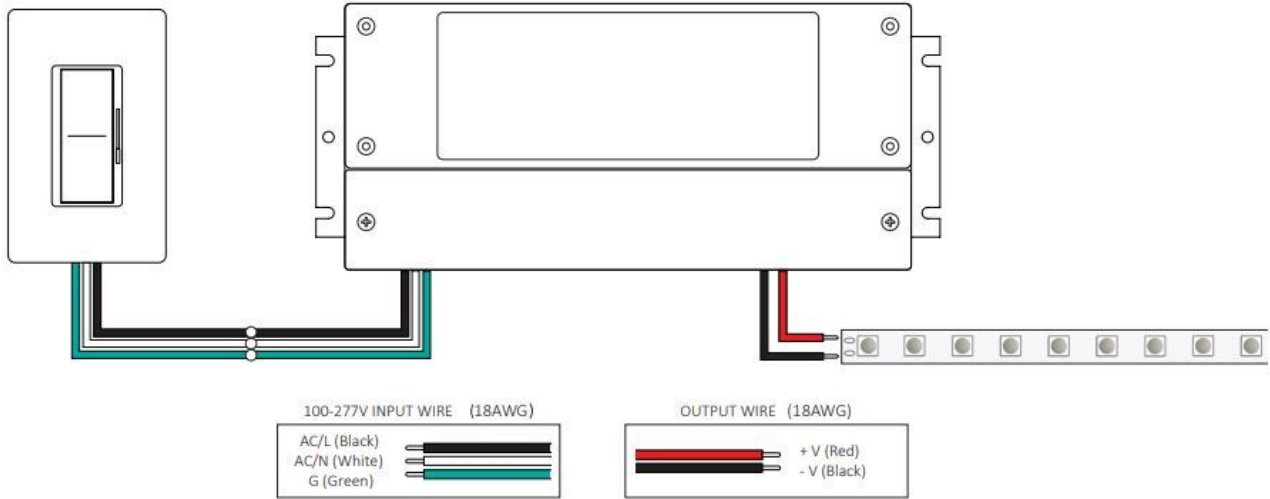

COLOR TEMPERATURE GUIDE

<p>2700K</p> <p>WARM WHITE</p> <p>friendly personal intimate</p> <p>HOMES LIBRARIES RESTAURANTS</p> <p>✓</p>	<p>3000K</p> <p>SOFT WHITE GLOW</p> <p>soft warm pleasing</p> <p>HOMES HOTEL ROOMS LOBBIES RETAIL STORES</p> <p>✓</p>	<p>3500K</p> <p>NEUTRAL GLOW</p> <p>sociable inviting non-threatening</p> <p>EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS</p> <p>✓</p>	<p>4000K</p> <p>DAYLIGHT GLOW</p> <p>neat clean efficient</p> <p>OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS</p> <p>✓</p>	<p>5000K</p> <p>CRYSTAL WHITE GLOW</p> <p>bright cool alert</p> <p>GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS</p> <p>✓</p>
--	---	--	---	---