

READ AND SAVE THIS INSTRUCTION SHEET

(1) ATTENTION


- 1.1 To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
- 1.2 All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with the methods of installing electrical wiring, secure the services of a qualified licensed electrician.
- 1.3 These fixtures are intended to be building mounted and must be supported by the building structure.
- 1.4 Do not operate the lighting fixture close to any combustible material.
- 1.5 Ensure that the fitting is cool and switched off before changing the bulb.
- 1.6 Do not use bulbs exceeding maximum wattage as marked on lighting fixture.

(2) CAUTION BEFORE INSTALLATION


- 2.1 Prepare tools and materials required, e.g.: Ladder, Wrench, Wire cutter, Screw driver, Bulbs and Wiring supplies as required by electrical code.
- 2.2 Before starting the installation, disconnect the power by opening the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.
- 2.3 If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring.
- 2.4 No rough or sharp edges are in contact with any of the wire to ensure the insulation on any of the wires has not been damaged during installation.
- 2.5 The bare or green insulated wire are for grounding, do not connect with current carrying wires.
- 2.6 Firstly connect white (or blue) fixture wire with white supply wire and then connect black (or brown) fixture wire with black supply wire. after fixture wires are connected with supplier wires, the bare parts of wires need to be completely covered by connector, to prevent from causing short circuit and electric leakage.

The method of wiring and operation refer to circuit diagram 1 and circuit diagram 2:

Circuit diagram 1

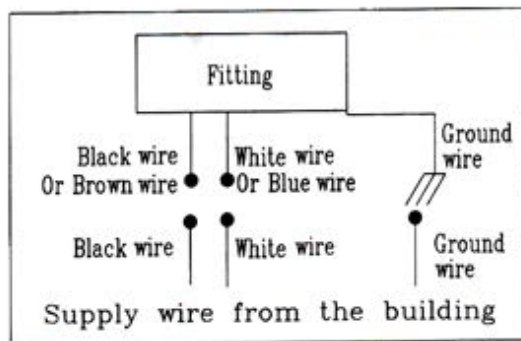

Circuit diagram 2

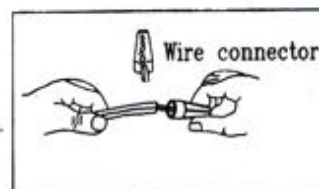

FIGURE

- ① OUTLET BOX IN THE BUILDING
- ⑥ WIRE CONNECTORS (OPTIONAL) 2PCS
- ⑬ WIRE CONNECTOR (FOR GROUND WIRE) 1PC
- ⑤ FIXTURE GROUND WIRE
- ② CROSSBAR 1PC
- ③ LONG SCREWS 2PCS
- ④ SHORT SCREWS 2PCS
- ⑭ HEX NUTS 2PCS
- ⑰ GREEN SCREW 1PC

- ⑦ CANOPY
- ⑧ BALL NUTS 2PCS
- ⑬ BUSHING
- ⑫ COVER
- ⑮ NIPPLE
- ⑩ BRACKET
- ⑪ SHADE

(3) INSTALLING WAY

- ① OUTLET BOX IN THE BUILDING
- ② CROSSBAR 1PC.
- ③ LONG SCREWS 2PCS: PLACE THE SUPPLIED ③ LONG SCREWS THROUGH THE HOLES IN THE ② CROSSBAR, ADJUST TO THE DESIRED LENGTH AND SECURE TIGHTLY WITH ④ HEX NUTS. THIS WILL PREVENT THE ③ LONG SCREWS FROM ROTATING WHEN ⑧ NUT CAPS ARE ATTACHED
- ④ SHORT SCREWS 2PCS : SECURE ② CROSSBAR TO ① OUTLET BOX WITH THE SUPPLIED ④ SHORT SCREWS
- ⑤ FIXTURE GROUND WIRE: FIRSTLY, THE THREE-CORD CABLE AT THE BACK OF CANOPY SHOULD BE TIED, THEN MAKE ⑤ FIXTURE GROUND WIRE AND GROUND WIRE IN OUTLET BOX BE WOUND TOGETHER AND FIXED WITH ⑬ WIRE CONNECTOR (PROVIDED).
- ⑥ WIRE CONNECTORS 2PCS(OPTIONAL): CONNECT FIXTURE WIRE WITH SUPPLY WIRE TOGETHER.
- ⑦ CANOPY : PUT ③ LONG SCREWS THROUGH THE HOLE OF ⑦ CANOPY AND TIGHTEN ⑦ CANOPY AGAINST THE CEILING WITH ⑧ BALL NUTS .
- ⑨ TURN ON ELECTRICITY AFTER ASSEMBLING THE BULBS, TO TEST IF THE ELECTRICITY CAN WORK NORMALLY. (MAKE SURE THE BULBS CAN WORK)
- ⑩ BRACKET : PUT SIDEARM ⑩ BRACKET AND SOCKET INTO ⑪ SHADE HANGING ⑪ SHADE VERTICALLY.
- ⑪ SHADE 1PC
- ⑫ COVER: INSERT ⑮ NIPPLE THROUGH THE CENTRE HOLE OF ⑫ COVER .
- ⑬ BUSHING : SCREW TIGHTLY ⑬ BUSHING ON ⑮ NIPPLE LIFTING UP ⑪ SHADE VERTICALLY. TAKE CARE WHEN ASSEMBLING OR DISASSEMBLING ⑪ SHADE TO AVOID THE BREAK OF ⑪ SHADE .