



## FIXTURE SPECIFICATIONS

### INTENDED USE

The specification grade **Slim Continuum 8 Architectural LED Linear Pendant Lighting** delivers continuous clean lines and clear light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish linear chandelier designs offer excellent direct lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The Continuum integrated LED linear lighting is available in standard lengths of 2', 3', 4', 6' and 8'.

### FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Continuous Row:** Tandem Mount for Continuous Run Application, Equipped with Male & Female Quick Connect Harnesses
- Finish:** Anodized Silver
- Input Voltage:** 24V
- Remove Driver:** Low-Voltage Driver Required
- Wattage:** 6 Watts/Foot
- Lumens:** 500 Lumens/Foot
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Beam Angle:** 120°
- Mounting:** 144" 18 Gauge Adjustable Aircraft Suspension Cable with Canopy
- Life:** 50,000 Hours L70
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** cUL Listed (LED and Driver Components Only) Housing is NOT cUL Listed.

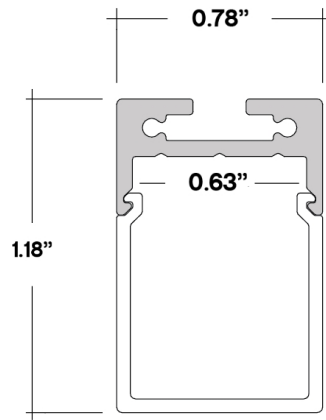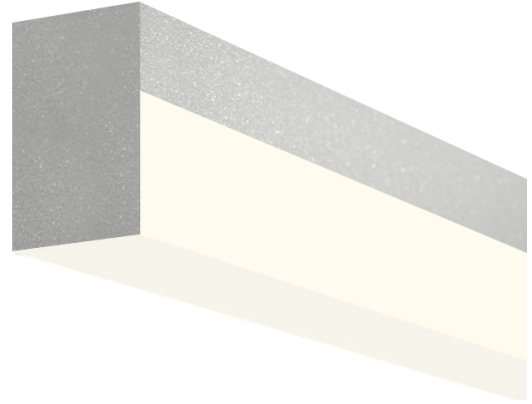

## ORDERING INFORMATION Example: (12100-8-P-4-27K-SL-TR)

Model	Mounting	Length   Lumens   Wattage	Trim	Finish	Driver
<b>12100-8</b>	<b>P</b> Pendant	<b>4</b> 4 Foot   2000lms   24W	<b>27K</b> 2700K	<b>SL</b> <small>Standard</small> Silver	<b>TRI</b> Triac (120-277V) 3-wire 100-1%  <b>010</b> 0-10V (120-277V) 5-wire 100-10%  <b>ELV</b> Electronic Low Voltage (120V) 3-wire
	<b>S</b> Surface	<b>8</b> 8 Foot   4000lms   48W	<b>30K</b> 3000K	<b>WH</b> White	
			<b>35K</b> 3500K	<b>BK</b> Black	
			<b>40K</b> 4000K		
			<b>50K</b> 5000K		