

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

This architectural-grade, efficient, high-output, high-CRI LED light fixture functions inside a 270° rotating tube, directing light where needed. It's available in 2 foot, 3 foot, 4 foot, 6 foot & 8 foot lengths. The Gladstone pendant or surface-mount linear ceiling or wall light is the go-to, specification-grade commercial LED light fixture choice for architects and lighting designers in applications ranging from offices and schools to dining, hospitality, modern gyms and fitness centers. This product is made in Burbank, Calif., U.S.A.

FEATURES

- Construction:** Matte anodized extruded aluminum driver housing
- Mounting:** Standard 8 ft. gray adjustable power cord and aircraft cables, with push button grippers supplied. Custom length mounting option available.
- Pendant Driver:** Surface mount is standard (Flush mount and remote installation available upon request)
- Input Voltage:** 120/277V, 50/60Hz
- Color Quality:** 90+ CRI
- Dimming:** 0-10V 5-Wire 1% dimming
- Emergency Lighting:** Optional emergency LED driver with remote test switch
- EM Dimensions:** 36" L 3.4" H 4.25" W
- Listings:** cULus listed for damp locations, Made in USA
- Warranty:** 1 Year carefree for parts & components (Labor not included)





Pendant


Standard
No Trim



Surface




Lamp rotates 270°, in 15° stepped increments, to direct light where needed.

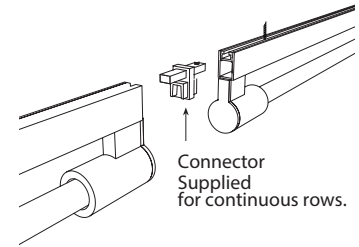

Connector Supplied for continuous rows.



Optional Trims

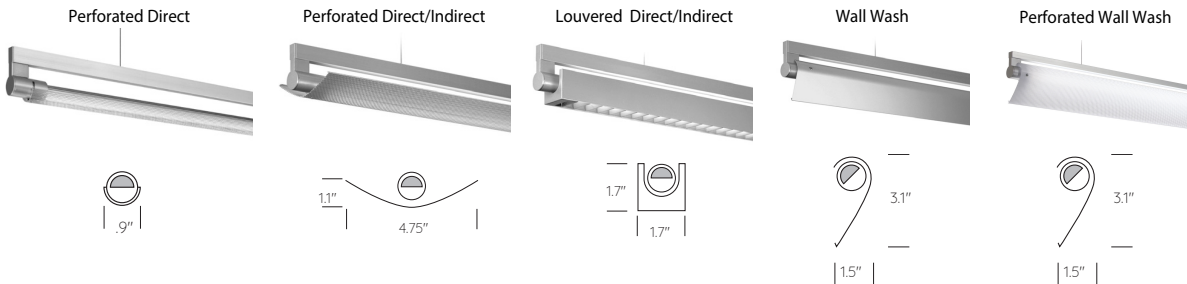


ORDERING INFORMATION Example: 12160-P-PD-2-30K-SR-AC8

Model	Mounting	Trim	Length Wattage Lumens	Color Temp	Pendant Driver	Pendant Cord	Options
12160	P Pendant	Blank <small>Standard</small>	2	30K 3000K	SR <small>Standard</small> Surface	AC8 <small>Standard</small> 8' Adjustable aircraft cable	EM10 10W Remote Emergency Back Up Battery
		No Trim	2 FT 14W 1443lms				
	S ² Surface	PD	3	35K 3500K	FL Flush	ACx Custom length adjustable aircraft cable (Max 25')	
		Perforated Direct	3 FT 21W 2165lms	40K 4000K	RMT Remote T-Bar		
		PDI	4	4 FT 28W 2886lms	RMW Remote Drywall		
		Perforated Direct/Indirect	6 ¹	6 FT 42W 4330lms			
		Loudered Direct/Indirect	8 ¹	8 FT 56W 5772lms			
WW Wall Wash							
PWW Perforated Wall Wash							
		CRXX ¹	Continuous Row				
			Replace XX with Length in Feet				

¹ 6 FT fixture consists of two 3 FT fixtures in continuous row.
² 8 FT fixture consists of two 4 FT fixtures in continuous row.
² Driver is Integrated into railing


FIXTURE DIMENSIONS

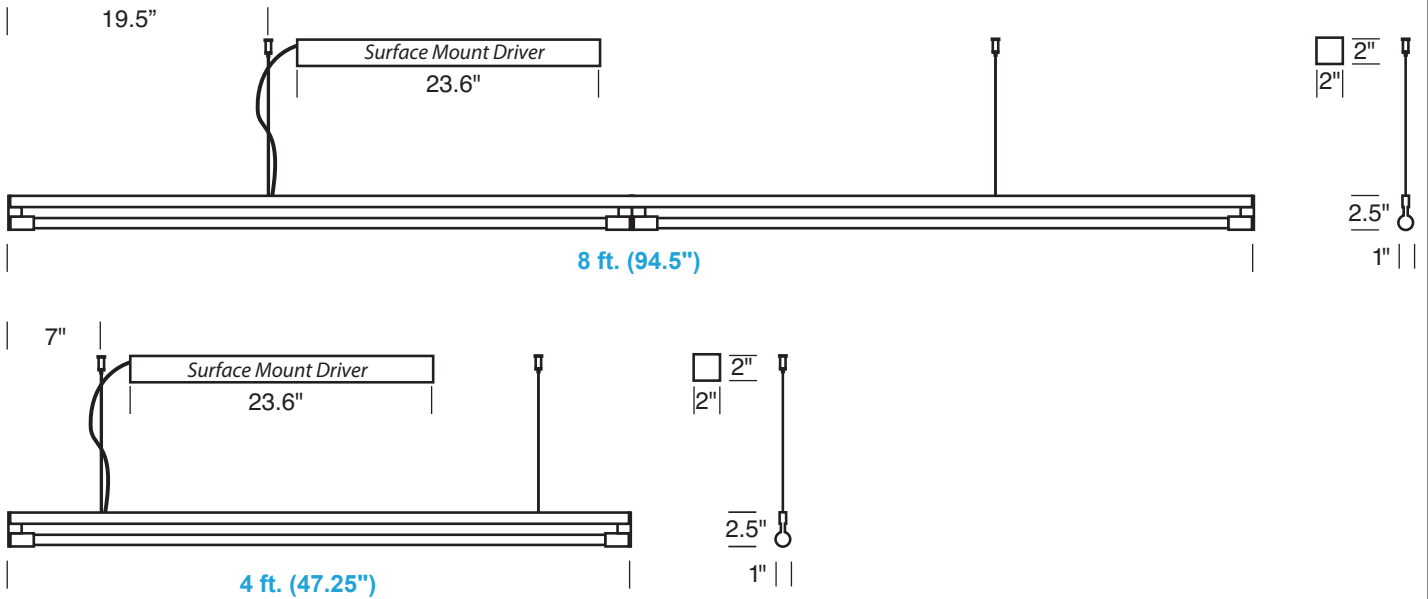


Alcon Gladstone 12160 Architectural Linear Pendant or Surface-Mounted LED Light

HOUSING DIMENSIONS


Remote T-Bar Housing: Remote housing for T-bar ceiling includes bar hangers.
Dimensions: 27" L 3.4" H 4.25" W

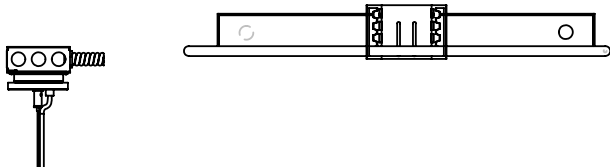

Flush Housing: 22" flush mount ballast housing, for joist mount rough-in.

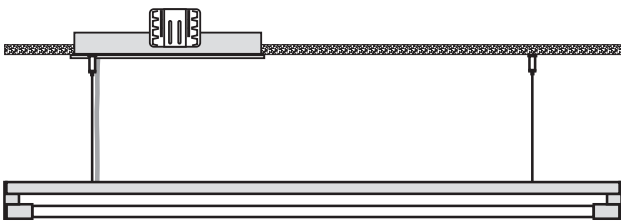

Remote Emergency: Remote EM housing for T-bar ceiling includes bar hangers and remote test switch.
Dimensions: 36" L 3.4" H 4.25" W

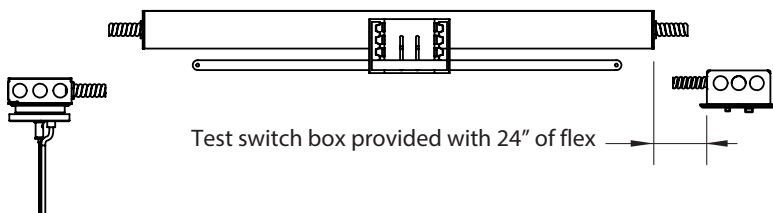

COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE	NEUTRAL WHITE	COOL WHITE	DAY LIGHT
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X