
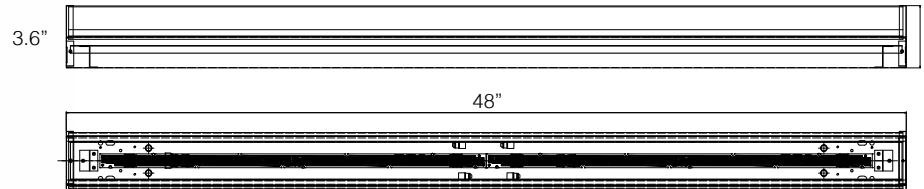


SHOP NOW >



## FIXTURE SPECIFICATIONS

### INTENDED USE

The **Chela III Architectural LED Pendant Mount Fixture** offers functionality and premium performance and can be installed individually or in patterns to provide clean lines and clear lighting. The Chela III is an ideal option for lobbies, corridors, hallways, and other residential and commercial applications.

### FEATURES

- Construction:** Highly Reflective Powder Coat Finish
- Electrical:** Comes Equipped with Quick Disconnect for Compliance with US Code
- Optics:** Precision-Formed Diffuser and Reflector for Consistency, Reduced Glare and Pixelation
- Voltage:** 120-277V
- Dimming:** 0-10V to 10%
- CRI:** 83+
- Life:** 70,000 Hours (L70)
- Power Factor:** +0.90
- Starting Temperature:** -4°F (-20°C) - 131°F (55°C)
- THD:** 10%
- Warranty:** 7 Years
- Listings:** UL Listed and Labeled Suitable for Damp Locations



## ORDERING INFORMATION Example: (12185-8-38W-35K-EM7)

Model	Size & Wattage	Color Temp	Mounting	Options
<b>12185</b>	<b>2-20W</b> 2 FT   20 watts   2600 lms	<b>35K</b> 3500K	<b>AC</b> 120" Toggle Kit Aircraft Cable	<b>DH</b> Integrated Daylight Harvesting
	<b>4-22W</b> 4 FT   22 watts   2400 lms	<b>40K</b> 4000K	<b>CH</b> 40" Jack Chain	<b>OS</b> Occupancy Sensor
	<b>4-23W</b> 4 FT   23 watts   2900 lms	<b>50K</b> 5000K		<b>EM7</b> 700 lms Emergency Backup
	<b>4-32W</b> 4 FT   32 watts   4200 lms		<b>EM14</b> 1400 lms Emergency Backup	
	<b>4-46W</b> 4 FT   46 watts   5900 lms		<b>EM20</b> 2000 lms Emergency Backup	
	<b>8-38W</b> 8 FT   38 watts   4900 lms		<b>WG</b> Wireguard	
	<b>8-54W</b> 8 FT   54 watts   7200 lms			
	<b>8-65W</b> 8 FT   65 watts   8500 lms			
	<b>8-90W</b> 8 FT   90 watts   11700 lms			