

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Get damp location-rated, pendant or surface-mounted downlight with this commercial-grade compact, efficient LED light strip for indoor application in commercial, industrial, institutional or architectural installations. Among the product's features are a Color Temperature Switch at 3500K, 4000K and 5000K with color temperature voltage ranging from 120 to 277 (50/60 Hz). The crisp lighting on our light strip can also be dimmed.

FEATURES

Color Temperature Switch: Switch from 3500K, 4000K & 5000K color temperatures

Voltage: 120-277 (50/60 Hz)


Dimming: 0-10V dimming

Efficiency: 130 lm/W

Operating Temperature: -20°C (-4°F) - 50°C (122°F)

Warranty: 5 years carefree for parts & components (Labor not included)

Listings: UL, DLC, Suitable for damp locations

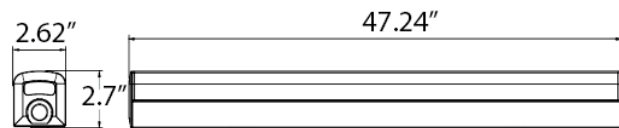

ORDERING INFORMATION Example: (12185-P-220-WH)

Model	Mounting	Length Wattage Lumens	Finish	Options
12185	P 6' Aircraft Cable Pendant	2 Foot 2-20 2 Foot 20 Watts 2600 Lumens	WH White	EM Internal Emergency Back-Up Battery
	S Surface	4 Foot 4-32 4 Foot 32 Watts 4160 Lumens	BK Black	
		4-46 4 Foot 46 Watts 5980 Lumens		

VE 12185 Vela Linear Pendant or Surface-Mounted LED Downlight Strip