

Project Name:

Type:



Quantity:

INTENDED USE

Our large, purposeful, commercial-grade LED ring light yields strong, streamlined direct downlight. This perfectly circular design suits residential, hospitality and commercial interiors. For direct lighting in today's office, classroom or conference room, this pendant light with aluminum outer housing, glare-free reflector and adjustable aircraft cables, comes in a variety of lengths and finishes. Available with Bluetooth Mesh.

FEATURES

- Standard Canopy:** 10" x 2.25"
- Remote Canopy:** 3" x .45"
- Pendant:** 8' adjustable aircraft cables/power cord included (Custom length available, consult MFG)
- Construction:** Extruded aluminum outer housing Galvanized, Adjustable power cord and AC cables with push button grippers are standard
- Lens:** White frosted acrylic diffuser
- Reflector:** Glare-free, one piece, heavy gauge aluminum
- Mounting:** All standard J-boxes
- Voltage:** 120/277VAC
- CRI:** 90
- Dimming:** 0-10V (100-1%)
- Emergency:** 90 minutes minimum, remote install only

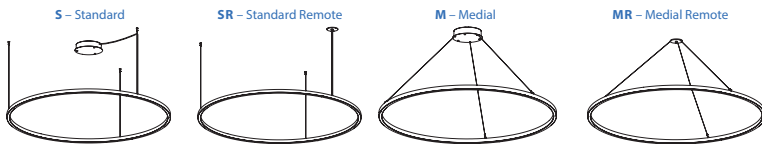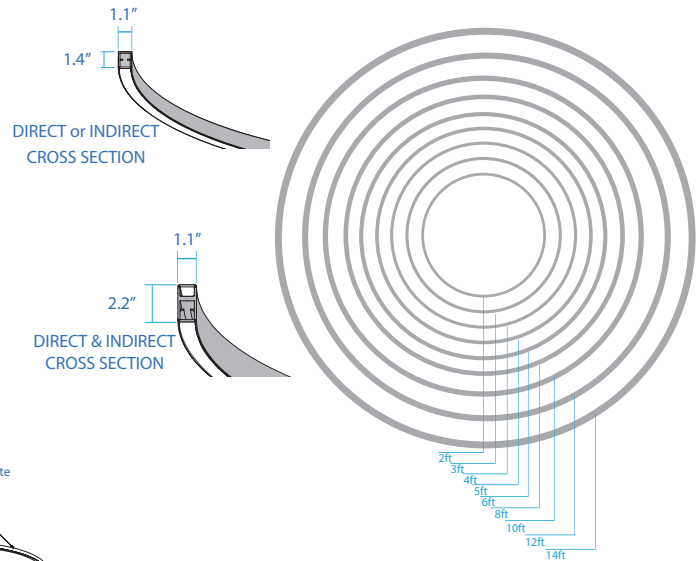

ORDERING INFORMATION Example: [12253-D-2-30K-SL-WH-S-EM](#)

Model	Light Distribution	Size	Color Temp	Finish	Mounting	Options	
12253	D Direct	2 2ft	30K ^{Standard} 3000K	SL ^{Standard} Silver	S² Standard	EM7 7W Remote Emergency Back-Up Battery	
	I Indirect	3 3ft	35K 3500K	BK Black	SR Standard Remote	XX Custom AC Cable/ Power Cord (25' Max)	
	DI Direct/Indirect	4 4ft					
			5 5ft	40K 4000K	WH White		
			6 6ft				
			8 8ft				
			10 ¹ 10ft				
			12 ¹ 12ft				
		14 ¹ 14ft					

¹ Only available in Direct/Indirect
² Not available for sizes from 8ft to 14ft

Size (ft)	Wattage	Lumens	Weight (lb)
2	DI 52W D,I 26W	DI 4,337 D,I 2,166	DI 8 D,I 7
3	DI 78W D,I 39W	DI 6,507 D,I 3,250	DI 16 D,I 14
4	DI 104W D,I 52	DI 8,676 D,I 4,333	DI 18 D,I 16
5	DI 130W D,I 65W	DI 10,844 D,I 5,416	DI 20 D,I 18
6	DI 156W D,I 78W	DI 13,014 D,I 6,500	DI 30 D,I 20
8	DI 209W D,I 104W	DI 17,352 D,I 8,666	DI 50 D,I 30
10	DI 267W	DI 22,152	DI 63
12	DI 312W	DI 26,028	DI 80
14	DI 365W	DI 34,704	DI 90



COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	✓	✓	✓	X