

## FEATURES & SPECIFICATIONS

### INTENDED USE

The specification grade decorative Architectural LED Ring Light delivers continuous clean lines and clear circle light to commercial, hospitality and residential interior lighting applications. Our modern, slim profiles and stylish hanging lights designs offer excellent direct lighting, indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more. The ring light ring chandelier is available in multiple lengths and several finishes.

### DETAILS

**W** 1.4" x **Depth** 1.1"

**Standard Canopy:** 10" x 2.25"

**Remote Canopy:** 3" x .45"

**Pendant:** 8' Adjustable Aircraft Cable/Power Cord Included  
(Custom length available)

**Construction:** Extruded aluminum outer housing  
Adjustable power cord and AC cables with push button  
grippers standard

**Lens:** Opal Acrylic diffuser

**Reflector:** Glare-free, one piece, heavy gauge aluminum

**Power Cable:** Grey finish jacket

**Mounting:** All standard J-boxes


### ADDITIONAL FEATURES

**Voltage:** 120/277

**CRI:** 90

**Dimming:** 0-10V, dims to 1%


**Emergency:** 90 minutes minimum, Remote install only





S – Standard



R – Remote

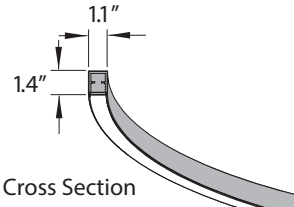

Cross Section

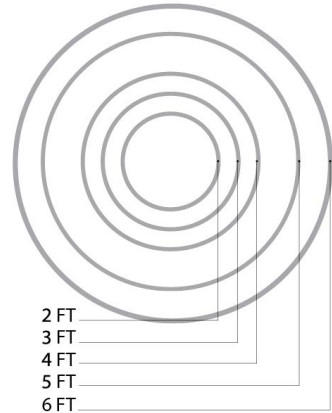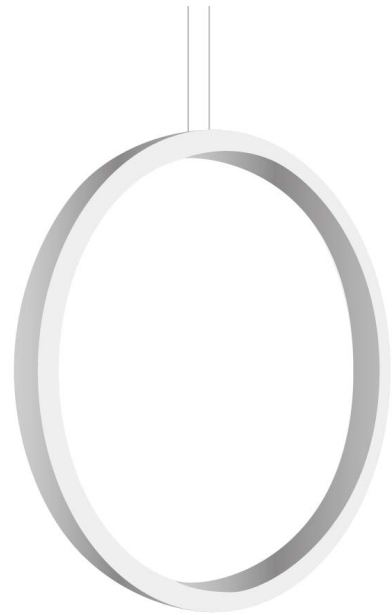

### Ordering Information:

Example: (12254-2-23W-30K-SL-S-EM)

Model	Size/Wattage/Lumens	Color Temp	Finish	Mounting	Options
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>12254</b> Circline	<b>2-23W</b> 2' - 23 watts, 4100 lms <b>3-35W</b> 3' - 35 watts, 6100 lms <b>4-47W</b> 4' - 47 watts, 8150 lms <b>5-59W</b> 5' - 59 watts, 10200 lms <b>6-71W</b> 6' - 71 watts, 12150 lms	<b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>SL</b> Silver <b>WH</b> White <b>BK</b> Black	<b>S</b> Standard <b>R</b> Remote	<b>EM</b> 7W Emergency Battery Pack <b>XXAC</b> Custom AC Cable/Power Cord (25' Max)