

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Igloo Architectural LED Adjustable Accent Light Fixture** delivers direct accent surface, pendant, wall, and ceiling track lighting to commercial, hospitality and residential interior track or surface lighting applications. Architecturally styled Cylinder LED track lights feature small, unobtrusive size and are highly adjustable. Our modern LED lighting designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

PRODUCT FAMILY ACCESSORIES


- 13002-1** | 2 FT Track Channel
- 13004-1** | 4FT Track Channel
- 13941-1** | Live End Feed
- 13991-1** | Limiter Live End Feed
- 13927-1** | T-Bar Live End Feed
- 13943-1** | L-Connector
- 13946-1** | X-Connector
- 13949-1** | Mini Connector
- 13980-1** | Conduit Connector
- 13929-1** | Floating Canopy Connector

FEATURES


- Construction:** Extruded Aluminum with Die-Cast Aluminum Swivel and One Piece Combination Heat Sink and Reflector Enclosure. Luminaire is Adjustable with Maximum Swivel Angle to 85° Off Center and a 325° Rotation
- Reflector:** Multifaceted Specular Reflector with Gasketed Glass Lens is Standard for 40° Flood.
- Driver:** Universal Dimming Included
2-Wire Incandescent (120V)
Electronic Low Voltage (120V)
0-10V (120-277V)
- Life:** 50,000 Hours L70
- Warranty:** 3 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** cETL Listed




SMALL 2.5" Diameter

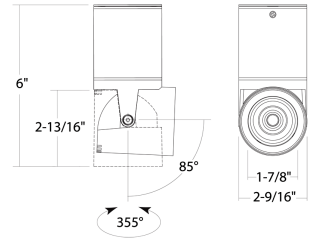

MEDIUM 3" Diameter

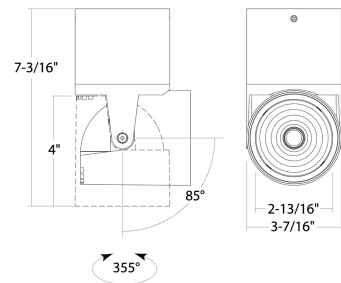

LARGE 5" Diameter

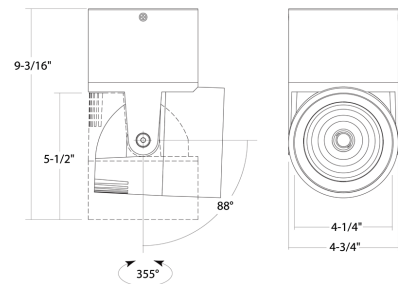

ORDERING INFORMATION Example: (13101-SM7-BK-15-T27-C90-H-ND-LV)

Model	Size Wattage Lumens	Finish	Beam Spread	Color Temp CRI	Mounting	Options
13101	SM7 2.5" Dia 10 watts 700 lumens	BK Black	15 15° Narrow Spot	Residential T27-C90 2700K 90 CRI	H H-Track ²	LV Glare Control Louver FL Frosted Lens
	SM9 2.5" Dia 15 watts 1000 lumens	WH White	25 25° Narrow Flood 40 40° Flood <i>Standard</i> 60 60° Wide Flood ¹	T27-C97 2700K 97 CRI T30-C90 3000K 90 CRI T30-C97 3000K 97 CRI WD Warm Dimming 1850K - 3000K		
	MD15 3.5" Dia 20 watts 1500 lumens			Commercial T35-C90 3500K 90 CRI	S Surface 4" Jbox Ceiling & Wall	
	MD20 3.5" Dia 30 watts 2000 lumens			T40-C90 4000K 90 CRI		P12 12" Stem Pendant P24 24" Stem Pendant P36 36" Stem Pendant P48 48" Stem Pendant
	LG25 5" Dia 30 watts 2500 lumens				P12A 12" Adjustable Stem P24A 24" Adjustable Stem P36A 36" Adjustable Stem P48A 48" Adjustable Stem	
	LG35 5" Dia 45 watts 3500 lumens					

¹Not available on LG25 or LG35.

²Only Supports 2-Wire Incandescent Dimming