

Project Name:

Type:

Quantity:

**FIXTURE SPECIFICATIONS**

**INTENDED USE**

The 14026 Architectural LED Recessed Multiple Lighting System features versatile and energy efficient lighting. The 14026 is an ideal option for all interior applications.

**DETAILS**

**1 Lamp** - W 6.25" x H 9.75" x L 6.25"

**2 Lamp** - W 6.25" x H 9.75" x L 12.25"

**3 Lamp** - W 6.25" x H 9.75" x L 18.5"

**ADDITIONAL FEATURES**

**Construction:** 0.05" galvanized steel housing for new or remodel construction in drywall ceilings

**Faceplate:** Aluminum flanged seamless stamped metal. Each gimbal adjustable up to 35°. Adjustable brackets and mud ring included.

**Minimal Clearance:** 3" from thermal insulation and 1/2" from any adjacent building components

**Wattage:** 30W

**Lumens:** 2100 lms per LED module



**Dimming:** 0-10V

**CRI:** 90+


**Life:** 35,000 Hrs @ 70°C / 50,000 Hrs @ 65°C

**Operating Temperature:** 0°C - 45°C maximum ambient temperature

**Listings:** cULus listed, Damp-Location rated, Energy Star certified, Assembled in the USA

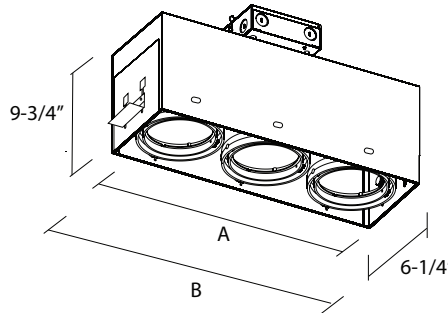


1 Row / 1 Lamp  
Cut-out: 6-1/4" x 6-1/4"




(A) 6.25" (B) 9.75" (w/Adjustable Bracket)

1 Row / 2 Lamp  
Cut-out: 12-1/4" x 6-1/4"



(A) 12.25" (B) 15" (w/Adjustable Bracket)

1 Row / 3 Lamp  
Cut-out: 18-1/2" x 6-1/4"

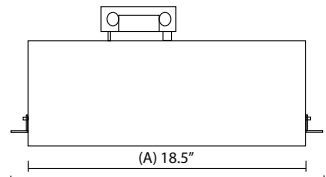


(A) 18.5" (B) 21" (w/Adjustable Bracket)



**ORDERING INFORMATION** Example: (14026-2-1-32-30-B-F2)

Lamp can be adjusted up to 35°

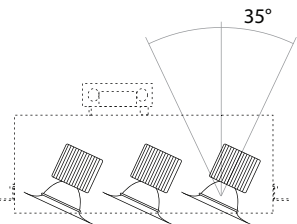

| Model        | # of Lamp                     | Voltage       | Beam Spread                             | Color Temp      | Finish         | Frame                                  |
|--------------|-------------------------------|---------------|---|-----------------|----------------|--|
| <b>14026</b> | <b>1</b> 1 Lamp Configuration | <b>1</b> 120V | <b>32</b> <sup>Standard</sup> 32° Flood | <b>27</b> 2700K | <b>W</b> White | <b>F1</b> 1-Lamp Frame-in <sup>1</sup> |
|              | <b>2</b> 2 Lamp Configuration | <b>2</b> 277V | <b>16</b> 16° Spot                      | <b>30</b> 3000K | <b>B</b> Black | <b>F2</b> 2-Lamp Frame-in <sup>1</sup> |
|              | <b>3</b> 3 Lamp Configuration |               |   | <b>35</b> 3500K |                | <b>F3</b> 3-Lamp Frame-in <sup>1</sup> |
|              |                               |               |   | <b>40</b> 4000K |                |  |

<sup>1</sup> Required for new construction