

FIXTURE SPECIFICATIONS

INTENDED USE

The **14065 Abright 2x4 Architectural LED Troffer and Parabolic Fixture** Specification Grade light fixture is designed to reduce glare and provide soft, dispersed illumination that is highly efficient and cost-saving with easy installation. The Abright Architectural LED Troffer is ideal for commercial and institutional environments.

DETAILS

Model Number: 14065

2x4 W 23.78" x **L** 47.71" x **Dp** 3.62"

Construction: High reflectance optical engine delivers main beam focus

Lens: Linear ribbed frosted acrylic lens overlay

ADDITIONAL FEATURES

Voltage: 120-277 UNV

Dimming: 0-10V


CRI: 85

Power Factor: >0.95

THD: <10%

Operating Temp: -4°F-122°F

Life: L70 - 152,000 Hrs

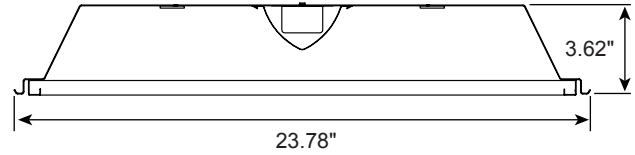

OPTIONS

5 Channel Color Tuning:

- Full spectrum color tuning
- All white color temperatures (1650K-8000K)
- Bluetooth app controlled: Lumenetix
- Gamut control for unlimited control and customization using the Saturation and Hue controls
- In-fixture component

Lutron Vive:

Wireless lighting control solution for new and existing commercial buildings, combining a variety of lighting control strategies with controls and sensors to maximize efficiency and system flexibility and reduce energy consumption by 60% or more.

ORDERING INFORMATION Example: (14065-25-35)

Model	Wattage Lumens	Color Temperature	Options
14065 Suspended	25 25 Watts 3500 Lumens	35 3500K	EM Emergency
	34 34 Watts 4280 Lumens	40 4000K	90 90+ CRI
	46 46 Watts 5800 Lumens	3W 3 Channel Tunable White	LV1 Lutron Vive System Enabled ¹
		5W 5 Channel Color Tuning	0-10V Driver

