

FIXTURE SPECIFICATIONS

INTENDED USE

The **Continuum I Architectural LED Recessed Trimless Fixture** features a customizable design and color changing capabilities. The Continuum is an ideal option for interiors seeking a uniquely modern aesthetic.

Custom design available upon request.

PRODUCT FAMILY

- 14100-2** | Continuum II
- 14100-4** | Continuum IV
- 14100-6** | Continuum VI

THIS PRODUCT IS ONLY TO BE INSTALLED BY A QUALIFIED TECHNICIAN IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.

FEATURES

- Construction:** Durable, Military Grade Aluminum
- Field Cuttable
- Installs Within Drywall Depth
- Can Be Installed in Any Drywall Thickness
- Home Run Required at Every 16'
- LED Driver:** Remote Transformer is Provided
- Beam Angle:** 120°
- Lens:** Glare-Free, Frosted
- Finish:** Matte White
- Voltage:** 24V DC Constant Voltage
- Wattage:** 6W/FT
- Lumens:** *Standard:* 500 lms/FT
- Color Changing:* 380 lms (White) | 185 lms (RGB)
- Life:** 50,000 Hours
- Warranty:** 5 Years
- Listings:** cUL Listed
- Title 24 JA8 Certified
- IP65 Rating on LED Component Available
- Channel Can Be Used in Wet Location Upon Use of Silicone Sealant*



ORDERING INFORMATION Example: (14100-1)

Customization: Please draw your preferred design on the last page with dimensions in Imperial (US) System (e.g. inches & feet)

FIXTURE

Model	Plane X	Plane Y	Plane Z	Square	Rectangle	Color Temp	Driver	Options
14100-1	48X 48"	48Y 48"	48Z 48"	48x48 48"x48"	48x96 48"x96"	<i>Standard</i> 27K 2700K	MLV (120V / 277V) Magnetic Low Voltage HMLV (120V / 277V) High Performance Magnetic Low Voltage LUT1 (120V) Lutron 1% Dimming LUT01 (120V) Lutron .1% Dimming 010 (120V) 0-10V Dimming TRIAC (120V) TRIAC Electronic Dimming RGBCV² (120V) Hardwire Constant Voltage	IP65 Wet Location Rated
	96X 96"	96Y 96"	96Z 96"	96x96 96"x96"	X Custom Rectangle	30K 3000K 40K 4000K 50K 5000K		
	X Custom Length	Y Custom Length	Z Custom Length	X Custom Square	<i>RGB-W¹</i> RGB27K 2700K RGB30K 3000K RGB40K 4000K RGB50K 5000K			

RGB-W WALL CONTROLLER²

Model	Finish
RGB-WC	BK Black WH White

RGB-W DMX Decoder^{2,3}

Decoder	No. of Zones
RGB-DEC DMX512 Decoder	/10 Zones

¹RGB DMX Wall Controller & Decoder Required (See p.3)

²Only Required for RGB Color Changing Models

³One Decoder Required per Zone

STANDARD DIMMABLE POWER SUPPLIES

MAGNETIC LOW VOLTAGE (MLV)




Class 2

TRDM-20W-24V	5.6" x 2" x 2.14"
TRDM-40W-24V	5.6" x 2" x 2.14"
TRDM-60W-24V	6.5" x 2.2" x 2.5"
TRDM-100W-24V	6.5" x 2.2" x 2.5"
TRDM-192W-24V	7" x 7" x 3.2"
TRDM-288W-24V	7" x 7" x 3.2"

Non-Class 2

TRDM-150W-24V	9.8" x 3" x 3"
TRDM-200W-24V	9.8" x 3" x 3"
TRDM-300W-24V	9.8" x 4.2" x 3.5"

*Available in 120V or 277V




HIGH PERFORMANCE MLV



Class 2

TRDH-48W-24V	11.25" x 3.37" x 3.25"
TRDH-96W-24V	11.25" x 3.37" x 3.25"
TRDH-288W-24V	14.25" x 8.43" x 4.43"

*Available in 120V or 277V

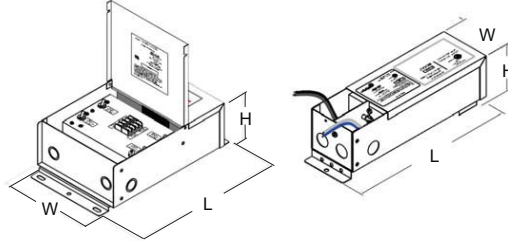


LUTRON 1% DIMMING



Class 2

2-Wire	LTEA4U1UKL-CV240	4.0" x 1.5" x 4.0"
3-Wire	L3DA4U1UKL-CV240	4.0" x 1.5" x 4.0"

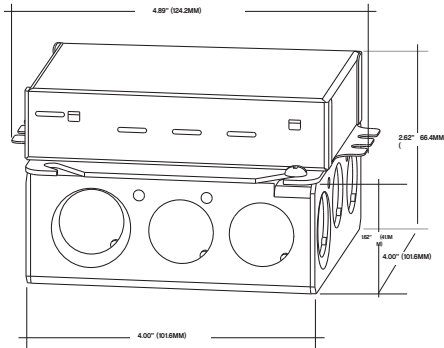


LUTRON .1% DIMMING



Class 2

TRDE-96W-24V-ECO	10.5" x 3" x 2"
------------------	-----------------




0-10V DIMMING (with JUNCTION BOX)



Class 2

TRDE-100W-24V-010-JB	12.32" x 1.77" x 1.67"
----------------------	------------------------

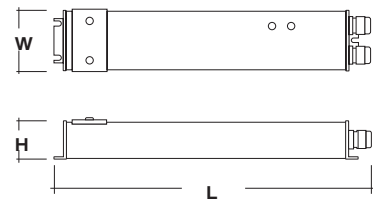

TRIAC DIMMING ELECTRONIC




Class 2

TRDT-20W-24V	6.1" x 2.12" x .79"
TRDT-40W-24V	7.0" x 2.4" x .95"
TRDT-60W-24V	7.1" x 2.36" x 1.38"
TRDT-96W-24V-JB	9.06" x 2.76" x 1.82"

Non-Class 2

TRDT-150W-24V-JB	8.92" x 3" x 1.85"
TRDT-200W-24V-JB	8.92" x 3" x 1.85"

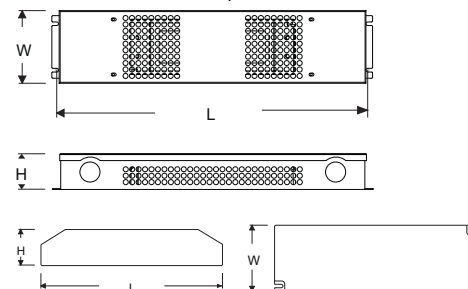

COLOR CHANGING NON-DIMMABLE POWER SUPPLIES


HARDWIRE CONSTANT VOLTAGE


Class 2

TRHW-10W-24V	2.55" x 1.37" x .90"
TRHW-20W-24V	4.64" x 1.38" x 1.2"
TRHW-35W-24V	5.83" x 1.57" x 1.18"
TRHW-60W-24V	6.38" x 1.65" x 1.18"

Non-Class 2

TRHW-100W-24V	7.44" x 2.4" x 1.45"
TRHW-150W-24V	8.75" x 2.68" x 1.53"
TRHW-200W-24V	9.62" x 2.68" x 1.53"
TRHW-300W-24V	9.92" x 3.55" x 1.75"

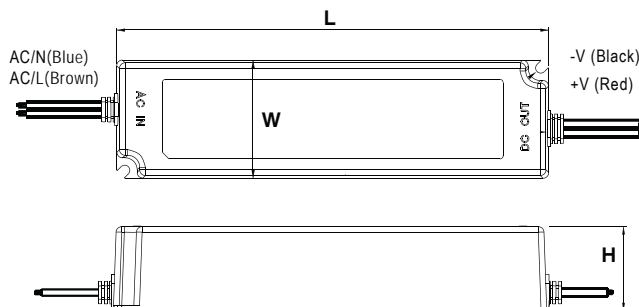

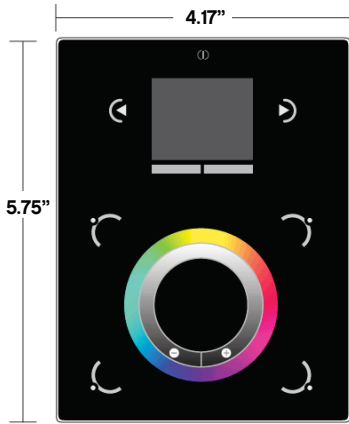

CONTROLLER SPECIFICATIONS

INTENDED USE

Control lighting, color temperature, and dimming remotely with a single wall unit through network communication

FEATURES

Channels: 1024 DMX
Control: Up to 340 RGB Fixtures
Zones: Multi-room Control with 10 Zones, 500 Scenes

SPECIFICATIONS

Construction: Touch Sensitive Buttons and Color Wheel for Accurate Color Selection
Output Protocol: DMX512 (X2)
Connections: USB / Ethernet / RS232 Clock / 8 Dry Contact Ports
 5V Output Relay
Mounting: Single or Double Gang Socket
Memory: microSD
Voltage: 6V DC / 0.6A
Temperature: 14°F - 113°F
Compatibility: MAC / PC / Android / iOS
Software: Nicolaudie (Included)
Standards: EC / EMC / ROHS / ETL



DECODER SPECIFICATIONS

DESCRIPTION

Constant Voltage DMX512 Decoder with Digital Display
 One Decoder is required per zone.

SPECIFICATIONS

Input Voltage: 12-36V DC
Input Signal: DMX512
Output Voltage: 12-36V DC
Output PWM Channels: 3 or 4 Selectable
Output Amps: 5A per Channel
Output Wattage: 60W (12V) | 120W (24V)
Operating Temperature: -4°F - 122°F
Data Ports: RJ45
Compatibility: RGB & RGB+W Systems
 12V DC and 24V DC Systems


INSTALLATION

Make sure the controller has the proper voltage and wattage for the intended job.
 Check wiring to make sure they match the diagram.

Select a suitable and proper location to mount the DMX decoder.
 Consider distance of transformer and LED fixture from controller to determine appropriate wire.



THIS PRODUCT IS ONLY TO BE INSTALLED BY A QUALIFIED TECHNICIAN IN ACCORDANCE WITH NATIONAL AND LOCAL ELECTRICAL CODES.

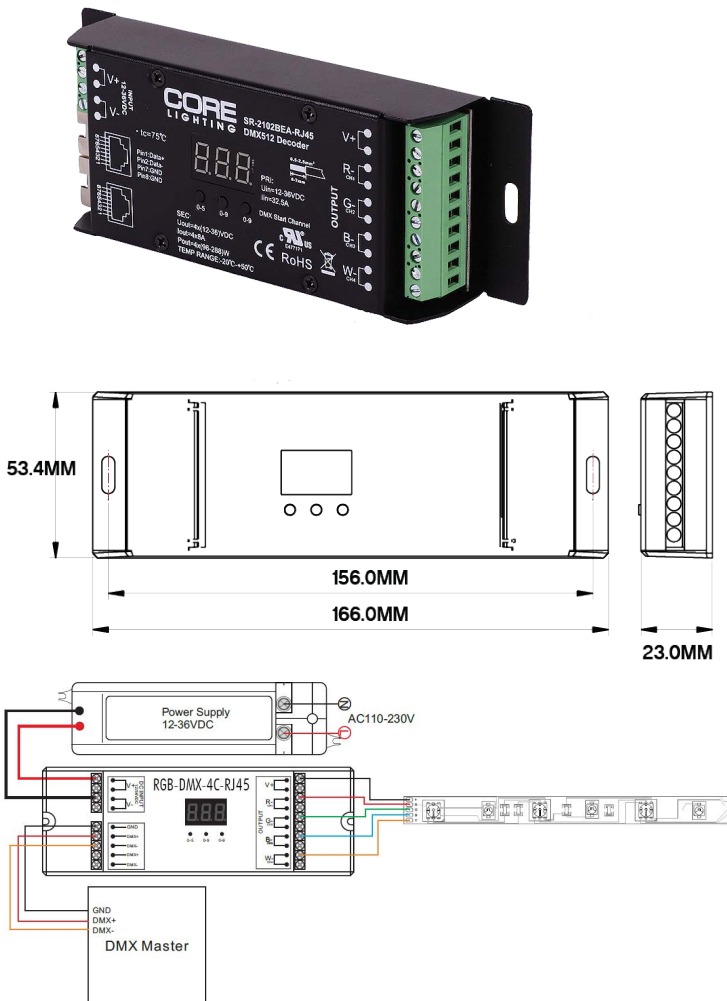



CUSTOMIZATION

Please provide sketches illustrating desired pattern and overall dimensions including corner dimensions and locations required.