


1/2" Nom (.88 in Actual)
EKO In Both Ends and Back

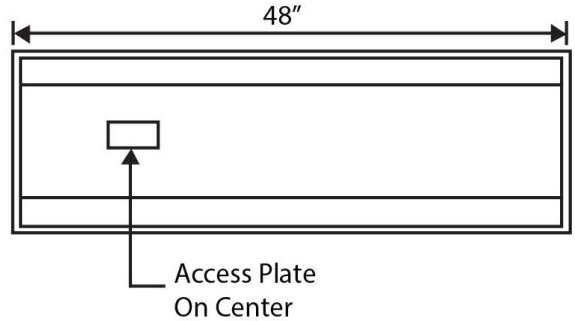

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Basic Architectural LED Recessed Troffer** fixtures bring clean lines and clear light to commercial LED or residential office lighting interiors. Our sleek, stylish fixtures offer highly effective and efficient lighting solutions for hotels, offices, retail outlets, restaurants, and more.

PRODUCT FAMILY

14114 | 2x2

14115 | 1x4

FEATURES

- Construction:** Die-formed and embossed code 22 gauge steel housing
- Access plate to simplify installation
- Finish:** High reflectance baked white enamel
- Lens:** Clear 0.10 thick A12 Acrylic
- Voltage:** 120- 277 UNV
- Support:** Recessed Inverted T-Bar Ceilings. Grid
- Mount Life:** 50,000 Hrs
- Operating Temperature:** -4°F~122°F
- Lamp Included
- Listings:** UL Listed



ORDERING INFORMATION Example: (14116-35W4100-30K-DM10-EM)

Model	Wattage & Lumens	Color Temp	Dimming	Options
14116	35W3650 35W 3650 lumens	30K 3000K	ND Non-Dimming	EM Emergency Backup Battery
	45W5500 45W 5500 lumens	35K 3500K	DM10² 5-Wire 0-10V Dimming (100%-10%)	
	56W6050 56W 6050 lumens	40K 4000K	DM1² 5-Wire 0-10V Dimming (100%-1%)	
	72W8750 72W 8750 lumens	50K 5000K		