

FIXTURE SPECIFICATIONS

INTENDED USE

The **Mirage Architectural LED New Construction Frame Recessed Down Light** delivers energy efficient and clear light to commercial, hospitality and residential interior lighting applications. Our modern profiles and stylish designs offer excellent direct lighting and exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

- 4 Inch Frame-In
- 6 Inch Frame-In
- 8 Inch Frame-In

FEATURES


- Construction:**
 - Architectural* - Heavy Gauge Die Formed Galvanized Steel Mounting Frame / Open Conical Shape Reflector
 - Commercial* - Galvanized Steel Plaster Frame
- Mounting:** Non-insulated ceilings or where insulation can be kept 3" from all side of housing
 - Architectural* - Vertically Adjustable Brackets for conduit or C channel
 - Commercial* - Bar Hanger for T-Bar
- Ceiling Thickness:** 1-1/2"
- Junction Box:** Galvanized Steel with (7) 1/2" Knockouts, (4) Pryouts, Snap-On cover
- Protections:** Thermal, Surge, Output Open Load, Over-Current and Short-Circuit, and Over-Temperature with Auto Recovery
- Electrical:** Interfaces with Fire Alarm Panel or Security System
- Voltage:** 120-277V
- Dimming:** Universal Dimming Standard (120/277V. Works with most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V dimmers.)
- CRI:** 90+
- Power Factor:** > .9
- Life:** 50,000 Hours L70
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** UL/CUL Listed for Damp Location with Covered Ceiling
UL/CUL Wet Location Listed



Adjustable Architectural Frame



Commercial Frame-In

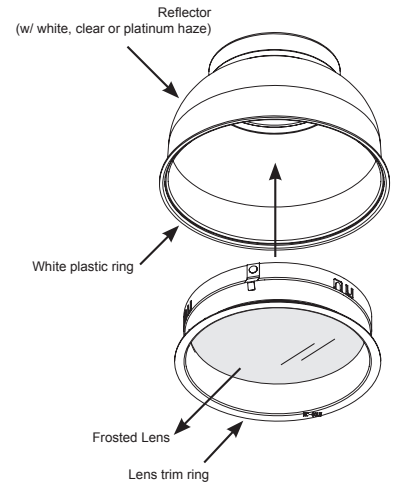

ORDERING INFORMATION Example: (12125-4-60W-30K-WH-010-AC48-FCJS-010-EM5)



Model	Lumens	Color Temp	Reflector ²	Lens	Beam Spread	Dimming Driver
14130-4A 4" Architectural Frame	16l 16 watts 1458 lms 25l 25 watts 2201 lms	<i>Residential</i> 30K 3000K <i>Commercial</i> 35K 3500K 40K 4000K <i>Industrial</i> 50K 5000K	WH ^{Standard} White CL Clear PLH Platinum Haze	NL No Lens FR White Smooth Splay w/ Frosted Lens	WD ^{Standard} Wide NR Narrow MD Medium WW Wall Wash	UNI ^{Standard} Universal (Triac / ELV / 0-10V) E5 Lutron EcoSystem™ 5-Series 5% E1 Lutron EcoSystem™ Hi-Lume 1%
14130-4C 4" Commercial Frame	38l 38 watts 3035 lms 50l 50 watts 3904 lms 70l ¹ 70 watts 5920 lms 100W ¹ 100 watts 7070 lms					
14130-6A 6" Architectural Frame						
14130-6C 6" Commercial Frame						
14130-8A 8" Architectural Frame						
14130-8C 8" Commercial Frame						
		Options				
		EM7 7W Emergency Backup				
		EM10 10W Emergency Backup				
		EM15 15W Emergency Backup				
		EM25 25W Emergency Backup				

¹Only Available for 6" & 8"
²with White Plastic Ring