


Project Name: _____ Type: _____ Quantity: _____

INTENDED USE


Lighting for accent, display, toe-kick, wall wash, coves and under cabinets with a high lumen output and integral driver is easier with our architectural-grade lightbar, which includes a color temperature switch. The product, which may also be used for uplighting, suits residential and commercial purposes. Our plug-and-play LED lightbar is dry and damp-listed. The dimmable lighting operates with a run length that's linkable up to 400 watts. The product's Color Rendering Index (CRI) is 90-plus.

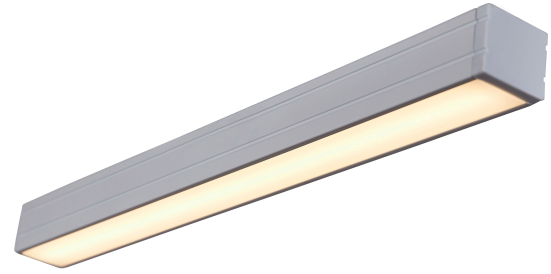


INTENDED USE

- Mounting:** Product comes with 90° swivel bracket, 1 mini coupling & clips included
- Finish:** White is standard. Bronze is available
- Dimensions:** 1.1" width x 0.94" height
- Voltage:** 120V
- Lumens:** 750 lumens per foot
- Wattage:** 10W per foot
- Color Temperature:** 3000K/3500K/4000K selectable switch
- Dimming:** ELV / TRIAC
- Max Run Length:** Linkable up to 400W. Includes seamless connector.
- Operating Temperature:** -10°C ~ 40°C
- CRI:** 90+
- Life:** 50,000
- Warranty:** 5 years carefree for parts & components. (Labor not included)
- Listings:** cETLus, Title 24/JA8, Energy Star

Under Cabinet Lighting Application

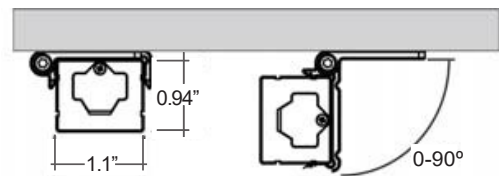

Cove Lighting Application

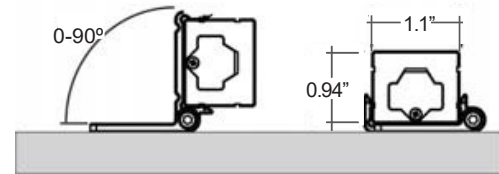

| MODEL | 14220-12 | 14220-16 | 14220-24 | 14220-32 |
|--------|----------|----------|----------|----------|
| LENGTH | 12" | 16" | 24" | 32" |
| WATTS | 10 W | 13 W | 20 W | 26 W |
| LUMENS | 750lms | 950lms | 1500lms | 2000lms |



ORDERING INFORMATION Example: (14220-24-BR-PF)

| Model | Length | Finish | Accessories |
|--------------|--|---|---|
| 14220 | 12 12 Inches 16 16 Inches 24 24 Inches 32 32 Inches CS Custom Length <i>Specify Length in Inches</i> | WH <small>Standard</small> White BR Bronze | JB Junction Box ¹ HC 72" Hardwire Connector PF 72" Power Feed Cable ICxx ² Interlink Cable |

¹ Junction Box Dimensions: 6-1/4" x 3-5/8" x 1"
² Please specify length, see pg. 2

ACCESSORIES

JUNCTION BOX | [Direct Wire Junction Box With Switch](#)
Dimensions: 6-1/4" x 3-5/8" x 1"



HARDWIRE CONNECTOR | [Hardware connector for LBR Series](#)

72" Cable



POWER FEED CABLE | [AC Direct Plug-in Cable](#)

72" Cable



INTERLINK CABLE | [Allows LBR fixtures to link Together](#)

-6 6" Interlink Cable

-12 12" Interlink Cable

-24 24" Interlink Cable

-72 72" Interlink Cable



COLOR TEMPERATURE GUIDE

