
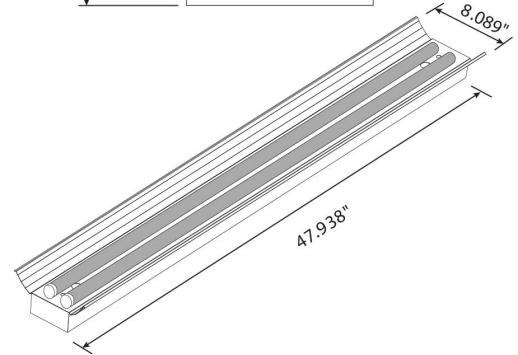


SHOP NOW >

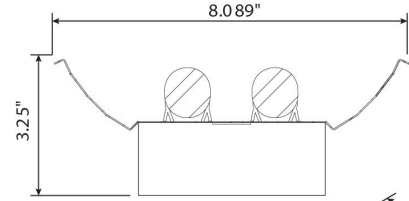

FIXTURE SPECIFICATIONS

INTENDED USE

The **Infinum Architectural Commercial LED Low Bay** is designed to provide high lumen output, exceptional color rendering, and ultra long life. The Infinum is an ideal option for replacing HID and fluorescent high bay systems and for commercial and industrial interiors.

FEATURES

- Construction:** 22 Gauge Pre-Painted Steel with Air Vents to Maximize Performance, Reliability, and Life and Back Access Plate for Fast and Hassle-Free Wiring
- Lens:** Glare-Free, Diffused
- Voltage:** 120-277 VAC
- CRI:** 82+
- Life:** 80,000 Hours+ (L70)
- THD:** <10%
- Power Factor:** >0.99
- Operating Temperature:** -4°F - 122°F
- Warranty:** 10 Years on All Non-24/7 Operation
7 Years on 24/7 Operation
- Listings:** cULus Listed
Damp Location Suitable
DLC Certified at >145 Lumens/Watt



Alcon Lighting 15222-2 Infinum Low Bay Architectural Commercial LED 2-Lamp Low Bay Direct Down Light Fixtures

ORDERING INFORMATION Example: (15222-2-36W-40K-010-PN-WH6-EM8-REM)

Model	Lamps, Wattage, & Lumens	Color Temp	Mounting	Cord Set	Options
15222-2	2-36W 2 Lamps 36 watts 4600 lms	30K 3000K 35K 3500K 40K 4000K 50K 5000K	PN Pendant JC Jack Chain VH V-Hanger	WH6 6 FT 3-Wire White WH12 12 FT 3-Wire White	EMI Internal Emergency Backup OS Occupancy Sensor REM Dimming Sensor Remote
	2-44W 2 Lamps 44 watts 5500 lms				
	4-60W 2 Lamps 60 watts 7800 lms				