

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The specification grade **Perimeter Recessed Cove Light Fixture** creates a wash of ambient and vertical illumination at the transition between the wall and the ceiling plane. For use in offices, hallways, conference rooms, medical facilities, and more. Available in 2', 4', 6' & 8' sections.

PRODUCT FAMILY

15233-2 | W 4" x H 2"

15233-4 | W 4" x H 4"

15233-6 | W 4" x H 6"

FEATURES

Construction: Steel sheet metal galvanized and powder coated body.

Lens: Glare Free Snap In Frosted Acrylic for Even Distribution

Mounting: Threaded Rod for T-Bar installation is Standard.

Dimming: 0-10V or TRIAC/ELV Driver Available

Voltage: 120-277V (0-10V Driver) or 120V (TRIAC/ELV)



CRI: 80

Power Factor: >0.90

Life: 50,000 Hours (L70)

Warranty: 1 Year Carefree for Parts & Components (Labor Not Included)

Listings: ETL Listed, Suitable for Damp & Dry Locations

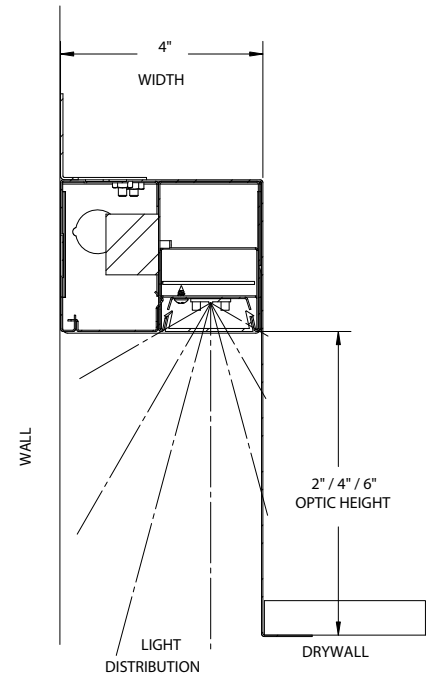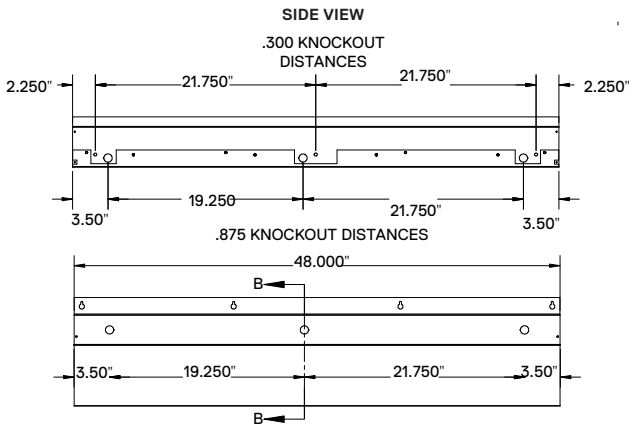

ORDERING INFORMATION Example: (15233-4-4-30K-80-T-010)

Model	Optic Size	Length Wattage Lumens	Color Temp	CRI	Mounting	Driver	Options
15233	2 2" Height	2 2FT 16 Watts 1600 Lumens	Residential 30K 3000K	80 80+ Standard 90 90+	T T-Bar Standard D Drywall	010 0-10V Driver T/E TRIAC/ELV Driver	EM 10 Watt Emergency Battery
	4 4" Height	4 4FT 32 Watts 3200 Lumens	Commercial 35K 3500K				
	6 6" Height	6 6FT 48 Watts 4800 Lumens	40K 4000K				
	8 8" Height	8 8FT 64 Watts 6400 Lumens	Industrial 50K 5000K				