

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The **Talos Architectural LED Outdoor Canopy Light Fixture** is built to replace pulse start metal halide fixtures up to 250W and features a slim, low profile design. The Talos is an ideal and attractive lighting solution for gas stations, parking garages, security lighting, and other outdoor applications.

FEATURES

Construction: ADC 12 die-cast aluminum corrosion resistant

Lens: Prismatic polycarbonate lens

Finish: UV resistant bronze powder coat

Voltage: 120~277V

CRI: 80+

Color Temperature: 5000K


Dimming: 0-10V, dimmable to 10%

Min. Operating Temperature: -40°F (-40°C)

Power Factor: >0.9

Life: 50,000 hours

Listings: cULus, DLC premium, LM79 rated, IP65, RoHS compliant

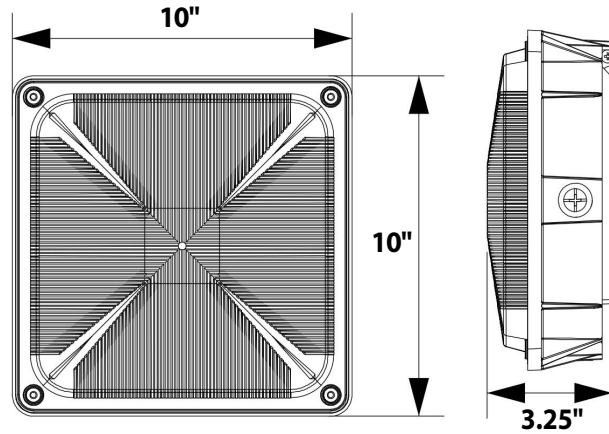

ORDERING INFORMATION Example: (16003-60)

Model	Wattage Lumens	Options
16003	60 60 Watts 7532 Lumens 75 75 Watts 9602 Lumens	MS Motion Sensor Photocell