

## FIXTURE SPECIFICATIONS

### INTENDED USE

The specification grade **Continuum Modular Architectural LED Magnetic Lighting System**. The Switch system is low voltage (24VDC) LED-lighting, offering tremendous flexibility in terms of placement and aesthetics. The system consists of three basic elements: a track, a transformer and lighting components. The tracks, in which the interchangeable lighting components can be easily positioned and exchanged by means of magnets, can be mounted in four different ways: Recessed, Trimless Recessed, Surface Mounted and Pendant."

### PRODUCT FAMILY


- 15200-S** | Surface
- 15200-RF** | Recessed Flanged
- 15200-RT** | Recessed Trimless
- 15200-P** | Pendant

### AVAILABLE LENGTHS

- 3FT - L 36" x W 1.46" x H 2.60"**
- 6FT - L 72" x W 1.46" x H 2.60"**
- 8FT - L 96" x W 1.46" x H 2.60"**
- Continuous Run** | Consult Factory

### FEATURES

- Construction:** Aluminum, paint-coated
- Continuous Row:** Full ability to tandem mount for continuous run applications
- Custom Design:** Magnetic module components
- Voltage:** 24VDC (remote LED driver to be supplied by factory)
- Finish:** Black
- Color Temperature:** 3000K (Residential, Hospitality, Retail)
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** cETL (LED Driver Only)

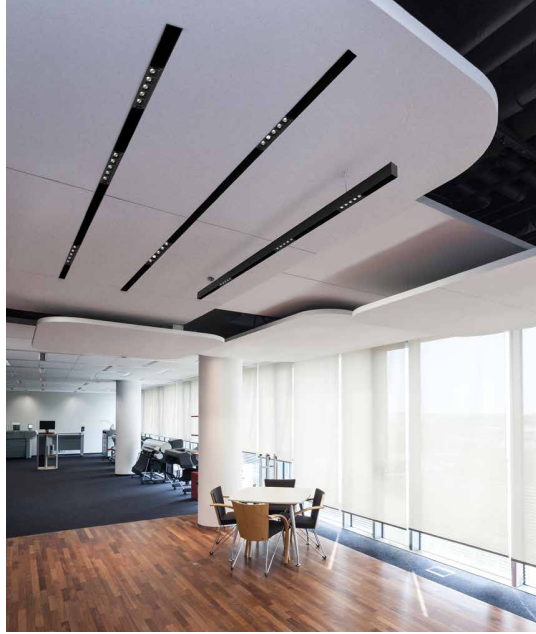

## Step 1: CHANNEL ORDERING INFORMATION Example: (15100-RT-S-5-8)

Model	Channel	Shape	Single Run
15100 Modular	<b>RT</b> Recessed Trimless	<b>S</b> Single Run	<b>3</b> - 3ft. <b>6</b> - 6ft. <b>8</b> - 8ft.
	<b>RF</b> Recessed Flanged	<b>CR</b> Continuous Run	<b>Cont. Run</b> X - Specify in ft.
	<b>P</b> Pendant	<b>RC</b> Rectangle	<b>Rectangle</b> <b>w</b>
	<b>S</b> Surface	<b>SQ</b> Square	<b>L</b>
		<b>CU</b> Custom	




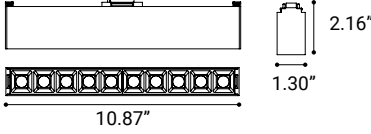



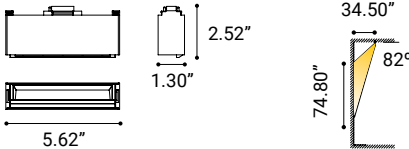

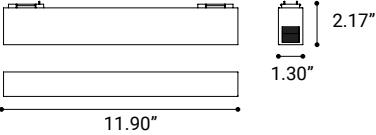










LENGTH      WIDTH

LENGTH      WIDTH


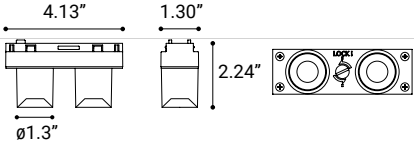

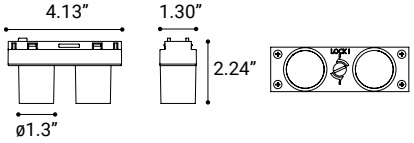

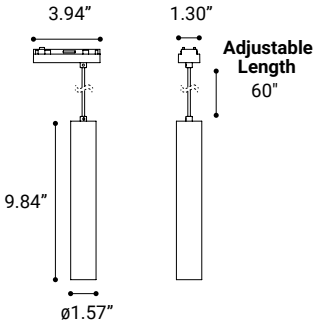
**Custom**

**DRAW YOUR CUSTOM SHAPE HERE**  
Or send us your idea to [rfq@alconlighting.com](mailto:rfq@alconlighting.com)

## Step 2: COMPONENT ORDERING INFORMATION Example: (MSF3-12 / LLF9 / LA320)

QTY	Type	Size	Wattage   Lumens	CRI	Beam Spread	Model #
		Multi-Cell Linear 5-Cells 	11 Watts   1000 Lumens	90+	30°	<b>MCL-5</b>
		Multi-Cell Linear 10-Cells 	22 Watts   2000 Lumens	90+	30°	<b>MLC-10</b>
		Multi-Cell Linear 15-Cells 	33 Watts   3000 Lumens	90+	30°	<b>MLC-15</b>
		Wall Wash Linear 	11 Watts   491 Lumens	90+	82°	<b>WWL</b>
		12" Linear 	9.2 Watts   320 Lumens	80+	155°	<b>L-12</b>
		24" Linear 	18.4 Watts   729 Lumens	80+	155°	<b>L-24</b>
		36" Linear 	27.5 Watts   975 Lumens	80+	155°	<b>L-36</b>
		Multi-Cell Adjustable 5-Cells 	11 Watts   1000 Lumens	90+	30°	<b>MCA-5</b>
		1.5" Adjustable Spot Light 	6.4 Watts   626 Lumens	90+	20°	<b>ASP-1</b>
		2.5" Adjustable Spot Light 	15 Watts   1000 Lumens	90+	20°	<b>ASP-2</b>












**Step 2: COMPONENT ORDERING INFORMATION** Example: (MSF3-12 / LLF9 / LA320)

QTY	Type	Size	Wattage   Lumens	CRI	Beam Spread	Model #
	35° Dual Head Downlight		5.3 Watts   399 Lumens	90+	35°	<b>DHD-35</b>
	60° Dual Head Downlight		5.3 Watts   300 Lumens	90+	60°	<b>DHD-60</b>
	Adjustable Suspended Cylinder		6.4 Watts   626 Lumens	90+	20°	<b>ASC</b>

**Step 3: COMPLETE ORDERING INFORMATION** Example: (15100-RT-S-S-8 / MSF3-12 / LLF9 / LA320)

Channel \_\_\_\_\_ / Qty - Component 1 \_\_\_\_\_ / Qty - Component 2 \_\_\_\_\_ / Qty - Component 3 \_\_\_\_\_ / etc.

### Step 3: ACCESSORIES ORDERING INFORMATION Example: ()

	Type	Pendant	Surface Mount	Trim Recessed	Trimless Recessed	SKU
	15361-1	✓				
	15362-1		✓	✓	✓	
	15363-1	✓				
	15364-1		✓	✓	✓	
	15368-1	✓	✓		✓	
	15369-01			✓		
	15370-01	✓	✓		✓	
	15371-01			✓		
	15795-015		✓			
	15796-015	✓				
	15797-012	✓				

# Step 4: CORNER CONNECTOR ORDERING INFORMATION Example: ()

QTY	Type	Size	SKU
	Vertical Corner L-Shaped Connector for Surface-to-Wall Surface Mount/Pendant		
	Horizontal Corner L-Shaped Connector for Ceiling Surface Mount/Pendant		
	Vertical Corner L-Shaped Connector for Surface-to-Wall Trimmed Recessed		
	Horizontal Corner L-Shaped Connector for Ceiling Trimmed Recessed		
	Vertical Corner L-Shaped Connector for Surface-to-Wall Trimless Recessed		
	Horizontal Corner L-Shaped Connector for Ceiling Trimless Recessed		