

SPECIFICATION SHEET

PRODUCT # : ALC-CL-530B-GM

• Directional Lights

• Cast Brass

Fixture Specifications:

Housing & Shroud: Corrosion Resistant Cast Brass.
Shroud is adjustable and extendable.

Finish: **GM- Gun Metal.** Natural toning process.
GM finish will vary due to artistic process.

Lens: Clear and heat resistant tempered flat glass.

Socket: Top grade fixed ceramic bi-pin socket, with lamp retention clip to securely hold lamp in place.

Lamp: 2.5W 12V 3000K 200LM Dimmable G4
20,000 Hours

Wiring: Fixture is prewired with a 5-ft 18-2 SPT2-W direct burial cord. Wire connector available separately. Universal connector CX-839 or gel filled wire nut CX-854 may be ordered


Gasket: Silicone gasket for water tight sealing.

Knuckle: Adjustable cast brass knuckle with thumb screw and 1/2" NPT threaded male hub on bottom.

Mounting Spike: Standard injection molded spike with 1/2" NPT threaded female hub.

Electrical Notes: A remote 12V transformer required, may be ordered separately. Voltage range for 12V halogen lamps are 11V-12.5V
Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing against manufacturer's defects.

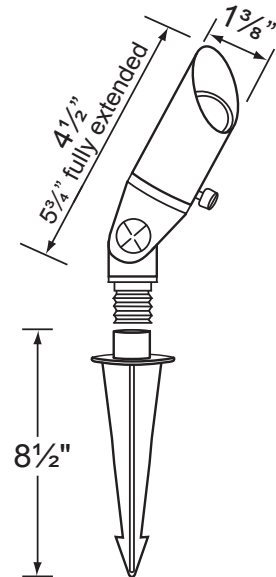

MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



Mounting Stems

- CX-682B-GM 6"
- CX-683B-GM 12"
- CX-684B-GM 18"
- CX-685B-GM 24"
- GM - Gun Metal**



Mounting Canopy

- CX-709B-GM
- GM- Gun Metal**



Mounting Pedestal

- CX-603-BK
- BK - Black**

JOB INFORMATION

TYPE: _____ DATE: _____

JOB NAME & ADDRESS: _____

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: