SPECIFICATION SHEET

Shop Now

Project Name: _____ Type: ____ Quantity: ____

INTENDED USE

This low-profile, narrow decorative wrap fixture is ideal for surface mounting applications. The housing accommodates lift-and-shift lenses and frames, or frames that fit flush with the ceiling, providing versatile installation options. Built as a high-quality, energy-efficient LED fixture, it's perfect for residential and commercial settings, including kitchens, dens, living rooms, bathrooms, offices, and recreation rooms.



Construction: Die-formed heavy-gauge steel body with embossed housing for enhanced rigidity and smooth, hemmed edges for safe handling

Lens: White polyester finish with 93% reflectivity and a lift-and-shift puff lens for optimal LED diffusion. Made from high-impact, durable DR/acrylic polymer blend

Wattage: 33W

Lumen Output: 4650 lms

Mounting: Surface Voltage: 120-277V Driver: 0-10V


Listings: ETL and cETL Listed, Made in USA,

and Damp location rated.

Warranty: 5 years carefree for parts & components (Labor not included).





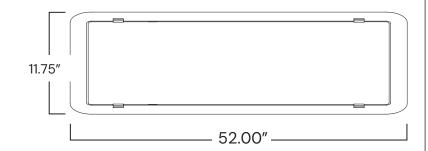













ORDERING INFORMATION Example:

Model	Color Temperature	Options
11109-12	30 3000K 35 3500K 40 4000K 50 5000K	EM12 1200 Lumen Emergency Back-up Battery IFC Integral fixture controller (RF with daylight and occupancy sensing)



COMPATIBLE DIMMERS

	LIGHTING	%LUTRON	LEVITON _®
0-10 V	<u>2100</u> 2101	Diva DVTV	IP-710-DL
0 10 1	2102		

