


Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

This commercial-grade linear surface-mounted ceiling light featuring wattage and color temperature switching provides high-CRI LED light for commercial, industrial, institutional and other architectural applications. Our 120-277V light strip is suitable for damp locations. The 11163 is ideal for stairwells, lobbies, garages, corridors and hallways.

FEATURES

- Construction:** Die-formed steel channel
- Lens:** Frosted acrylic
- Color Temperature Switch:** Field selectable switching of color temperatures from 3500K, 4000K and 5000K Color temps
- Wattage Switch:** Field selectable switching of wattage
- Electrical:** Class 1 or Class 2 circuit
- Voltage:** 120-277V (50/60 Hz)
- Dimming:** 0-10V to 10%
- CRI:** 80
- Life:** 60,000 Hours (L70)
- Power Factor:** +0.90
- Starting Temperature:** -4°F - 122°F
- THD:** <20
- Warranty:** 5 Years
- Listings:** cULus Listed, DLC Listed, Labeled Suitable for Damp Locations



Size	LED Watts	Lumen Output	Color Temp	Lumen Efficiency
2FT	15W, 20W, 25W	1950lm, 2600lm, 3250lm	3500K	130 lm/W
4FT	25W, 30W, 40W	3250lm, 3900lm, 5200lm		
8FT	55W, 60W, 65W	7150lm, 7800lm, 8450lm		
2FT	15W, 20W, 25W	1965lm, 2620lm, 3275lm	4000K	131 lm/W
4FT	25W, 30W, 40W	3275lm, 3930lm, 5240lm		
8FT	55W, 60W, 65W	7205lm, 7860lm, 8515lm		
2FT	15W, 20W, 25W	1980lm, 2640lm, 3300lm	5000K	132 lm/W
4FT	25W, 30W, 40W	3300lm, 3960lm, 5280lm		
8FT	55W, 60W, 65W	7260lm, 7920lm, 8580lm		




ORDERING INFORMATION Example: [\(11163-P-8-55W-OS-EM8\)](#)

Model	Mounting	Finish	Length Wattage	Options
11163	S Surface	WH White BK Black	2-15W 2 FT 15W, 20W, 25W	OS Internal Occupancy Sensor w/ Daylight Harvesting DD External Daylight Dimming Photosensor EM8 8W Emergency Backup Battery EM15 15W Emergency Backup Battery EM20 20W Emergency Backup Battery EM25 25W Emergency Backup Battery WG Wireguard (White)
	AC4 4' Adjustable Aircraft Cable		4-25W 4 FT 25W, 30W, 40W	
	AC8 8' Adjustable Aircraft Cable	8-55W 8 FT 55W, 60W, 65W		

Alcon Lighting 11163 LED Linear Ceiling Light | Field-Selectable Wattage and Light Color Temperature

LINE DRAWINGS

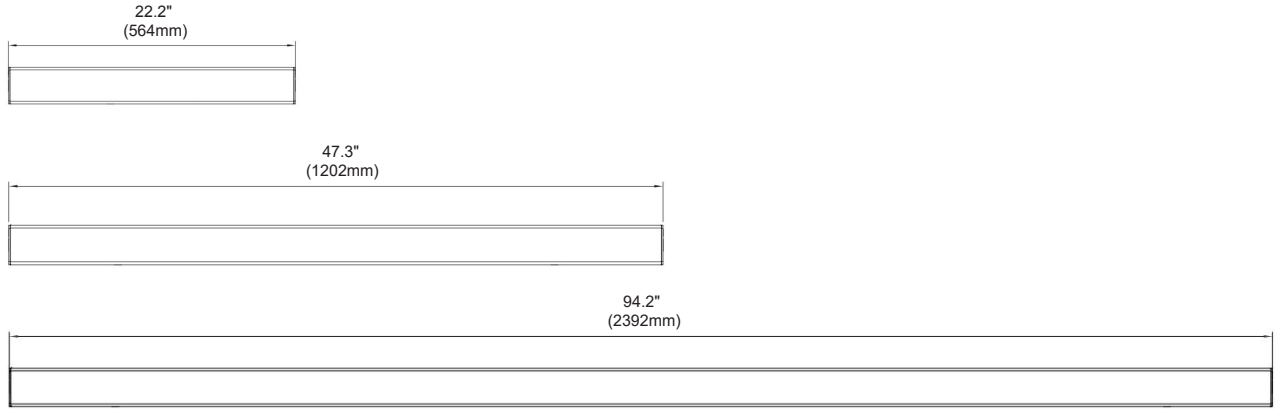

COLOR TEMPERATURE GUIDE

				
2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	COOL WHITE GLOW	DAYLIGHT GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANTISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
X	X	✓	✓	✓