

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Gasket-enclosed, linear LED lighting rated for wet locations assures ideal illumination for commercial kitchen, garage and warehouse exteriors and interiors. Our low-profile ceiling canopy product affords high quality lighting. Mounting options include stem, chain, swivel-stem and surface. Available in 2-ft, 4-ft and 8-ft standard lengths with an IP69K rating.

FEATURES

Construction: Fully gasket fiberglass upper body with cold-rolled steel white finish reflector.

Mounting: Chain, aircraft cable and surface mounting.

Voltage: 120~277 Vac input range, 50 / 60 Hz

Operating Temperature:

- 4°F (-20°C) ~ 122°F (50°C) (Standard)

- 40°F (-40°C) ~ 122°F (50°C) (with LT option)

- 31°F (-35°C) ~ 140°F (60°C) (with HT option)

Power Factor: +0.9

Efficiency: +85%

Life: +60,000 Hours (L70)

Listings: UL/CUL, IP69K, NSF International certified, NEMA 4X certified, ARRA ARRA and BAA compliant, CEC Compliant EM, Made in the USA

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)



Lens Types:



DIRA Standard



PCC



PCF



ORDERING INFORMATION Example:


| Model | Mount | Distribution | Size Wattage Lumens | Color Temp | CRI | Lens | Driver | Pendant Type | Options |
|----------------------|--------------------|------------------|-------------------------|--------------------------------------|------------|---|------------------------------------|-----------------------------------|--|
| 11174 | S Standard Surface | (Blank) Standard | 2 Foot | 27K ¹ | 8 Standard | DIRA Standard | 010 Standard | V Standard | EM8 |
| | | | 2-18 | 2700K | 80+ CRI | Impact resistant Acrylic, Ribbed Clear Lens | 0-10V 10% Dimming | 10' V-Hook | 8W EM Battery Backup |
| | P Pendant | LP Low Profile | 18 Watts 2548 lum | 30K | 9 | PCC ² | 0101 | AC120 | EM15 |
| | | | 20 Watts 2831 lum | 3000K | 90+ CRI | Polycarbonate smooth clear lens | 010V 1% Dimming | 10FT Aircraft Cable Pendant Mount | 15W EM Battery Backup |
| | | | 2-20 | 35K | | PCF ² | LDE1 | (Blank) Not Required | EM20 |
| | | | 27 Watts 3823 lum | 3500K | | Polycarbonate smooth frosted lens | Ecosystem Hi-Lume 1% | | 20W EM Battery Backup |
| | | | 2-27 | 40K | | | ES566 | | WL-OS |
| | | | 20 Watts 2831 lum | 4000K | | | eldoLED 0-10V SOLOdrive | | Wet location occupancy Sensor |
| | | | 2-36 | 50K | | | BLS | | MW-BI |
| | | | 36 Watts 5097 lum | 5000K | | | Bi-Level Step 40/100% | | Microwave bi-level Occupancy Sensor, adjustable via DIP switch |
| | | | 4 Foot | | | | BLS ^{xxx} | | ELCU-200 |
| | | | 4-36 | | | | Bi-Level Step ^{xxx} /100% | | Fail-to-on Emergency UL924 |
| 36 Watts 5097 lum | | | | TLS | | GLR | | | |
| 4-45 | | | | Tri-Level Step 30/70/100% | | Fast Blow Fuse | | | |
| 45 Watts 6372 lum | | | | TLS ^{xxxx} | | GMF | | | |
| 4-56 | | | | Tri-Level Step ^{xxxx} /100% | | Slow Blow Fuse | | | |
| 56 Watts 7930 lum | | | | | | LT | | | |
| 4-72 | | | | | | Low Temperature (-40°F ~ 122°F) | | | |
| 72 Watts 10196 lum | | | | | | HT | | | |
| | | | | | | High Temperature (-31°F ~ 140°F) | | | |
| | | | | | | AMB | | | |
| | | | | | | Anti-Microbial Coating | | | |

¹ Only available with 90+ CRI


² Only available with standard distribution

Standard

2FT

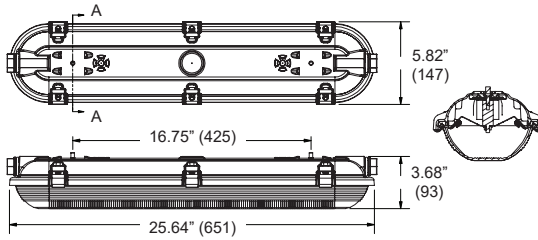


4FT

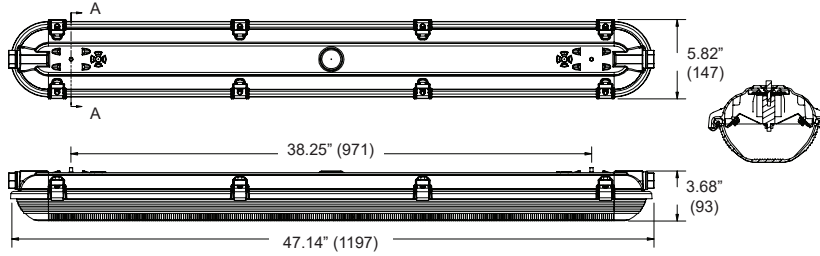


Low Profile

2FT

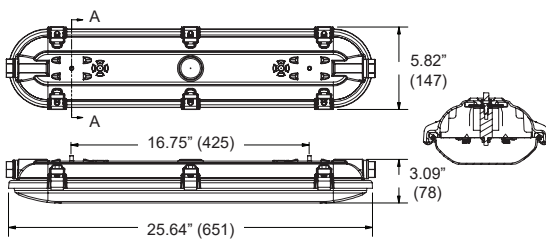

4FT

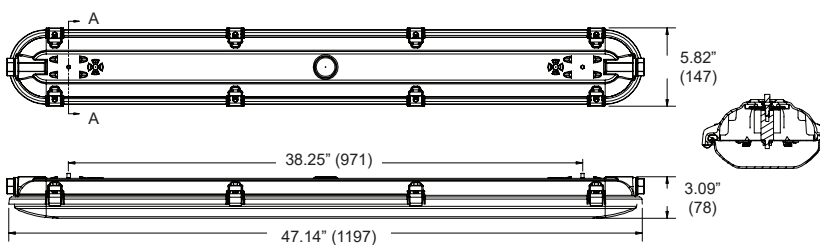

All dimensions are in inches (millimeters).

COMPATIBLE DIMMERS

| | | | |
|---------------|---|--|---|
| |  |  |  |
| 0-10 V | 2100 2101 2102 | Diva DDTV | IP-710-DL |

COLOR TEMPERATURE GUIDE



| | | | | |
|--|---|--|---|--|
| <p>2700K</p> <p>WARM WHITE</p> <p>friendly personal intimate</p> <p>HOMES LIBRARIES RESTAURANTS</p> <p>✓</p> | <p>3000K</p> <p>SOFT WHITE GLOW</p> <p>soft warm pleasing</p> <p>HOMES HOTEL ROOMS LOBBIES RETAIL STORES</p> <p>✓</p> | <p>3500K</p> <p>NEUTRAL GLOW</p> <p>sociable inviting non-threatening</p> <p>EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS</p> <p>✓</p> | <p>4000K</p> <p>COOL WHITE GLOW</p> <p>neat clean efficient</p> <p>OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS</p> <p>✓</p> | <p>5000K</p> <p>DAYLIGHT GLOW</p> <p>bright cool alert</p> <p>GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS</p> <p>✓</p> |
|--|---|--|---|--|