SHOP NOW

Project Name: Type: Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Gasket-enclosed, linear LED lighting rated for wet locations assures ideal illumination for commercial kitchen, garage and warehouse exteriors and interiors. Our low-profile ceiling canopy product affords high quality lighting. Mounting options include stem, chain, swivel-stem and surface. Available in 2-ft, 4-ft and 8-ft standard lengths with an IP69K rating.

FEATURES

Construction: Fully gasket fiberglass upper body with cold-rolled steel white finish reflector.
Mounting: Chain, aircraft cable and surface mounting.
CRI: 80+
Input Voltage: 120/277V, 50/60Hz
Ambient Operating Temperature: -4°F (-20°C) ~ 122°F (50°C) (Standard)
-40°F (-40°C) ~ 122°F (50°C) (with LT option)
-31°F (-35°C) ~ 140°F (60°C) (with HT option)
LED Life: 50,000 Hours
Listings: UL/CUL, IP69K, NSF International certified, NEMA 4X certified, ARRA compliant, CEC Compliant EM, Made in the USA
Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Lens Types:



DIRA Standard

PCC

PCF

ORDERING INFORMATION Example: (11174-S-4-36-27K-DIRA-010-AC120-TR)

Model	Mount	Distribution	Size | Wattage | Lumens	Color Temp	CRI	Lens	LED Driver	Pendant Type	Options
11174	**S** Standard Surface **P** Pendant	**(Blank)** Standard **LP** Low Profile	2 Foot **2-18** 18 Watts | 2548 lum **2-20** 20 Watts | 2831 lum **2-27** 27 Watts | 3823 lum **2-36** 36 Watts | 5097 lum 4 Foot **4-36** 36 Watts | 5097 lum **4-45** 45 Watts | 6372 lum **4-56** 56 Watts | 7930 lum **4-72** 72 Watts | 10196 lum	**27K**[1] 2700K **30K** 3000K **35K** 3500K **40K** 4000K **50K** 5000K	**8** Standard 80+ CRI **9** 90+ CRI	**DIRA** Standard Impact resistant Acrylic, Ribbed Clear Lens **PCC** Polycarbonate smooth clear lens **PCF** Polycarbonate smooth frosted lens	**010** Standard 0-10V 10% Dimming **LDE5** Ecosystem 5-Series 5% **LDE1** Ecosystem Hi-Lume 1% **ES566** eldoLED 0-10V SOLOdrive **BLS** Bi-Level Step 40/100% **BLSxx** Bi-Level Step xx/100% **TLS** Tri-Level Step 30/70/100% **TLSxxzz** Tri-Level Step xx/zz/100%	**V** Standard 10' V-Hook **AC120** 10FT Aircraft Cable Pendant Mount **(Blank)** Not Required	**EM8** 8W EM Battery Backup **EM15** 15W EM Battery Backup **EM20** 20W EM Battery Backup **WL-OS** Wet location occupancy Sensor **LO-OS** Low voltage occupancy sensor with day light & time delay control **LV-OS** Line voltage occupancy sensor with day light & time delay control **ELCU-200** Fail-to-on Emergency UL924 **LOD-500S-X** IP-66 rated external bi-level 0-10V occupancy sensor with DIP switch setting, Fail-to-on **TR** Tamper-Proof Latch **GLR** Fast Blow Fuse **GMF** Slow Blow Fuse **LT** Low Temperature (-40°F ~ 122°F) **HT** High Temperature (-31°F ~ 140°F) **AMB** Anti-Microbial Coating

1 Only available with 90+ CRI

SPEC GRADE · DIMMABLE · IP69K · WET LOCATION RATED · NSF · c UL us LISTED · MADE IN USA

PHOTOMETRICS

Standard

2FT

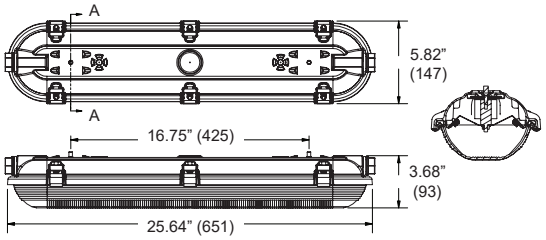

4FT

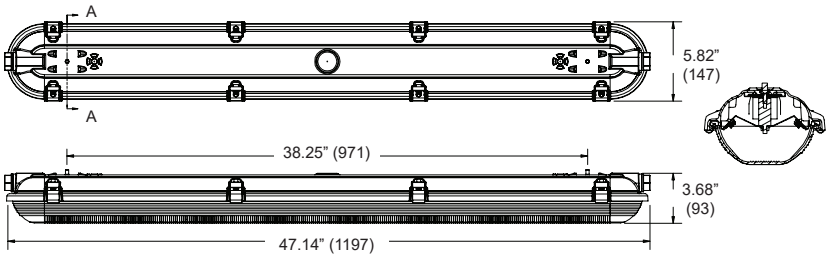

Low Profile

2FT

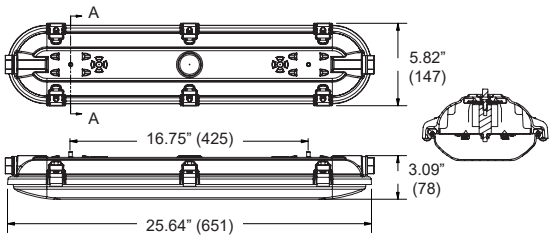

4FT

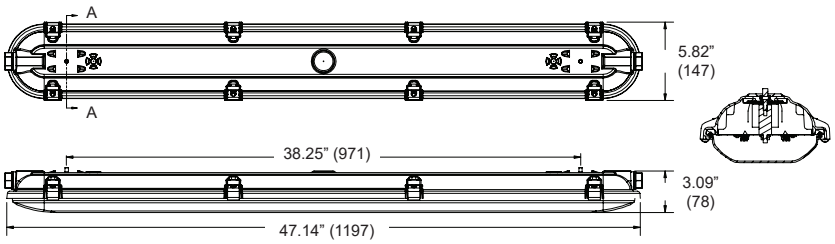

All dimensions are in inches (millimeters).

COMPATIBLE DIMMERS

Manufacturer	Dimmer SKUs
LUTRON®	NTSTV-DV NFTV DVTV DVSCTV DVSTV DVSCSTV QSGRJ-XP GRX-TVI 0-10V QSGRJ-XE QSGR-XE RMJ-5T
LEVITON®	IP710-LFZ
PHILIPS	SR1200ZTUNV
OSRAM	ZBHA-CLM DIM
ENCELIUM	EN-LCM-1R10V-GB2-BK EN-LCM-1R10V-GB2-BK/DR EN-ALC-1R10V-GB2-BK EN-ALC-1R10V-GB2-BK-DR
legrand	ADF-120277 FD-301 FSP-202
Synergy® LIGHTING CONTROLS	ISD BC
enlighted™ A Siemens Company	SU-3E-00 (Enlighted Compact Sensor)