

FIXTURE SPECIFICATIONS

INTENDED USE



This adjustable cylinder wall light offers functional versatility. The low-glare fixture can be used for interior and exterior retail or commercial purposes. The architectural LED downlight adds and enhances effects, safety and security. Downlighting only.

PRODUCT FAMILY

- 11218-DIR** Cylinder Direct
- 11218-ADJ** Cylinder Adjustable
- 11219-2D** Cylinder Direct Indirect
- 11220-DIR** Square Direct
- 11221-2D** Square Direct Indirect

FEATURES

- Construction:** Round One Piece High Grade Aluminum with corrosion-resistant finish that includes an adjustable led array that rotates 25° with optics
- Light Engine:** LED Chip-On-Board
- Lens:** Tempered Glass and Silicone O-Ring
- Lumen:** 1500lm (15W)
- Reflector:** Glare-Free, One piece, Heavy Gauge Aluminum
- Mounting:** Includes Bracket for Installation Directly to a 4" octagonal electrical junction-box
- Voltage:** 120V (Non-Dimming), 120V/277V (Dimming)
- CRI:** 84+
- Dimming:** Universal Dimming System Compatible with 2-Wire TRIAC, 3-Wire ELV, and 5-Wire 0-10V Dimmers
- Life:** L70 - 50,000 Hours
- Emergency:** 90 Minutes Minimum, Remote Test Switch, Plate Cover, Junction Box Included
- Listing:** ETL/cETL Listed Suitable for Wet Location. Assembled in the US (IP65)
- Electrical:** Electronic Direct Current Class 2 driver
- Warranty:** 5 Years Carefree for Parts and Components (Labor not included). We recommend the use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.
- Compliance:** Dark Sky Compliant when fixture is pointing downward.

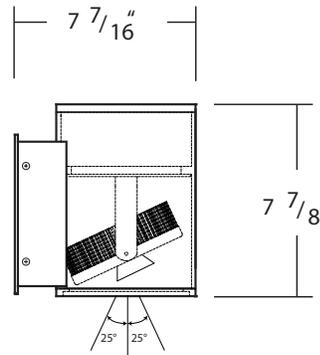

ORDERING INFORMATION Example: (11218-ADJ-B36-UNI-40K-WH-EM)

Model	Beam Spread	Dimming	Color Temperature	Finish	Options
11218-ADJ Pavo-Cylinder-Adjustable	B12 12° Spot B24 24° Narrow Flood B36 36° Flood B50 50° Wide Flood <i>Standard</i>	ND <i>Standard</i> Non-Dimming (120V) UNI Universal (120V / 277V)	27K 2700K 30K 3000K 35K 3500K 40K 4000K <i>Standard</i>	WH White BK Black SL Silver BZ Bronze	EM Emergency

COLOR TEMPERATURE GUIDE



2700K	3000K	3500K	4000K	5000K
WARM WHITE	SOFT WHITE GLOW	NEUTRAL GLOW	DAYLIGHT GLOW	CRYSTAL WHITE GLOW
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
✓	✓	✓	✓	✗