SPECIFICATION SHEET

Shop Now

Project Name: Type: Quantity:

INTENDED USE

This architectural cylinder wall light is a versatile low-glare lighting fixture. This product can be used indoors and outdoors for commercial or retail purposes. The downlight can also be used to accent and create dramatic effects or provide safety and security. This fixture is exclusively designed for downlighting.




PRODUCT FAMILY

11218-D	Cylinder Direct
11218-ADJ25	Cylinder Adjustable
11219-DI	Cylinder Direct Indirect
11220-D	Square Direct
11221-DI	Square Direct Indirect

FEATURES

Construction: Round One Piece High Grade Aluminum with corrosion-resistant finish
Light Engine: LED Chip-On-Board
Lens: Tempered Glass and Silicone O-Ring
Reflector: Glare-Free, One piece, Heavy Gauge Aluminum
Mounting: Includes Bracket for Installation Directly to a 4" octagonal electrical junction-box
Voltage: 120V (Non-Dimming), 120V/277V (Dimming)
CRI: 84+
Dimming: Universal Dimming System Compatible with 2-Wire TRIAC, 3-Wire ELV, and 5-Wire 0-10V Dimmers
Life: L70 - 50,000 Hours
Emergency: 90 Minutes Minimum, Remote Test Switch, Plate Cover, Junction Box Included
Listing: ETL/cETLus Listed Suitable for Wet Location. Assembled in the US (IP65)
Electrical: Electronic Direct Current Class 2 driver
Warranty: 5 Years Carefree for Parts and Components (Labor not included). We recommend the use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.
Compliancy: Dark Sky Compliant when fixture is pointing downward.

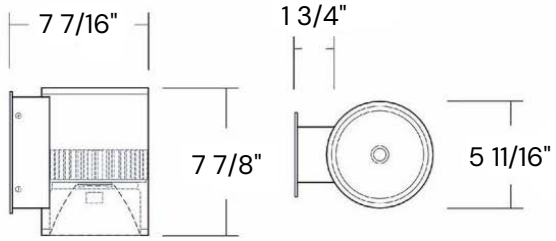

SPEC GRADE · DIMMABLE · 5 YEAR WARRANTY · ETL LISTED · cETLus · WET · IP65 · EMERGENCY BATTERY · DarkSky · ASSEMBLED IN USA


ORDERING INFORMATION Example: 11218-D-10L-B2-ND-27K-WH-XEM

Model	Lumen	Beam Spread	Dimming	Color Temperature	Finish	Options
11218-D Pavo-Cylinder	**10L** 1000 lm (10W) Standard **15L** 1500 lm (15W) **22L** 2200 lm (22W) **26L** 2600 lm (30W)	**B2** 2° Narrow Spot **B10** 10° Spot **B20** 20° Wide Spot **B45** 45° Flood **B60** 60° Wide Flood Standard **WW** Wall Wash **BIV** Type IV (forward throw)	**ND** Standard Non-Dimming (120V) **UD** Universal (120V / 277V)	**27K** 2700K **30K** 3000K **35K** 3500K **40K** 4000K Standard **50K** 5000K	**WH** White **BK** Black **SL** Silver **BZ** Bronze	**XEM** Emergency Battery (External) **GSH** Glare Shield


Footcandles On Wall

5.0 fc 2.0 fc 1.0 fc 0.5 fc


STANDARD BEAM Wide Flood (Blank)

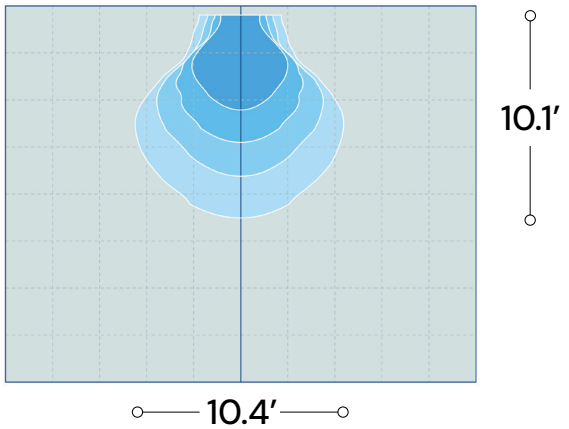


CLEAN BEAM – (-B02)

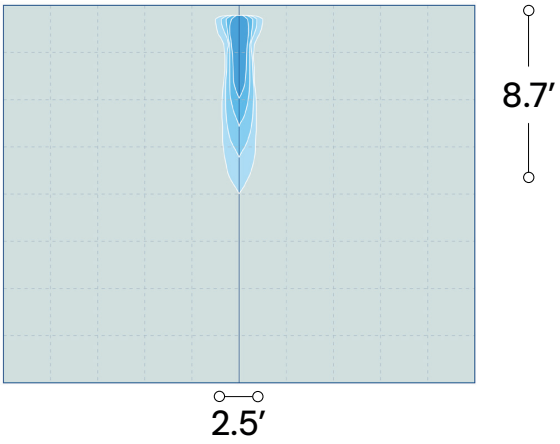


CLEAN BEAM – (-CB20)

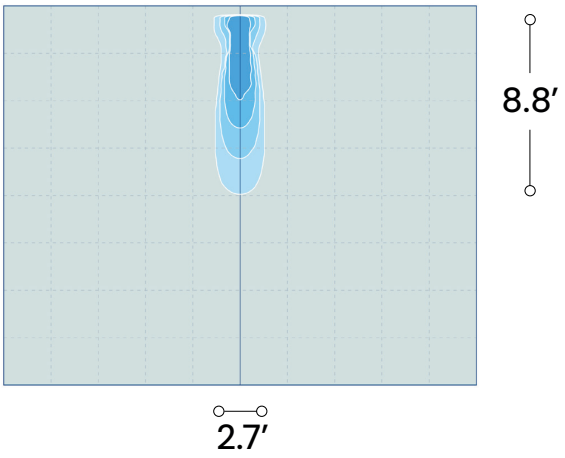

CLEAN BEAM – (-CB35)

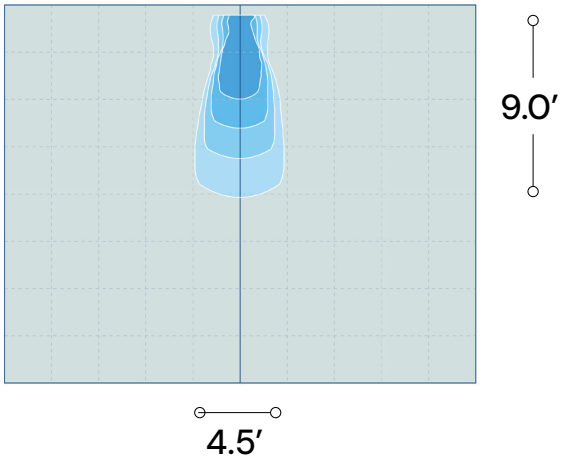


SPECIALTY BEAM – Wall Wash (-BWW)

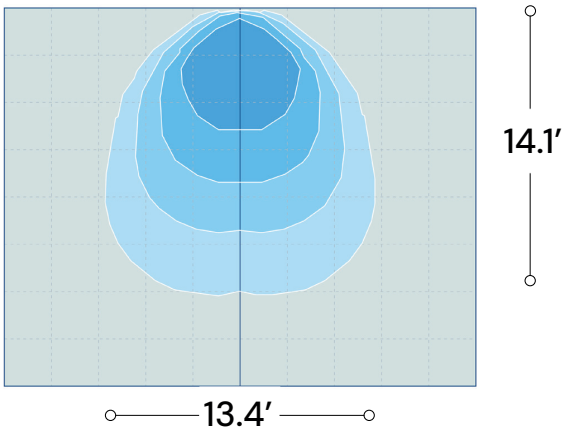


Footcandles On Wall and Ground

5.0 fc 2.0 fc 1.0 fc 0.5 fc


STANDARD BEAM Wide Flood (Blank)

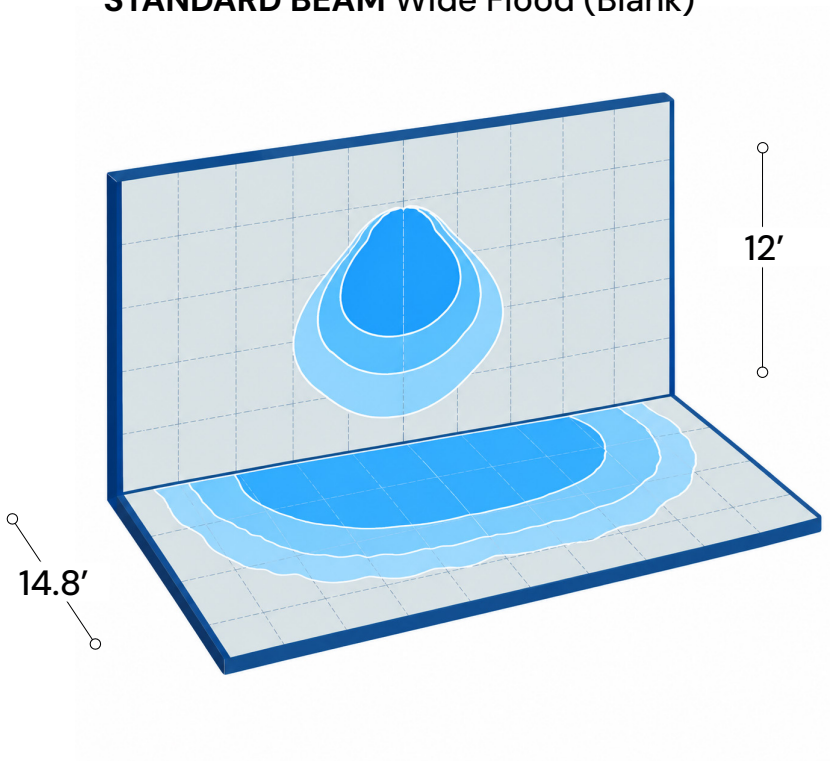

SPECIALTY BEAM - Type II (-BII)

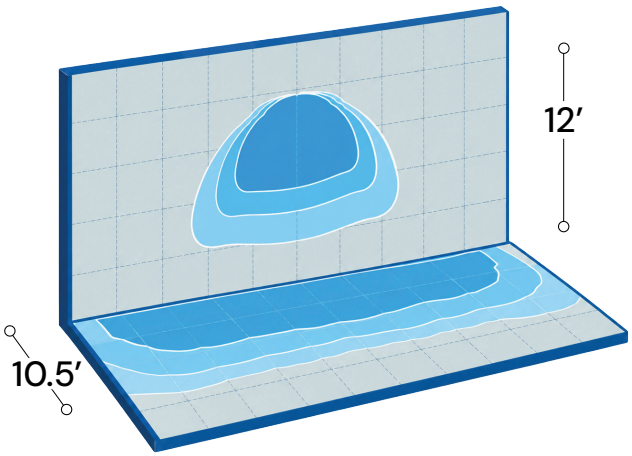

SPECIALTY BEAM - Type IV (-BIV)

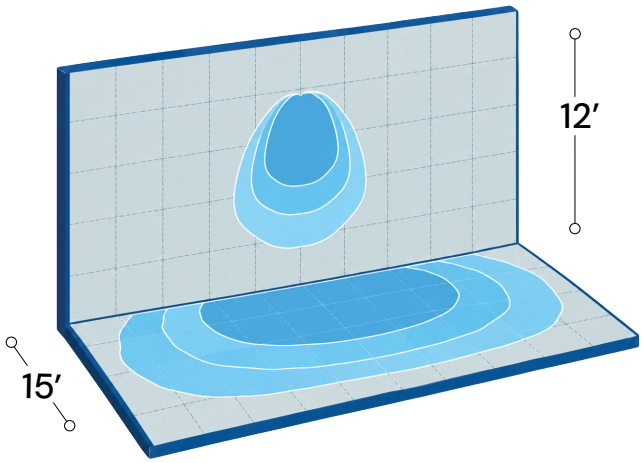


COLOR TEMPERATURE GUIDE
2700K
WARM WHITE
friendly
personal
intimate
HOMES
LIBRARIES
RESTAURANTS
3000K
SOFT WHITE GLOW
soft
warm
pleasing
HOMES
HOTEL ROOMS
LOBBIES
RETAIL STORES
3500K
NEUTRAL GLOW
sociable
inviting
non-threatening
EXECUTIVE OFFICES
RECEPTION AREAS
SUPERMARKETS
4000K
COOL WHITE GLOW
neat
clean
efficient
OFFICES
CLASSROOMS
MASS MERCHANDISERS
SHOWROOMS
5000K
DAYLIGHT GLOW
bright
cool
alert
GRAPHICS INDUSTRY
HOSPITALS
GALLERIES
BEAUTY SALONS