

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Mount this LED light on the wall for lighting from a single cylinder in diecast aluminum for applications such as al fresco dining, commercial space, residential buildings and campuses. This architectural and commercial-grade light includes a choice of trim styles and suits residences, too.

DETAILS

Construction: 6061 marine grade corrosion resistant aluminum

Voltage: 120-277V

Dimming: TRIAC and ELV


Life: 50,000 Hours

Listing: Suitable for wet location, Made in America

Warranty: 5 years carefree for parts & components. (Labor not included)



ORDERING INFORMATION Example: (11230-D-30-GR)

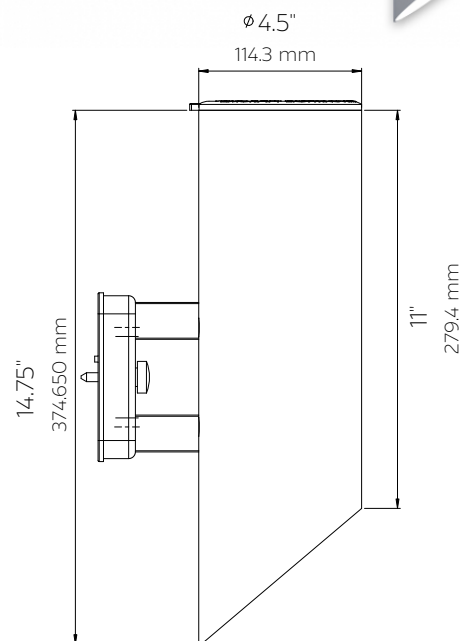

Alcon Lighting 11230 Wall Bias-Cut Cylinder

Model	Light	Color Temp	Finish
11230	D Direct 10W 960L	27 ¹ 2700K	WH White
	D/I Direct Indirect 20W 1920L	30 3000K	BK Black
		35 3500K	GR Gray
		40 ¹ 4000K	BA Brushed Aluminum
			BR Bronze

¹ Non-standard color temperatures require longer lead time

COMPATIBLE DIMMERS FOR STATIC WHITE

Manufacturer	Model	Type
Leviton	ILLUMATECH IPL06	LEADING EDGE
Lutron	NOVA T NTLV-600	LEADING EDGE
Lutron	SKYLARK S-600	LEADING EDGE
Leviton	IG4005 6631	LEADING EDGE
Lutron	LUMEA LG-600P	LEADING EDGE
Leviton	VPE06	TRAILING EDGE
Lutron	SELV-303P	TRAILING EDGE

COLOR TEMPERATURE GUIDE

