

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The specification grade **Alcon Lighting Block Commercial LED Linear Surface Direct Down Light Strip** delivers continuous clean lines and clear light to commercial, hospitality and residential interior flush mount lighting applications. Our modern, slim profiles and stylish ceiling light fixture designs offer excellent illumination, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS

2FT | W 2.75" x L 24" x H 3.625"

4FT | W 2.75" x L 48" x H 3.625"

8FT | W 2.75" x L 96" x H 3.625"

Custom Length | Consult Factory

FEATURES

Construction: Die-Formed and Welded 22-Gauge Cold Rolled Steel

Finish: White

Lens: Glare Free Snap In Frosted Acrylic for Even Distribution

Voltage: 120-277V



CRI: 80+ standard, 90+ optional

Dimming: 0-10V

Life: 50,000 Hours

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Listings: cETLus Listed, UL/cUL Listed, DLC Listed, Suitable for Damp Locations

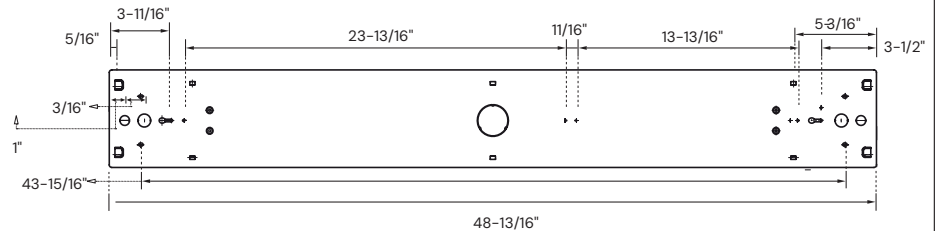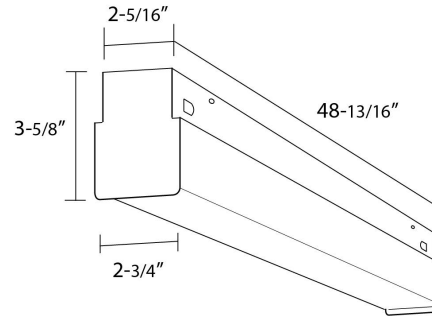

ORDERING INFORMATION Example: (11243-2-D218-30K-EM5)

Model	Wattage Lumens	Color Temp	Options	Optional Controls
11243-2 24" Surface	D218 18 Watts 1944 Lumens D236 36 Watts 3888 Lumens	Residential 30K 3000K Commercial 35K 3500K 40K 4000K Industrial 50K 5000K	EM5 5W Emergency Ballast EM8 8W Emergency Ballast EM16 16W Emergency Ballast DD Integrated Daylight Dimming Photosensor OS Integrated Occupancy Sensor	Optional LE Lutron EcoSystem™ BM Bluetooth Mesh
11243-4 48" Surface	D427 27 Watts 2916 Lumens D436 36 Watts 3888 Lumens D454 54 Watts 5832 Lumens			
11243-8 96" Surface	D854 54 Watts 5832 Lumens D872 72 Watts 7776 Lumens D8108 108 Watts 11664 Lumens			