

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

Alcon Lighting's Outdoor Linear Wall Wash LED Light is expertly designed for illuminating building facades, signage, and other wall-washing applications. Available in four sizes and five color temperatures (2700K, 3000K, 3500K, 4000K, 5000K), this fixture offers versatile lighting solutions for a wide range of projects. With a variety of optical lens options—including narrow, medium, wide, and elliptical beams—this light can be tailored to meet specific needs. Choose from three premium finishes: white, black, or titanium grey, to seamlessly integrate with any architectural style.

### FEATURES

**Construction:** Extruded Aluminum  
**Color Temperature:** 27/30/35/40/50K  
**CRI:** 90+  
**Voltage:** 120-277V  
**Driver:** 0-10V  
**Operating frequency:** 50/ 60 Hz  
**Power Consumption:** 9 watt per ft.  
**Lumen Output:** 100 lumens per watt (35K)  
**Max run:** Linkable up to 60 ft.  
**Operating Temperature:** -40°F to 122°F  
**Life:** 50,000 Hours  
**Listing:** ETL Listed, IP66 Outdoor/ Wet Location  
**Warranty:** 5 years carefree for parts & components (Labor not included).



Size	Wattage	Lumens
1'	9W	900lms
2'	18W	1800lms
3'	27W	2700lms
4'	36W	3600lms






### ORDERING INFORMATION Example:


Model	Length	Optics	Color Temp	Finish	Mounting	Accessories
<b>11245</b>	<b>1</b> 1 ft.	<b>15</b> 15°	<b>27K</b> 2700K	<b>BK</b> Black	<b>ST</b> <sup>2</sup> Standard	<b>LC1</b> 1 ft. Link Cable
	<b>2</b> 2 ft.	<b>20</b> 20°	<b>30K</b> 3000K	<b>WH</b> White	Tilting	<b>LC3</b> 3 ft. Link Cable
	<b>3</b> 3 ft.	<b>35</b> 35°	<b>35K</b> 3500K	<b>TG</b> Titanium Grey	<b>ET</b> Extended	<b>LC6</b> 6 ft. Link Cable
	<b>4</b> 4 ft.	<b>50</b> 50°	<b>40K</b> 4000K		Tilting	
		<b>WW</b> <sup>1</sup> 10° x 40°	<b>50K</b> 5000K		<b>F</b> Fixed	<b>HC6</b> 6 ft. Hardwire Cable
						<b>HC10</b> 10 ft. Hardwire Cable
						<b>LV</b> Symmetric Anti-Glare Louver

<sup>1</sup> For wall wash applications


<sup>2</sup> Two Standard Tilting brackets are included. Further information in Pg. 3.




11245-1

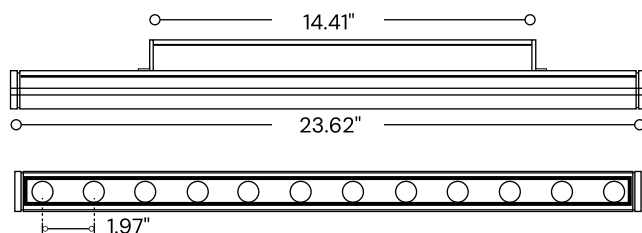

11245-2

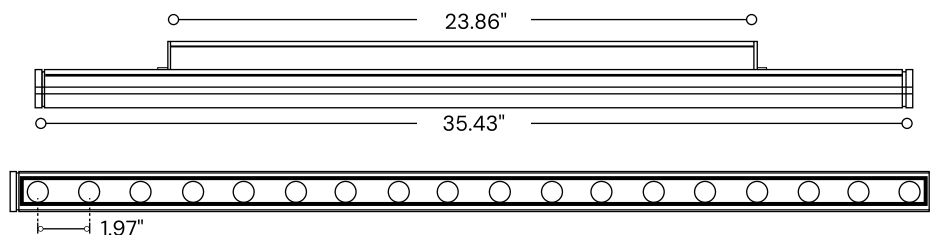


11245-3

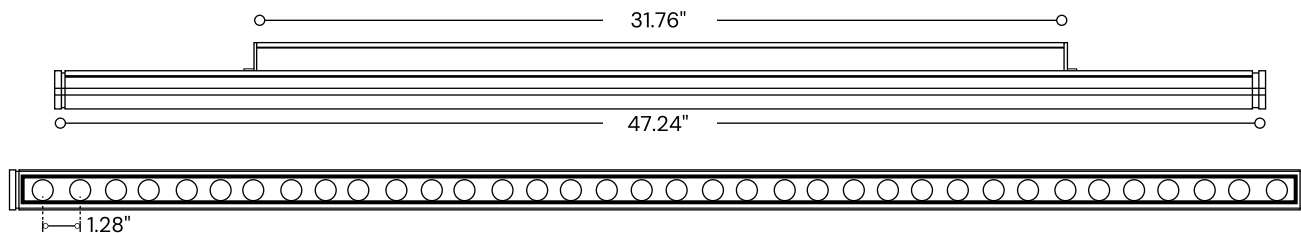


11245-4


## OPTICS



15°




20°



35°



50°






10° X 40°

## MOUNTING BRACKETS

### Standard Tilting

Included with every Fixture






### Fixed Mounting

Sold separately



### Extended Tilting

Sold separately



## ACCESSORIES

### Link Cable

Link extension cable is available in 1 ft., 3 ft., and 6 ft.

LC1  
LC3  
LC6



### Hardwire Cable



Hardwire cable is available in 6 ft. and 10 ft.

HC6  
HC10



### Symmetric Anti-Glare Louver

LV



## COMPATIBLE DIMMERS

	ALCON LIGHTING	LUTRON	LEVITON®
0-10 V	<a href="#">2100</a> <a href="#">2101</a> <a href="#">2102</a>	Diva DTVV	IP-710-DL

## COLOR TEMPERATURE GUIDE

