

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE

Our outdoor architectural specification-grade linear wall-mounted light showcases signs or works of art. The fixture comes with an option to extend the length for lighting wider wall areas. Constant and evenly distributed illumination from beginning to the end of runs adds value to commercial or residential settings. Made in America.

### FEATURES

**Construction:** Extruded aluminum

**CRI:** 90+

**Lens:** Clear

**Lumens:** 646 lm/ft, 726 lm/ft

**Wattage:** 7.5 W/ft, 9.6 W/ft

**Driver:** External IP68-rated universal driver capable of 0-10V, MLV, ELV, TRIAC dimming to 1%.

**Voltage:** LED 24VDC & driver 120-277V

**Life:** 50,000 hours

**Listings:** cULus, Made in the USA

**Warranty:** 5 years carefree for parts & components (Labor not included).






### ORDERING INFORMATION Example:

Model	Length	Color Temp	Arm Length	Finish <sup>2</sup>	Wattage   Lumens per foot
11704	(Code) <sup>1</sup>	27K 2700K 30K 3000K 35K 3500K 40K 4000K	6 6" 12 12"	SL Silver WH White BK Black BZ Bronze	7W 7.5 Watts   646 lm 9W 9.6 Watts   726 lm



#### Profile Dimensions

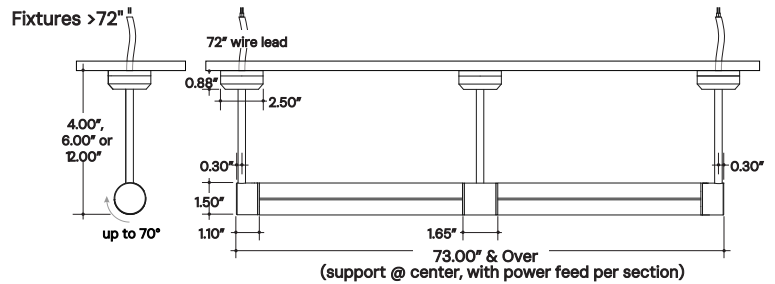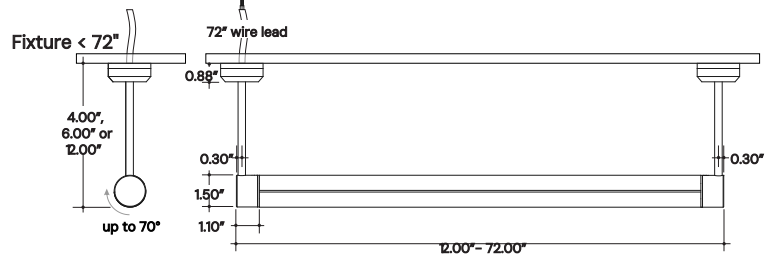

Fixture Head Rotates 70°

<sup>1</sup> To determine the length, refer to the table on page 2 and select a value from the CODE "Nominal Length" column. Fixtures exceeding 72" consist of two separate fixtures, each requiring its own driver.  
<sup>2</sup> Extended lead times will apply on all finishes other than silver.

# POWER CONSUMPTION

CODE Nominal Length (in)	Actual Length	Wattage		CODE Nominal Length (in)	Actual Length	Wattage	
		7W	9W			7W	9W
12	10 8/16	7.6	9.7	47	46 13/16	27.6	35.1
13	12	7.6	9.7	48	---	---	---
14	13 8/16	7.6	9.7	49	48 6/16	28.2	35.9
15	---	---	---	50	49 14/16	29.5	37.6
16	15 1/16	7.6	9.7	51	---	---	---
17	16 9/16	8.9	11.3	52	51 6/16	30.1	38.4
18	---	---	---	53	52 14/16	31.4	40.2
19	18 1/16	9.5	12.1	54	---	---	---
20	19 9/16	10.7	13.6	55	54 7/16	32.0	41.1
21	---	---	---	56	55 15/16	33.3	42.9
22	21 2/16	11.4	14.4	57	---	---	---
23	22 10/16	12.6	16.0	58	57 7/16	34.0	43.8
24	---	---	---	59	58 15/16	35.2	45.5
25	24 2/16	13.2	16.8	60	---	---	---
26	25 10/16	14.5	18.3	61	60 7/16	36.5	47.3
27	---	---	---	62	62	37.2	48.2
28	27 2/16	15.1	19.1	63	---	---	---
29	28 11/16	16.4	20.7	64	63 8/16	38.4	50.0
30	---	---	---	65	---	---	---
31	30 3/16	17.0	21.4	66	65	39.1	50.8
32	31 11/16	18.2	23.0	67	66 8/16	40.4	52.5
33	---	---	---	68	---	---	---
34	33 3/16	18.9	23.8	69	68 1/16	41.0	53.4
35	34 12/16	20.1	25.3	70	69 9/16	42.3	55.1
36	---	---	---	71	---	---	---
37	36 4/16	20.7	26.1	72	71 1/16	42.9	55.9
38	37 12/16	22.0	27.6				
39	---	---	---				
40	39 4/16	22.6	28.4				
41	40 13/16	23.9	30.1				
42	---	---	---				
43	42 5/16	24.5	30.9				
44	43 13/16	25.7	32.6				
45	---	---	---				
46	45 5/16	26.4	33.4				

## FINISH

Silver



Black




Bronze



White



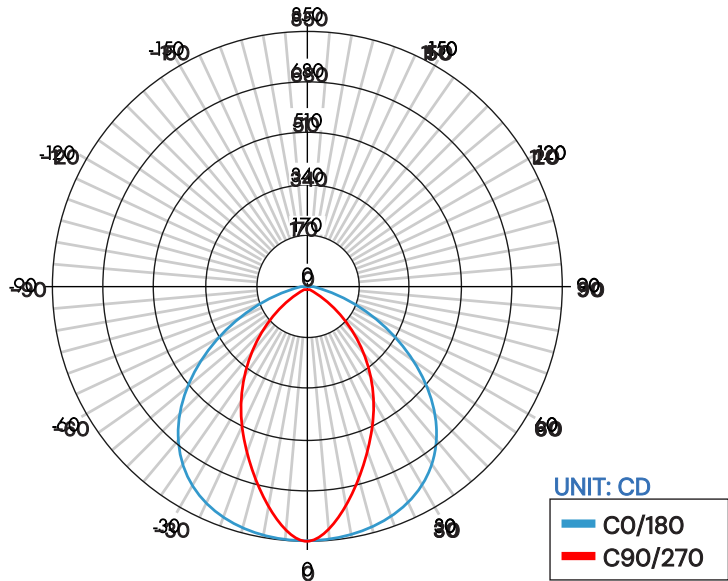


11704 -48-4L-40K-4-SA-XX

Zonal Lumen Summary 4000K


Zone	Lumen	% Fixture
0-30	582	35%
0-40	892	54%
0-60	1393	85%
0-90	1625	99%
0-180	1641	100%

Total

Beam Angle



Sample System Layout

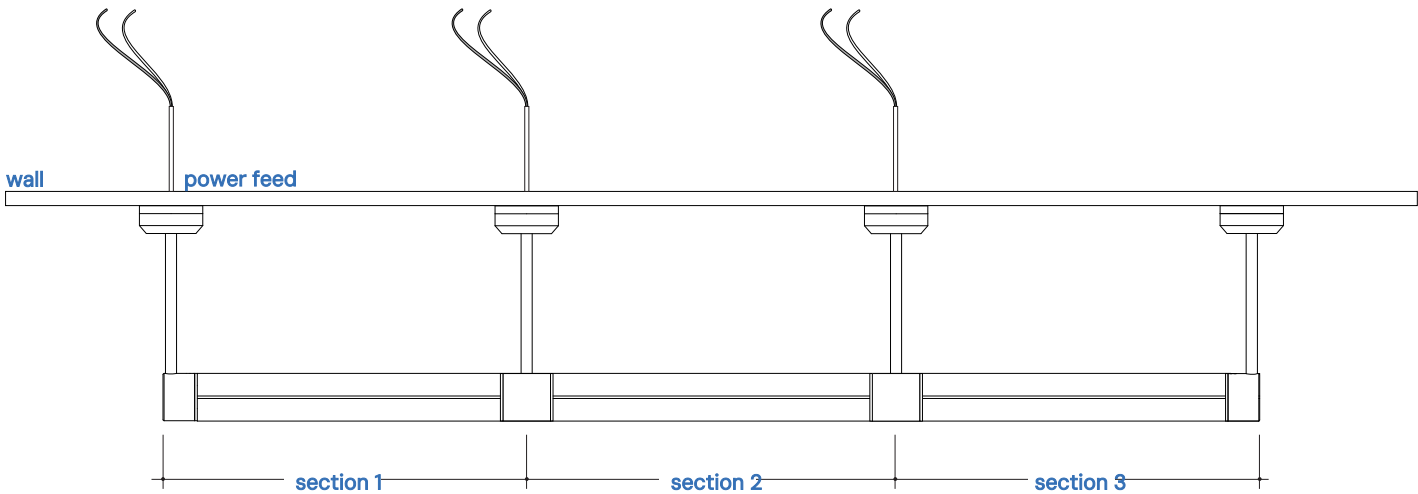



## COLOR TEMPERATURE GUIDE

