




12100-20 | 12100-40 - INSTALLATION INSTRUCTIONS FOR PENDANT-CABLE MOUNT




Specifications: 12100-20

Width: 2.5 (64)

Depth: 4 (101)


All dimensions are in inches (millimeters).



Specifications: 12100-40

Width: 4 (101)

Depth: 4 (101)

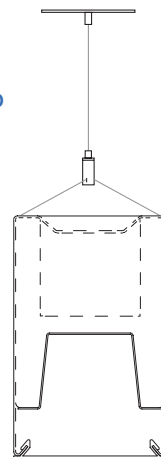

Cable

PART LIST

A: Canopy bracket

B: Power cord

C: Power feed canopy


D: Grip lock

E: Aircraft cable


F: Threaded stud

G: Cable mounting nut


H: Screws

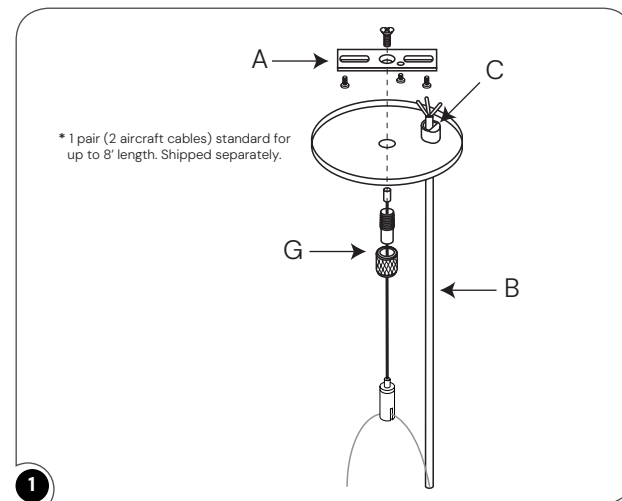

Install canopy bracket(A) on to j-box and Run power cord(B) through Power feed canopy(C) and secure the power cord inside the canopy. Connect the power cord to the ceiling power feed from j-box. Place canopy in position on Threaded stud and secure with cable mounting nut(G).

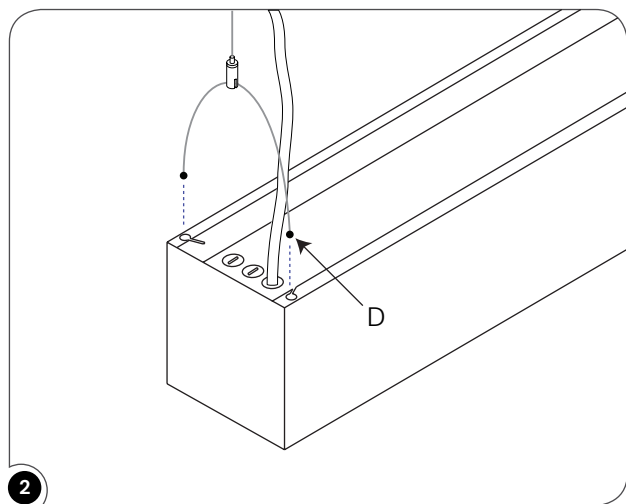

Install Grip lock(D) to each end of housing.

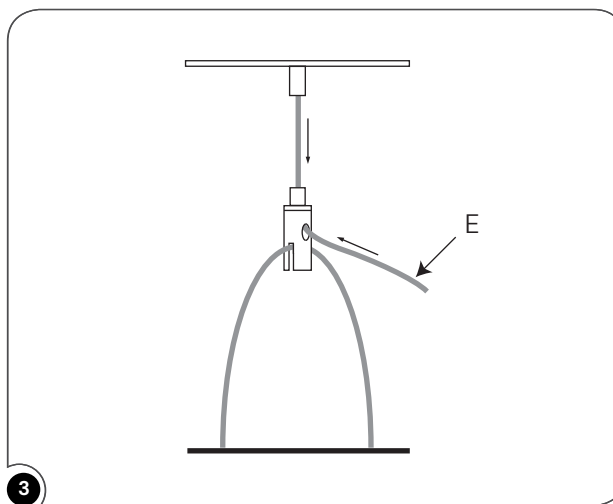


Run Aircraft cable(E) through Grip lock installed on fixture and adjust height by pushing Grip lock.

CONTINUES ROW

TOOL(S) NEEDED:

Option 1) Cordless drill and an elbow or L-shape adapter with Philips Insert Bit extension.

Option 2) Flexible Screwdriver with Philips Insert Bit.

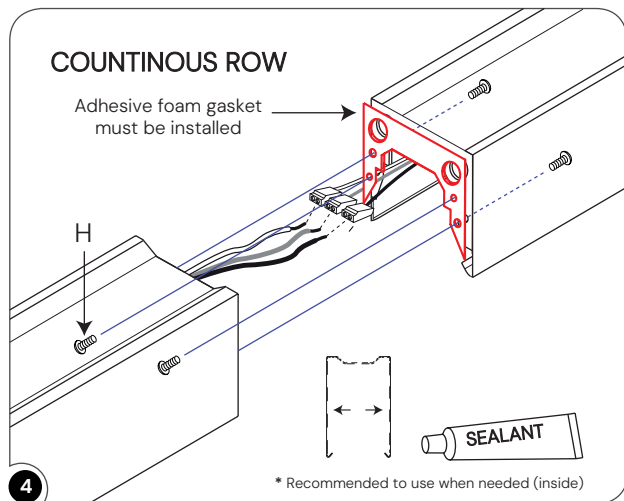

- 1) Make wiring connection from each fixture power supply wires together.
- 2) Align fixtures and screw together with 4 screws(H).



12100-20 | 12100-40 - INSTALLATION INSTRUCTIONS FOR PENDANT-CABLE MOUNT

