


INSTALLATION INSTRUCTIONS

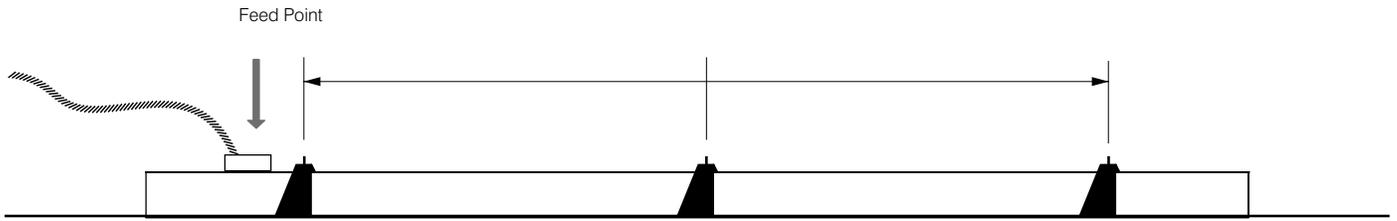

Ceiling cutout (not including flange)

CODE	FIXTURE LENGTH	FIXTURE CUTOUT LENGTH
A	24"	24.5"
B (4)	46.5"	47"
C (6)	69"	69.5"
D (8)	91.5"	92"

Drywall bracket
Supports

Please make sure the drywall bracket are anchored to surface strong enough to hold at least 50lb (25kg) of weight. **Reinforcement may be required depending on ceiling type.**


Read and follow these instructions before installing or maintaining this product

- This product is suitable for **DRY INDOOR LOCATIONS ONLY**
- Make sure this product is **NOT** on the same circuit as inductive loads, (e.g. fluorescent bulbs, discharge bulbs, ventilation fans, etc...)
- Allow air to flow freely around the fixture
- Do not switch on line voltage until all wiring is complete
- Incorrect wiring will result in irreparable damage to LED and power supply
- This product should only be installed by a licensed electrician


Warranty

- This product must be installed in accordance with all applicable installation codes and ordinance
- Limited five (5) years warranty
- Warranty is void in the eventuality of unauthorized modifications and/or improper use


INSTALLATION INSTRUCTIONS

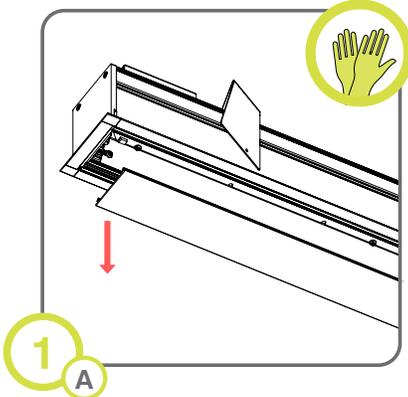


1 A
Carefully detach lens starting from the gasket end. **DO NOT** remove from the side as this may cause cracking.

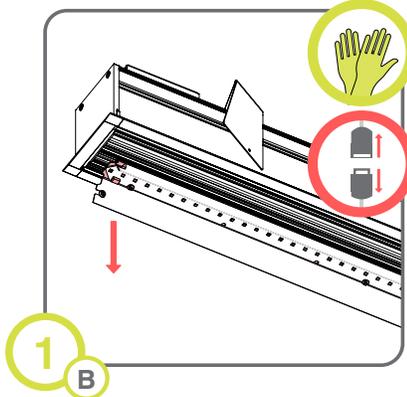

1 B
Separate reflector from fixture and disconnect.

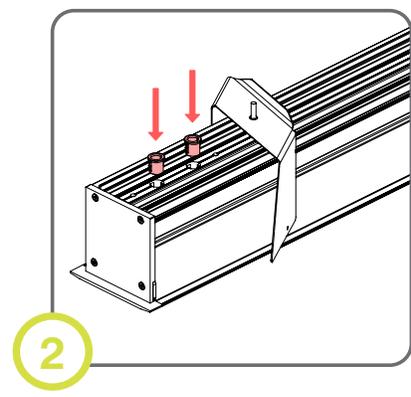


2
Install bushings in Vesta.

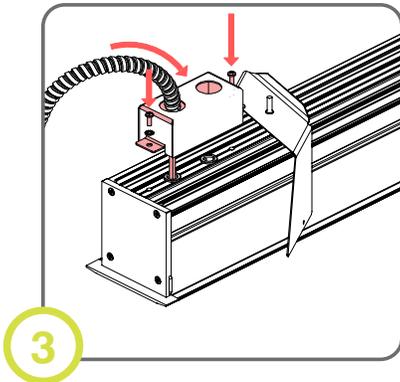


3
Feed BX cable into termination box and install on Vesta. BX connectors supplied by others.

Wiring Color Code	
Color	Function
No thread	Line
White	Neutral
Green	Ground
Blue	Dim Positive
Brown	Dim Negative

4
Feed wire through bushings. Make electrical connections.

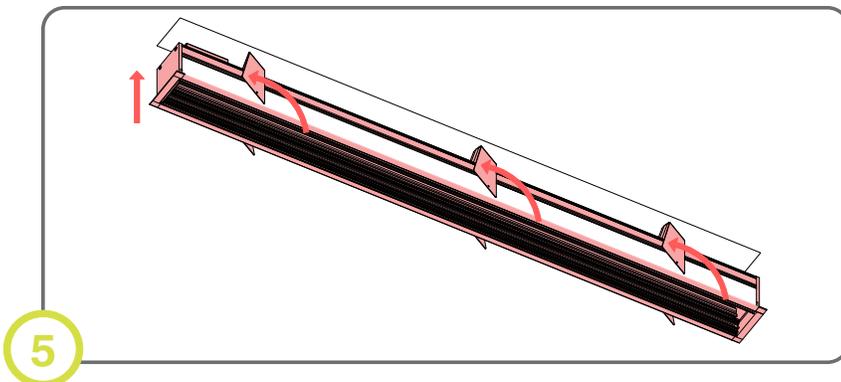


5
Collapse brackets and slide fixture into ceiling. For uneven surfaces, apply silicone around flange before installing Vesta.

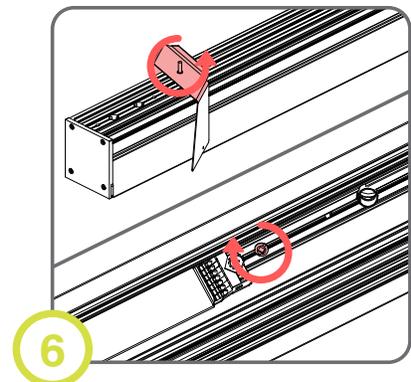


6
Turn screw to rotate bracket and secure to ceiling until gasket compresses adequately

INSTALLATION INSTRUCTIONS

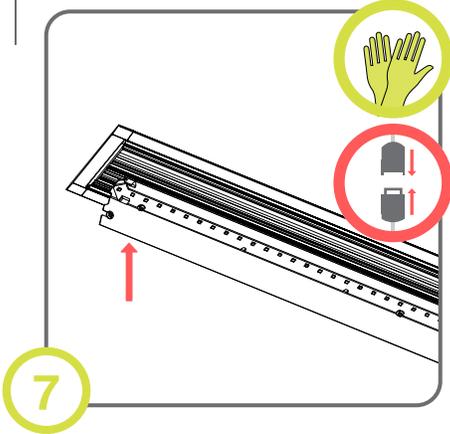


7

Reconnect reflector and install in Vesta.

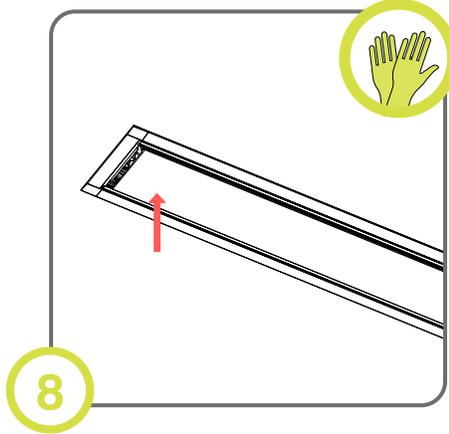


8

Place one end of the lens back in Vesta 1/8 inch from the end.

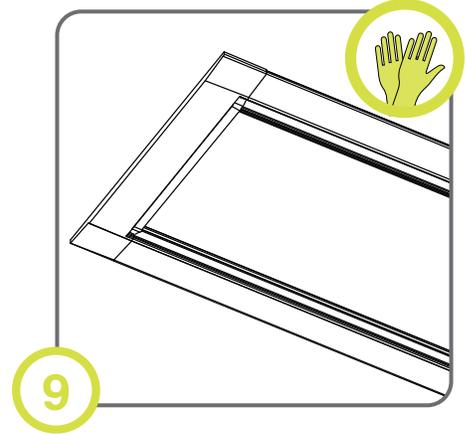

9

Slide lens until sealed against rubber gasket.

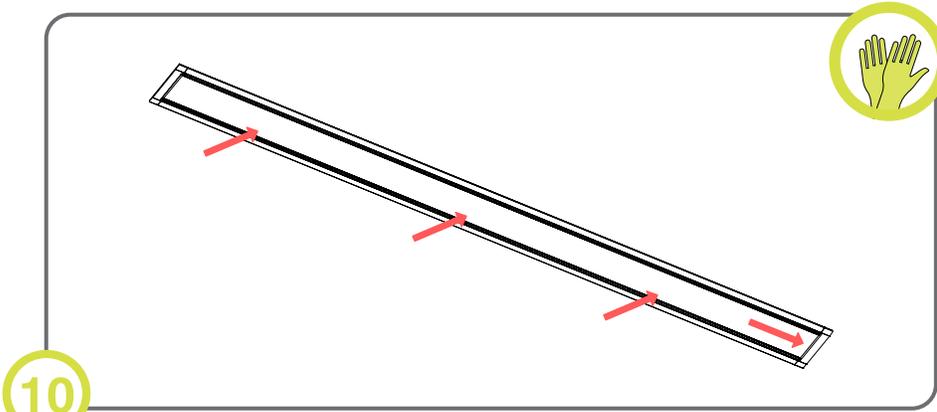

10

Repeat step 8 on the other side. Starting at one end, press the rest of the lens into the Vesta to complete installation.